# Drive Contactors
## Type BHD & EHDB

AC 1012


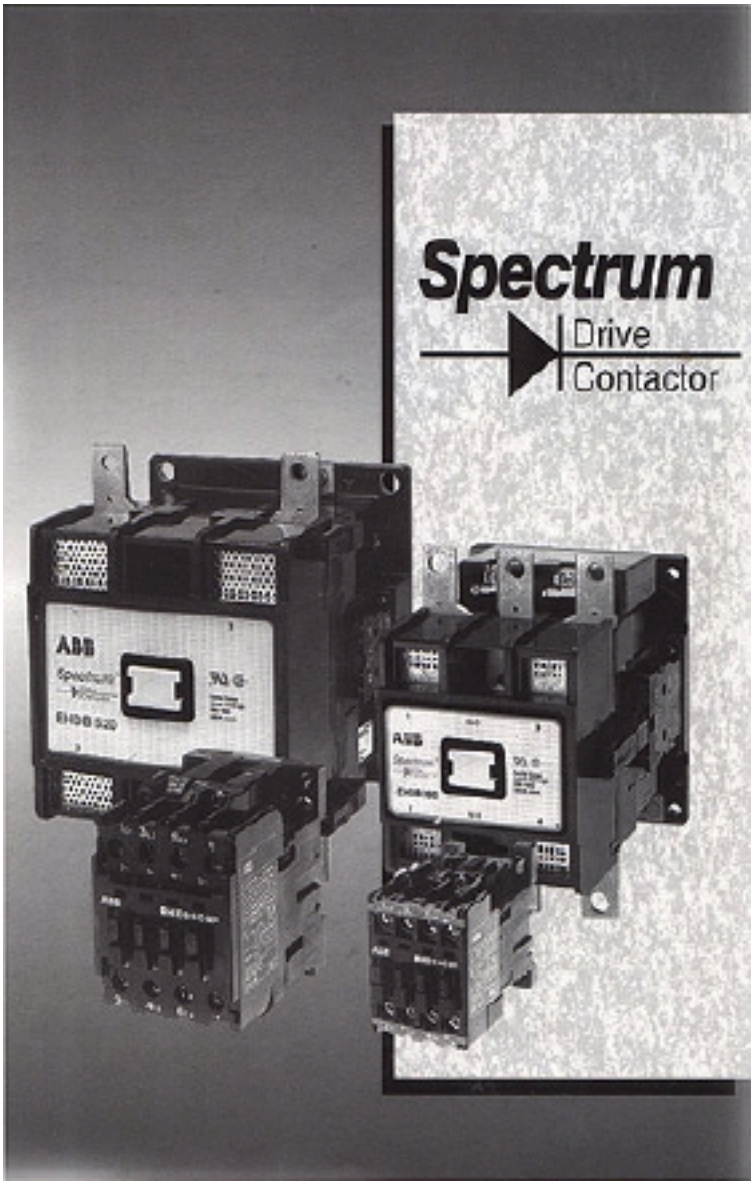



ABB Control Inc.

# Drive contactors
## Type BHD & EHDB

**EHDB Improvements!**
- **Increased electrical & mechanical endurance**
- **Dynamic braking pole with increased current ratings**

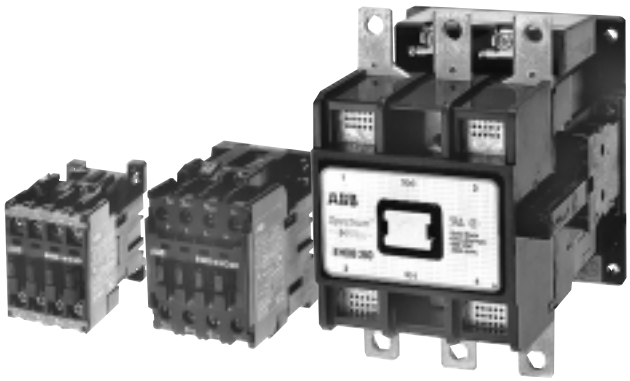


### Description
BHD & EHDB are ABB Control's new offering of high quality, Spectrum Drive Contactors for variable speed DC drive applications. This line supersedes the highly-accepted and well-respected EFLG and EHD line. The new line offers a broader range featuring both smaller (15 amp) and larger (650, 800 and 960 amp) contactors as well as additional midrange sizes.

### Type BHD
- 15, 30 & 60 amps in three sizes
- 500 volt DC ratings
- 160 and 300 volt DC normal closed ratings for dynamic braking
- Low energy auxiliary contacts available (17V, 5mA)
- Mechanically interlocked version available for reversing applications
- Small compact design
- 2 pole (2 N.O.) and 3 pole (2 N.O. & 1 N.C.) available
- Additional auxiliary contact blocks available
- Fast, snap-on DIN rail mounting
- Double break contact design
- Captive terminal screws
- Touch-safe design: all connection terminals are protected against accidental touch
- Terminals supplied open for ease of wiring
- Operates over an extended voltage range of 85% to 100% of rated control voltage
- N.C. dynamic braking pole is easily added to two pole contactors
- Screwdriver guide holes
- Snap-on front mounted accessories
- UL and CSA approved


### Type EHDB
- 75 amps to 960 amps in ten sizes
- 2 pole (2 N.O.) and 3 pole (2 N.O. & 1 N.C.) power poles available
- 600 VDC making capacity: 300 VDC breaking capacity
- Auxiliary contacts suitable for low energy applications are standard (17V, 5mA)
- 1 N.O. & 1 N.C. auxiliary contacts are standard and up to six additional auxiliary contacts may be added to provide a total of 8 (4 N.O. & 4 N.C.)
- Early make & late break auxiliary contacts available
- Auxiliary contacts available to meet EN 81 standards
- EHDB 220, 280 & 360 contactors have withdrawable coils
- Mechanically interlocked contactors available for reversing applications
- Double break contact design with magnetic arc chamber extinguishes arc in shortest possible time
- High temperature encapsulated coil
- Easy removal of arc chute for quick inspection and change of contacts
- Operates over an extended voltage range of 85% to 110% of rated control voltage
- DC control operation available
- UL & CSA approved
  UL File # E36583
  CSA File # LR19700

This catalog is published for information purposes only and is not all inclusive. For additional information on products or technical information, consult ABB Control Inc. The installation and use of ABB Control Inc. products should be in accordance with the provisions of the U.S. National Electrical Code and/or other local codes or industry standards that are pertinent to the particular end use. Installation or use not in accordance with these codes and standards could be hazardous to personnel and/or equipment.

# Drive contactors
## Type BHD
## 15 to 60 Amps



BHD15C3P-1



BHD30C3P-1

### 2 & 3 pole — 500 volt N.O. ratings with 160 volt N.C. dynamic braking rating

| Thermal amp rating | Maximum amp rating N.C. contact | | Auxiliary contacts included | | 2 pole (2 N.O.) | | 3 pole (2 N.O. & 1 N.C.) | |
|---|---|---|---|---|---|---|---|---|
| | Make 300 VDC | Break 160 VDC | N.O. | N.C. | Catalog number | List price | Catalog number | List price |
| 15 | 24 | 14 | —<br>1 | —<br>1 | —<br>BHD15C2P-1 | —<br>**$ 86** | BHD15C3P-1<br>— | **$ 116**<br>— |
| 30 | 45 | 28 | —<br>1 | —<br>1 | —<br>BHD30C2P-1 | —<br>**128** | BHD30C3P-1<br>— | **168**<br>— |
| 60 | 90 | 55 | 2<br>1 | 1<br>1 | —<br>BHD60C2P-1 | —<br>**206** | BHD60C3P-1<br>— | **256**<br>— |

### 3 pole — 500 volt N.O. ratings with 300 volt N.C. dynamic braking rating

| Thermal amp rating | Maximum amp rating N.C. contact | | Auxiliary contacts included | | | 3 pole (2 N.O. & 1 N.C.) | |
|---|---|---|---|---|---|---|---|
| | Make 500 VDC | Break 300 VDC | N.O. | N.C. low energy | N.C. | Catalog number | List price |
| 15 | 24 | 14 | 1 | 1 | 1 | BHD15C-1 | **$ 124** |
| 30 | 45 | 28 | 1 | 1 | 1 | BHD30C-1 | **184** |
| 60 | 90 | 55 | 1 | 1 | 1 | BHD60C-1 | **286** |

NOTE: BHD60 2 & 3 pole contactors are equipped with poloarity-dependent N.O. contacts.

### Description

BHD drive contactors are specifically designed for use with solid state D.C. adjustable speed drive systems. In drive applications, the contactor is not required to make or break the load during normal operation. The N.C. contact is used for dynamic braking applications.

### Coil voltage selection

All catalog numbers include a 120V coil. To select other coil voltages, substitute the code from the coil voltage selection chart for the first digit after the dash in the catalog number.

### Coil voltage selection chart

| | Volts | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 24 | 48 | 110 | 120 | 125 | 208 | 220 | 240 | 277 | 380 | 415 | 440 | 480 | 500 | 600 |
| 60 | F | G | | 1 | | B | | 2 | C | | | 3 | 4 | | 6 |
| 50 | N | | 1 | | | | J | | | 3 | 4 | | | 6 | |
| DC | Y | W | P | | Q | | R | | | | | | | | |

NOTE: DC coils are available for BHD60 contactors only.

### Additional auxiliary contacts

| Contactor number | Number of auxiliary contacts that may be added to BHD contactors |
|---|---|
| BHD15C3P-1 | (1 – 4) CA7 Aux |
| BHD30C3P-1 | (1 – 4) CA7 Aux |
| BHD15C2P-1 | (1) DB Adder deck or<br>(1 – 4) CA7 Aux |
| BHD30C2P-1 | (2) CA7 & (1) CAL7 Aux |
| BHD60C3P-1 | (1 – 6) CA7 & (1) CAL7 Aux or<br>(1 – 6) CA7 & (1) CAL7 Aux |
| BHD60C2P-1 | (1) DB Adder deck &<br>(2) CA7 & (1) CAL7 Aux |


### Auxiliary contact block adders

| Top mounted for BHD15 – BHD60 | Catalog number | List price |
|---|---|---|
| N.O. | CA7-10 | **$ 10** |
| N.C. | CA7-01 | **10** |
| N.O. Low energy | CA7-10G | **20** |
| Side mounted for BHD60 only | | |
| 1 N.O. & 1 N.C. | CAL7-11 | **20** |

# Drive contactors
## Type EHDB
## 75 to 960 Amps



EHDB280C-1L



EHDB280M-1L



EHDB520C2P-1L

### 2 & 3 pole — 600 volt N.O. ratings with 300 volt N.C. dynamic braking rating①

| Thermal amp rating 600 volts | Maximum amp rating N.C. contact | | Auxiliary contacts included | | 2 pole (2 N.O.) | | 3 pole (2 N.O. & 1 N.C.) | |
|---|---|---|---|---|---|---|---|---|
| | Make 300 VDC | Break 160 VDC | N.O. | N.C. | Catalog number | List price | Catalog number | List price |
| 130 | 260 | 171 | 1 | 1 | EHDB130C2P-1L | **$ 450** | EHDB130C-1L | **$ 575** |
| 220 | 450 | 285 | 1 | 1 | EHDB220C2P-1L | **465** | EHDB220C-1L | **665** |
| 280 | 565 | 363 | 1 | 1 | EHDB280C2P-1L | **630** | EHDB280C-1L | **860** |
| 380 | 728 | 472 | 1 | 1 | EHDB360C2P-1L | **1300** | EHDB360C-1L | **1880** |
| 520 | 1040 | 680 | 1 | 1 | EHDB520C2P-1L | **1500** | EHDB520C-1L | **2250** |
| 650 | 1300 | 850 | 1 | 1 | EHDB650C2P-1L | **2635** | EHDB650C-1L | **3100** |
| 800 | 1600 | 1050 | 1 | 1 | EHDB800C2P-1L | **3230** | EHDB800C-1L | **3800** |
| 950 | 1920 | 1250 | 1 | 1 | EHDB960C2P-1L | **4080** | EHDB960C-1L | **4800** |

### Description
EHDB drive contactors are specifically designed for use with solid state D.C. adjustable speed drive systems. In drive applications, the contactor is not required to make or break the load during normal operation. The N.C. contact is used for dynamic braking applications.

### Coil voltage selection
All catalog numbers include a 120V coil. To select other coil voltages, substitute the code from the coil voltage selection chart for the first digit after the dash in the catalog number.

### Coil voltage selection chart

| | Volts | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 24 | 48 | 110 | 120 | 125 | 208 | 220 | 240 | 277 | 380 | 415 | 440 | 480 | 500 | 600 |
| 60 | F | G | | 1 | | B | 2 | 2 | C | | | 3 | 4 | | 6 |
| 50 | N | | 1 | | | | J | | | 3 | 4 | | | 6 | |
| DC | Y | W | P | | Q | | R | | | | | | | | |

NOTE: DC coils are available for BHD60 contactors only.

### DC operated contactors
EHDB130 – EHDB960


DC and AC operated contactors have the same magnet structure except the DC coil includes a resistor and a normally closed late break auxiliary interlock. To order, substitute the code from the coil voltage selection chart and refer to the DC magnet coils chart for the price adder.

DC operated contactors are supplied with 2 N.O. & 1 N.C. auxiliary contacts. One additional 1 N.O. & 1 N.C. auxiliary contact block can be mounted on the left side of the contactor.

### DC magnet coils (per contactor)

| Contactor size | List price |
|---|---|
| EHDB130 | **$ 140** |
| EHDB220 – EHDB280 | **170** |
| EHDB360 | **190** |
| EHDB520 | **240** |
| EHDB650 – EHDB960 | **330** |

# Drive contactors
## Replacement parts



EHDBRC280-1

### Coils


| Contactor size | | Catalog number | AC coils list price | DC coils list price |
|---|---|---|---|---|
| | BHD15 | BHDRC15-★ | $ 12 | — |
| | BHD30 | BHDRC30-★ | 20 | — |
| | BHD60 | BHDRC60-★ | 38 | $ 76 |
| | EHDB75, EHDB110 | EHDBRC110-★ | 40 | 60 |
| | EHDB130 | EHDBRC130-★ | 80 | 100 |
| | EHD220, EHD280 | EHDRC280-★ | 100 | 130 |
| | EHD350 | EHDRC360-★ | 120 | 160 |
| Withdrawable type | EHDB220, EHDB280 | EHDBRC280-★ | 100 | 130 |
| | EHDB360 | EHDBRC360-★ | 120 | 160 |
| | EHDB520, EHDB650 | EHDBRC650-★ | 240 | 300 |
| | EHDB800, EHDB960 | EHDBRC960-★ | 290 | 350 |

EHDB coils can be used as replacement parts in EHD contactors.

### Coil voltage selection chart

| | Volts | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 24 | 48 | 110 | 120 | 125 | 208 | 220 | 240 | 277 | 380 | 415 | 440 | 480 | 500 | 600 |
| 60 | F | G | | 1 | | B | 2 | 2 | C | | | 3 | 4 | | 6 |
| 50 | N | | 1 | | | J | | | | 3 | 4 | | | 6 | |
| DC | Y | W | P | | Q | | R | | | | | | | | |

NOTE: For other voltages, consult factory. • 24VAC coils are not available for sizes EHDB520 – EHDB960. • 48VAC coils are not available for sizes EHDB520 – EHDB960. For these 24V and 48V applications, use an interposing control relay. • 12VDC coils are not available for EHDB520 – EHDB960.



EHDBAS280

### Arc shields

| Contactor size | | Catalog number | List price |
|---|---|---|---|
| 3 Pole | | | |
| | EHDB75 | EHDBAS075 | $ 72 |
| | EHDB110 | EHDBAS110 | 88 |
| | EHDB130 | EHDBAS130 | 115 |
| | EHDB220 | EHDBAS220 | 133 |
| | EHDB280 | EHDBAS280 | 155 |
| | EHDB360 | EHDBAS360 | 169 |
| | EHDB520 | EHDBAS520 | 203 |
| | EHDB650 | EHDBAS650 | 233 |
| | EHDB800 | EHDBAS800 | 247 |
| | EHDB960 | EHDBAS960 | 264 |
| 2 Pole | | | |
| | EHDB75 | EHDBAS075-2 | 67 |
| | EHDB110 | EHDBAS110-2 | 83 |
| | EHDB130 | EHDBAS130-2 | 110 |
| | EHDB220 | EHDBAS220-2 | 128 |
| | EHDB280 | EHDBAS280-2 | 147 |
| | EHDB360 | EHDBAS360-2 | 161 |
| | EHDB520 | EHDBAS520-2 | 195 |
| | EHDB650 | EHDBAS650-2 | 225 |
| | EHDB800 | EHDBAS800-2 | 238 |
| | EHDB960 | EHDBAS960-2 | 255 |

### Auxiliary contact blocks — EHDB75 to EHDB960


| Contactor sizes | Description | Terminal N.O. | Terminal N.C. | Catalog number | List price |
|---|---|---|---|---|---|
| EHDB75 to EHDB960 | Standard 1 N.O. & 1 N.C. | 13, 14 | 21, 22 | CAL16-11A | $ 44 |
| | Standard 1 N.O. & 1 N.C. | 43, 44 | 31, 32 | CAL16-11B | 44 |
| | Standard 1 N.O. & 1 N.C. | 53, 54 | 61, 62 | CAL16-11C | 44 |
| | Standard 1 N.O. & 1 N.C. | 83, 84 | 71, 72 | CAL16-11D | 44 |
| | Late break 1 N.O. & 1 N.C. | 47, 48 | 35, 36 | CAL16-11E | 50 |
| **Type EN81** EHDB130 | Standard 1 N.O. & 1 N.C. (left side) | 13, 14 | 21, 22 | CAL16-11L | 80 |
| | Standard 1 N.O. & 1 N.C. (right side) | 43, 44 | 31, 32 | CAL16-11M | |
| **Type EN81** EHDB220 to EHDB280 | Standard 1 N.O. & 1 N.C. (left side) | 13, 14 | 21, 22 | CAL16-11N | 80 |
| | Standard 1 N.O. & 1 N.C. (right side) | 43, 44 | 31, 32 | CAL16-11P | |

EHDB75 to EHDB960 contactors are provided with a 1 N.O. & 1 N.C. auxiliary contact block mounted on each contactor. One additional 1 N.O. & 1 N.C. auxiliary contact block can be mounted on the left side of the contactor and two additional 1 N.O. & 1 N.C. contact blocks can be mounted on the right side.

# Drive contactors
## Replacement parts



EHDBCK280-NC



EHDBTK520
Kit includes lugs and mounting hardware

### Contact kits

| Contactor size | Catalog number | List price |
|---|---|---|
| 2 Pole | | |
| BHD60 | BHDCK060-2 | $ 95 |
| EHDB75 | EHDBCK075-2 | 100 |
| EHDB110 | EHDBCK110-2 | 140 |
| EHDB130 | EHDBCK130-2 | 155 |
| EHDB220 | EHDBCK220-2 | 200 |
| EHDB280 | EHDBCK280-2 | 240 |
| EHDB360 | EHDBCK360-2 | 465 |
| EHDB520 | EHDBCK520-2 | 684 |
| EHDB650 | EHDBCK650-2 | 912 |
| EHDB800 | EHDBCK800-2 | 1125 |
| EHDB960 | EHDBCK960-2 | 1410 |

### N.C. DB Kit only

| Contactor size | Contact rating | Auxiliary interlocks | Catalog number | List price |
|---|---|---|---|---|
| BHD15 | 300V | 1 N.O. | CA7D-NC15 | $ 30 |
| BHD30 | 300V | 1 N.O. | CA7D-NC30 | 40 |
| BHD60 | 150V | 1 N.O. | CA7D-NC60A | 50 |
| BHD60 | 300V | 1 N.O. | CA7D-NC60B | 50 |
| EHDB75 | 300V | — | EHDBCK075-NC | 75 |
| EHDB110 | 300V | — | EHDBCK110-NC | 75 |
| EHDB130 | 300V | — | EHDBCK130-NC | 95 |
| EHDB220 | 300V | — | EHDBCK220-NC | 110 |
| EHDB280 | 300V | — | EHDBCK280-NC | 110 |
| EHDB360 | 300V | — | EHDBCK360-NC | 210 |
| EHDB520 | 300V | — | EHDBCK520-NC | 342 |
| EHDB650 | 300V | — | EHDBCK650-NC | 342 |
| EHDB800 | 300V | — | EHDBCK800-NC | 460 |
| EHDB960 | 300V | — | EHDBCK960-NC | 460 |

### Terminal kits

| Contactor size | Wire size | Catalog number | List price |
|---|---|---|---|
| 3 Pole | | | |
| EHDB75 | 10 – 2/0 | EHDBTK075 | $ 12 |
| EHDB110 | 10 – 2/0 | EHDBTK110 | 12 |
| EHDB130 | 8 – 3/0 | EHDBTK130 | 25 |
| EHDB220 | 8 – 3/0 | EHDBTK220 | 25 |
| EHDB280 | 6 – 250 kcmils | EHDBTK280 | 30 |
| EHDB360 | 4 – 500 kcmils | EHDBTK360 | 50 |
| EHDB520 | (2) 4 – 500 kcmils | EHDBTK520 | 60 |
| EHDB650 | (2) 4 – 500 kcmils | EHDBTK650 | 75 |
| EHDB800 | 2 – 600 kcmils | EHDBTK800 | 100 |
| EHDB960 | 2 – 600 kcmils | EHDBTK960 | 225 |
| 2 Pole | | | |
| EHDB75 | 10 – 2/0 | EHDBTK075 | 8 |
| EHDB110 | 10 – 2/0 | EHDBTK110 | 8 |
| EHDB130 | 8 – 3/0 | EHDBTK130 | 17 |
| EHDB220 | 8 – 3/0 | EHDBTK220 | 17 |
| EHDB280 | 6 – 250 kcmils | EHDBTK280 | 20 |
| EHDB360 | 4 – 500 kcmils | EHDBTK360 | 35 |
| EHDB520 | (2) 4 – 500 kcmils | EHDBTK520 | 40 |
| EHDB650 | (2) 4 – 500 kcmils | EHDBTK650 | 50 |
| EHDB800 | 2 – 600 kcmils | EHDBTK800 | 70 |
| EHDB960 | 2 – 600 kcmils | EHDBTK960 | 150 |

# Technical data for drive contactors
## Type BHD


| Contactor model number | | BHD15C3P-1 | BHD30C3P-1 | BHD60C3P-1 | BHD15C-1 | BHD30C-1 | BHD60C-1 |
|---|---|---|---|---|---|---|---|
| **Main poles** | | | | | | | |
| N.O. Poles, Amps @ 500VDC | A | 15 | 30 | 60 | 15 | 30 | 60 |
| 240 VDC | HP | 3 | 7.5 | 15 | 3 | 7.5 | 15 |
| 500 VDC | HP | 7.5 | 15 | 30 | 7.5 | 15 | 30 |
| **Center pole** | | | | | | | |
| N.C. Pole, 160V Make | Max. Amps | 24 | 45 | 90 | — | — | — |
| N.C. Pole, 160V Break | Max. Amps | 14 | 28 | 55 | — | — | — |
| N.C. Pole, 300V Make | Max. Amps | — | — | — | 24 | 45 | 90 |
| N.C. Pole, 300V Break | Max. Amps | — | — | — | 14 | 28 | 55 |
| **DC rating** | | | | | | | |
| Maximum thermal current | A | 15 | 30 | 60 | 15 | 30 | 60 |
| Peak interrupting current | A | 22.5 | 45 | 90 | 22.5 | 45 | 90 |
| **Connectable wire size** | | | | | | | |
| Main poles with lugs | | 18 – 10 | 14 – 10 | 8 – 1 | 18 – 10 | 14 – 10 | 8 – 1 |
| Auxiliary contacts, min/max | | 18 – 10 | 18 – 10 | 18 – 10 | 18 – 10 | 18 – 10 | 18 – 10 |
| **Main contacts (contactor life)** | | | | | | | |
| Mechanical endurance @ no load | mil. | 5 | 5 | 5 | 5 | 5 | 5 |
| Electrical endurance, main poles | mil. | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 |
| Frequency of operations | per hour | 600 | 600 | 600 | 600 | 600 | 600 |
| **Auxiliary contacts** | | | | | | | |
| NEMA rating | | A600 | A600 | A600 | A600 | A600 | A600 |
| AC rated voltage | V | 600 | 600 | 600 | 600 | 600 | 600 |
| AC thermal rated current | A | 10 | 10 | 10 | 10 | 10 | 10 |
| AC maximum making | VA | 7200 | 7200 | 7200 | 7200 | 7200 | 7200 |
| AC maximum breaking | VA | 720 | 720 | 720 | 720 | 720 | 720 |
| NEMA rating | | P600 | P600 | P600 | P600 | P600 | P600 |
| DC rated voltage | V | 600 | 600 | 600 | 600 | 600 | 600 |
| DC thermal rated current | A | 5 | 5 | 5 | 5 | 5 | 5 |
| DC maximum make-break | A | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 |
| Min. breakdown AC RMS voltage between live parts and ground | V | 2200 | 2200 | 2200 | 2200 | 2200 | 2200 |
| Minimum permissable load, 17V | A | 0.005 | 0.005 | 0.005 | 0.005 | 0.005 | 0.005 |
| Max. wire size on terminals @ 2/term | | 10 AWG | 10 AWG | 10 AWG | 10 AWG | 10 AWG | 10 AWG |
| Max. operations per hour | | 600 | 600 | 600 | 600 | 600 | 600 |
| Min. expected mechanical life | mil. | 10 | 10 | 10 | 10 | 10 | 10 |
| Min. expected electrical life | mil. | 2 | 2 | 2 | 2 | 2 | 2 |
| **Coil operating data** | | | | | | | |
| AC power consumption | | | | | | | |
| Inrush 60 Hz | VA | 80 | 100 | 200 | 80 | 100 | 200 |
| Holding 60 Hz | VA | 10 | 11 | 20 | 10 | 11 | 20 |
| Holding 60 Hz | W | 2.4 | 3.3 | 5.5 | 2.4 | 3.3 | 5.5 |
| AC operating time (in milliseconds) | | | | | | | |
| Closing time | ms | 9 – 17 | 10 – 20 | 20 – 25 | 9 – 17 | 10 – 20 | 20 – 15 |
| Opening time | ms | 5 – 13 | 5 – 15 | 10 – 15 | 5 – 13 | 5 – 15 | 10 – 15 |
| **General data** | | | | | | | |
| Approximate weight | lbs | 0.8 | 1.2 | 2.4 | 0.8 | 1.2 | 2.4 |
| **Temperature limits** | | | | | | | |
| Maximum operating temperature | °C | 50 | 50 | 50 | 50 | 50 | 50 |
| Minimum operating temperature | °C | -25 | -25 | -25 | -25 | -25 | -25 |
| Minimum storage temperature | °C | -40 | -40 | -40 | -40 | -40 | -40 |
| Maximum storage temperature | °C | 70 | 70 | 70 | 70 | 70 | 70 |
| Min. breakdown AC RMS voltage | V | 2200 | 2200 | 2200 | 2200 | 2200 | 2200 |
| **Operating altitude** | | | | | | | |
| Maximum operating altitude | feet | 10,000 | 10,000 | 10,000 | 10,000 | 10,000 | 10,000- |

# Technical data for drive contactors
## Type EHDB


| Contactor model number | | EHDB130 | EHDB220 | EHDB280 | EHDB360 | EHDB520 | EHDB650 | EHDB800 | EHDB960 |
|---|---|---|---|---|---|---|---|---|---|
| N.O. poles, Amps | 600 VDC | 150 | 220 | 280 | 360 | 520 | 650 | 800 | 960 |
| N.C. pole, 600V Make | Max. amps | 260 | 456 | 565 | 728 | 1040 | 1300 | 1600 | 1920 |
| N.C. pole, 300V Break | Max. amps | 171 | 285 | 363 | 472 | 680 | 850 | 1050 | 1250 |
| **Connectable wire size** | | | | | | | | | |
| Main poles with lugs | | 8 – 30 | 8 – 30 | 5 – 250 kcmils | 4 – 500 kcmils | (2) 4 – 500 kcmils | (2) 4 – 500 kcmils | (3) 2 – 600 kcmils | (3) 2 – 600 kcmils |
| Auxiliary contacts | min./max. | 16/10 | 16/10 | 16/10 | 16/10 | 16/10 | 16/10 | 16/10 | 16/10 |
| **DC rating information** | **N.O. Poles** | | | | | | | | |
| Peak interrupting current | A | 195 | 330 | 420 | 540 | 780 | 975 | 1200 | 1440 |
| Maximum thermal current | A | 130 | 220 | 280 | 360 | 520 | 650 | 800 | 960 |
| **Main contacts (contactor life)** | | | | | | | | | |
| Mechanical endurance @ no load | mil. | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| Electrical endurance | mil. | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 |
| Frequency of operations | per hour | 300 | 300 | 300 | 300 | 300 | 300 | 300 | 300 |
| **Auxiliary contacts** | | | | | | | | | |
| NEMA rating | | A600 | A600 | A600 | A600 | A600 | A600 | A600 | A600 |
| AC rated voltage | V | 600 | 600 | 600 | 600 | 600 | 600 | 600 | 600 |
| AC thermal rated current | A | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 |
| AC maximum making | VA | 7200 | 7200 | 7200 | 7200 | 7200 | 7200 | 7200 | 7200 |
| AC maximum breaking | VA | 720 | 720 | 720 | 720 | 720 | 720 | 720 | 720 |
| NEMA rating | | | | | | | | | |
| DC rated voltage | V | 600 | 600 | 600 | 600 | 600 | 600 | 600 | 600 |
| DC thermal rated current | A | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| DC maximum make-break | A | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 |
| Min. breakdown AC RMS voltage between live parts and ground | | 2200 | 2200 | 2200 | 2200 | 2200 | 2200 | 2200 | 2200 |
| Min. permissable load, 17V | A | 0.005 | 0.005 | 0.005 | 0.005 | 0.005 | 0.005 | 0.005 | 0.005 |
| Expected mechanical life | mil. | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 |
| Max. operations per hour | | 300 | 300 | 300 | 300 | 300 | 300 | 300 | 300 |
| **Coil operating data** | | | | | | | | | |
| AC power consumption | | | | | | | | | |
| Inrush 60 Hz | VA | 490 | 900 | 900 | 1200 | 2900 | 2900 | 400 | 4000 |
| Holding 60 Hz | VA | 35 | 52 | 52 | 65 | 105 | 105 | 140 | 140 |
| Holding 60 Hz | W | 11 | 18 | 18 | 22 | 44 | 44 | 60 | 60 |
| DC power consumption | | | | | | | | | |
| Inrush | W | 330 | 500 | 500 | 630 | 800 | 800 | 1100 | 1100 |
| Holding | W | 22 | 3.6 | 3.6 | 4 | 20 | 20 | 20 | 20 |
| AC operating time | | | | | | | | | |
| Closing time | ms | 20 – 30 | 20 – 30 | 20 – 30 | 20 – 30 | 30 – 50 | 30 – 50 | 30 – 50 | 30 – 50 |
| Opening time | ms | 7 – 15 | 7 – 15 | 7 – 15 | 7 – 15 | 10 – 20 | 10 – 20 | 10 – 20 | 10 – 20 |
| DC operating time | | | | | | | | | |
| Closing time | ms | 20 – 30 | 30 – 40 | 30 – 40 | 30 – 40 | 60 – 80 | 60 – 80 | 60 – 80 | 60 – 80 |
| Opening time | ms | 17 – 27 | 27 – 37 | 27 – 37 | 27 – 37 | 10 – 20 | 55 – 75 | 55 – 75 | 55 – 75 |
| **General data** | | | | | | | | | |
| Approximate weight | lbs | 5 | 9.2 | 9.2 | 13 | 27.3 | 27.3 | 37 | 38 |
| Temperature limits | | | | | | | | | |
| Maximum operating temperature | °C | 70 | 70 | 70 | 70 | 70 | 70 | 70 | 70 |
| Minimum operating temperature | °C | -40 | -40 | -40 | -40 | -40 | -40 | -40 | -40 |
| Minimum storage temperature | °C | -50 | -50 | -50 | -50 | -50 | -50 | -50 | -50 |
| Maximum storage temperature | °C | 70 | 70 | 70 | 70 | 70 | 70 | 70 | 70 |
| Min. Breakdown AC | RMS Voltage | 2200 | 2200 | 2200 | 2200 | 2200 | 2200 | 2200 | 2200 |
| **Operating altitude** | | | | | | | | | |
| Maximum operating altitude | feet | 10,000 | 10,000 | 10,000 | 10,000 | 10,000 | 10,000 | 10,000 | 10,000 |

# Approximate dimensions for drive contactors
## Type BHD, 3 pole


### BHD15

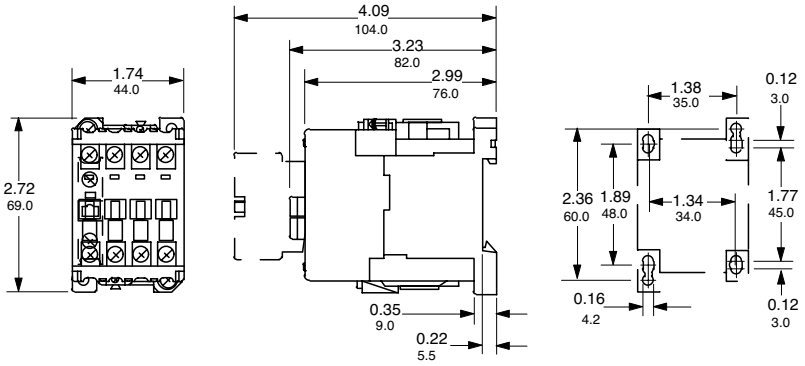


### BHD30

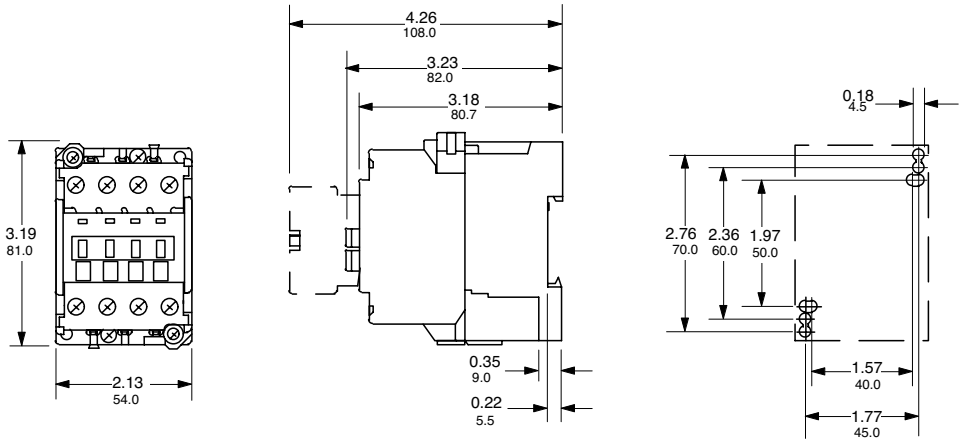



### BHD60

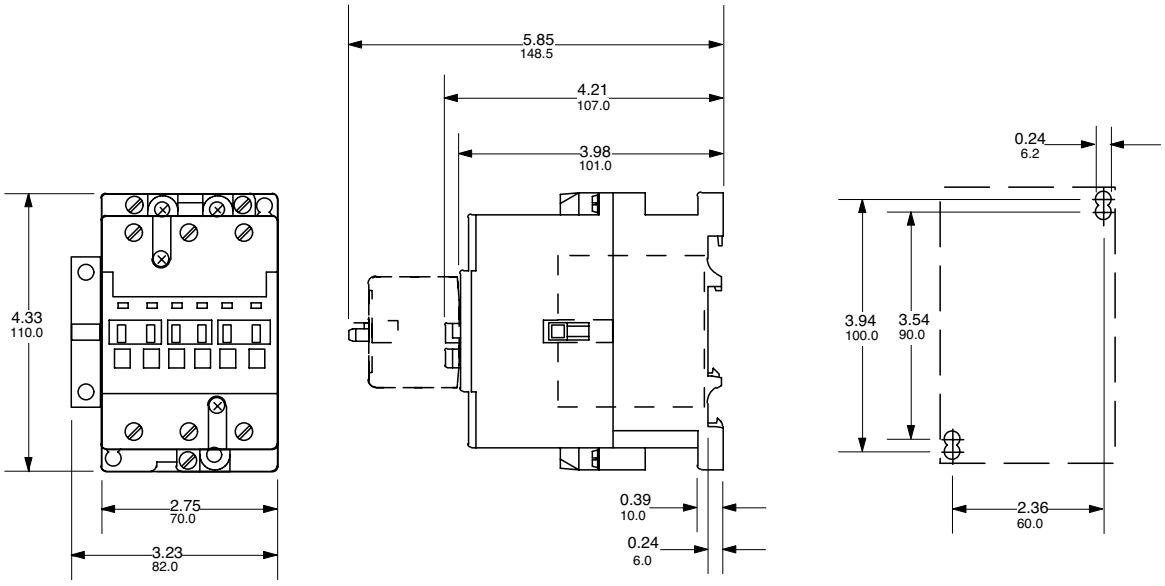


# Approximate dimensions for drive contactors
## Type BHD, 2 pole


### BHD15C2P

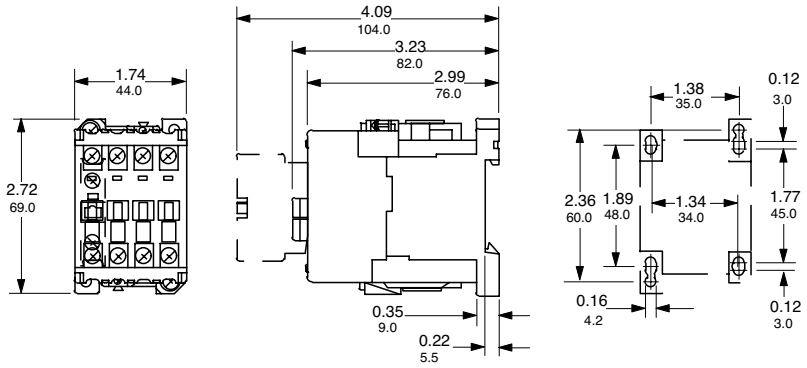


### BHD30C2P

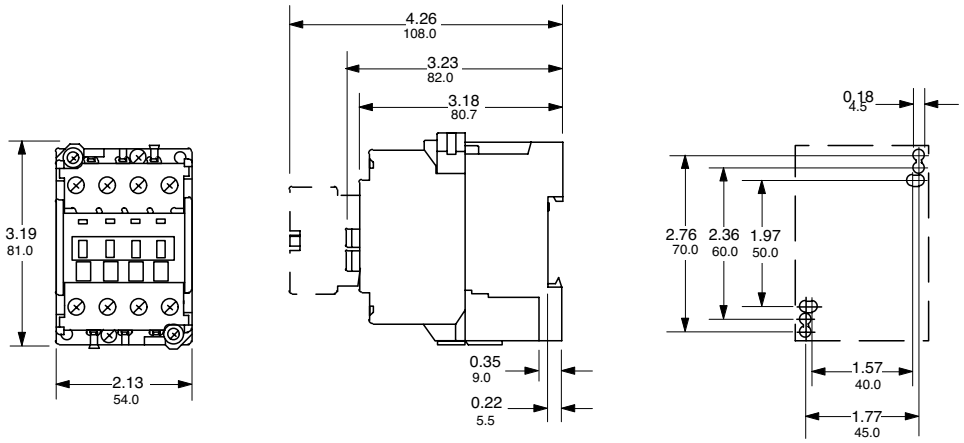



### BHD60C2P

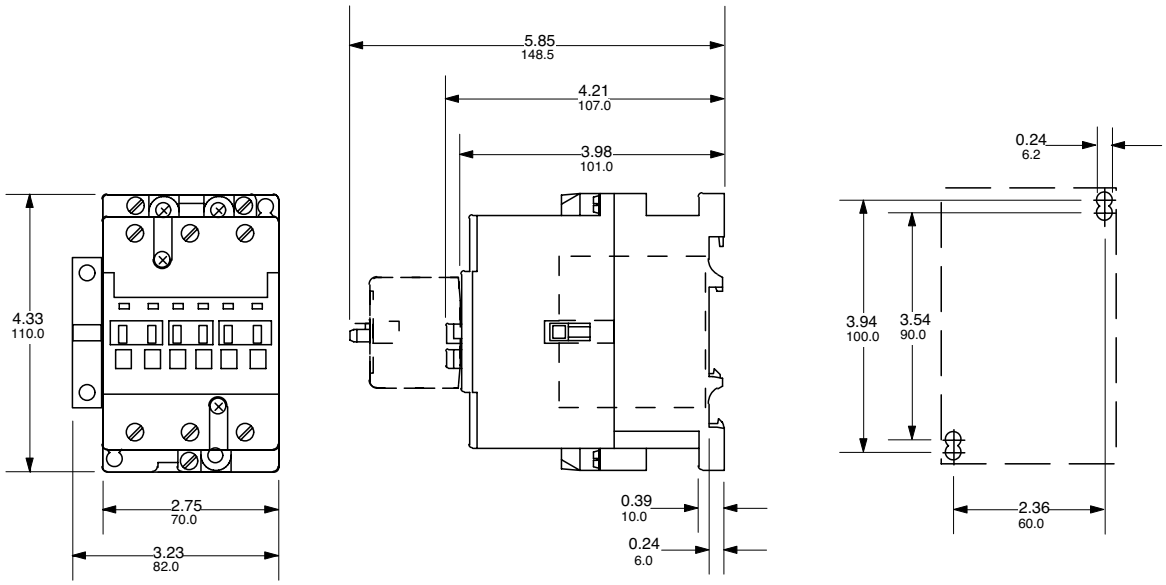

# Approximate dimensions for drive contactors
## Type EHDB 2 & 3 pole

### EHDB130 – EHDB960

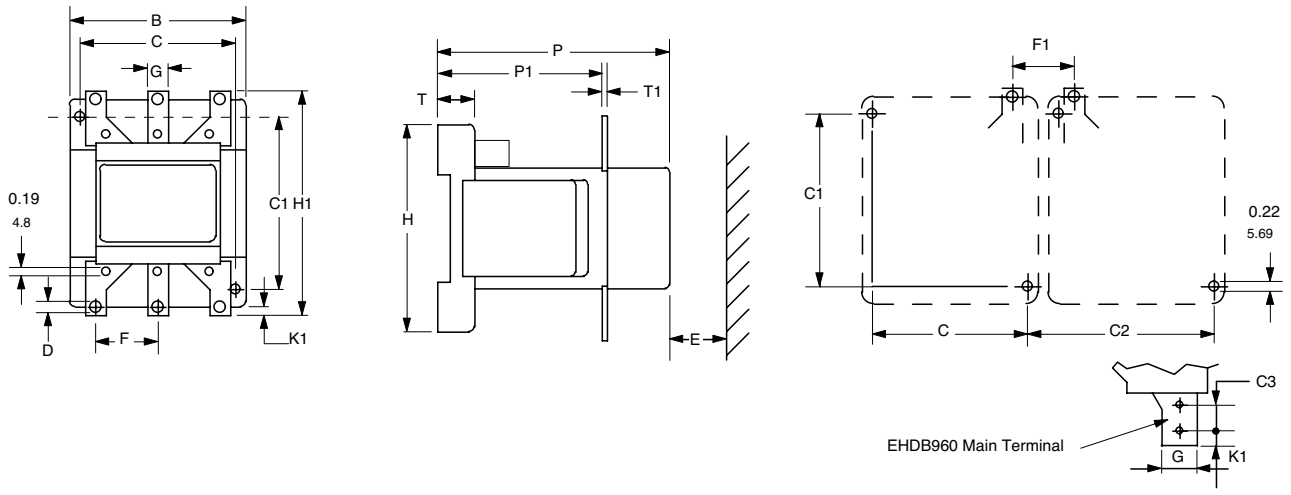



| DIM. | B | | | B2 | C | C1 | C2 | | | | E | D | F | G | H | H1 | K1 | P | P1 | T | T1 | C3 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 1, 2 | 3 | 4 | | | | ① | ≠ | ③ | √ | | | | | | | | | | | | |
| | Aux. contact block | | | | | | | | | | | | | | | | | | | | | |
| EHDB130in | 4.88 | 5.31 | 5.75 | 5.94 | 4.33 | 4.72 | 5.00 | 5.00 | 5.35 | 5.79 | 1.57 | 0.43 | 1.61 | 0.79 | 5.51 | 6.73 | 0.39 | 5.63 | 3.58 | 0.75 | 0.16 | — |
| mm | 124 | 135 | 146 | 151 | 110 | 120 | 127 | 127 | 136 | 147 | 40 | 11 | 41 | 20 | 140 | 171 | 10 | 143 | 91 | 19 | 4 | — |
| EHDB220in | 5.35 | 5.83 | 6.30 | 6.46 | 4.72 | 5.51 | 5.39 | 5.39 | 5.87 | 6.34 | 0.59 | 0.24 | 1.77 | 0.79 | 6.14 | 7.79 | 0.39 | 6.65 | 4.06 | 0.41 | 0.20 | — |
| mm | 136 | 148 | 160 | 164 | 120 | 140 | 137 | 137 | 149 | 161 | 15 | 6 | 45 | 20 | 156 | 198 | 10 | 169 | 103 | 10.5 | 5 | — |
| EHDB280in | 5.35 | 5.83 | 6.30 | 6.46 | 4.72 | 5.51 | 5.39 | 5.39 | 5.87 | 6.34 | 0.59 | 0.24 | 1.77 | 0.79 | 6.14 | 7.79 | 0.39 | 6.65 | 4.06 | 0.41 | 0.20 | — |
| mm | 136 | 148 | 160 | 164 | 120 | 140 | 137 | 137 | 149 | 161 | 15 | 6 | 45 | 20 | 156 | 198 | 10 | 169 | 103 | 10.5 | 5 | — |
| EHDB360in | 6.92 | 7.44 | 7.72 | 8.11 | 6.30 | 5.51 | 7.20 | 7.32 | 7.48 | 7.76 | 1.18 | 0.24 | 2.44 | 0.98 | 6.14 | 8.14 | 0.49 | 6.88 | 4.21 | 0.7 ⑤ | 0.20 | — |
| mm | 176 | 189 | 196 | 206 | 160 | 140 | 183 | 186 | 190 | 197 | 30 | 6 | 62 | 25 | 156 | 207 | 12.5 | 175 | 107 | 19 ⑤ | 5 | — |
| EHDB520in | 7.80 | 8.23 | 8.62 | 8.90 | 6.69 | 7.87 | 7.91 | 7.91 | 8.19 | 8.54 | 1.57 | 0.24 | 2.64 | 0.98 | 8.78 | 10.71 | 0.49 | 8.90 | 5.51 | 0.9 ⑤ | 0.24 | — |
| mm | 198 | 209 | 219 | 226 | 170 | 200 | 201 | 201 | 208 | 217 | 40 | 6 | 67 | 25 | 223 | 272 | 12.5 | 226 | 140 | 23 ⑤ | 6 | — |
| EHDB650in | 7.80 | 8.23 | 8.62 | 8.90 | 6.69 | 7.87 | 7.91 | 7.91 | 8.19 | 8.54 | 1.57 | 0.24 | 2.64 | 0.98 | 8.78 | 10.71 | 0.49 | 8.90 | 5.51 | 0.9 ⑤ | 0.24 | — |
| mm | 198 | 209 | 219 | 226 | 170 | 200 | 201 | 201 | 208 | 217 | 40 | 6 | 67 | 25 | 223 | 272 | 12.5 | 226 | 140 | 23 ⑤ | 6 | — |
| EHDB800in | 9.61 | 9.96 | 10.31 | 10.63 | 8.66 | 7.87 | 9.69 | 9.690 | 10.00 | 10.35 | 1.57 | 0.24 | 3.23 | 1.57 | 8.78 | 11.57 | 0.79 | 8.90 | 5.51 | 0.9 ⑤ | 0.24 | — |
| mm | 244 | 253 | 262 | 270 | 220 | 200 | 246 | 246 | 254 | 263 | 40 | 6 | 82 | 40 | 223 | 294 | 20 | 226 | 140 | 23 ⑤ | 6 | — |
| EHDB960in | 9.61 | 9.96 | 10.31 | 10.63 | 8.66 | 7.87 | 9.69 | 9.690 | 10.00 | 10.35 | 1.57 | 0.24 | 3.23 | 1.57 | 8.78 | 11.57 | 0.79 | 8.90 | 5.51 | 0.9 ⑤ | 0.24 | 1.36 |
| mm | 244 | 253 | 262 | 270 | 220 | 200 | 246 | 246 | 254 | 263 | 40 | 6 | 82 | 40 | 223 | 294 | 20 | 226 | 140 | 23 ⑤ | 6 | 34.5 |

① Minimum dimension
≠ Makes distance F1 = F
③ Includes space for three auxiliary contact blocks between the contactors.
√ Includes space for four auxiliary contact blocks between the contactors.
⑤ Damping elements are included.
NOTE: Screw, nut and washer are included for terminal hardware.

# Drive contactors
## Mounting positions, Type BHD & EHDB

### Type BHD & EHDB

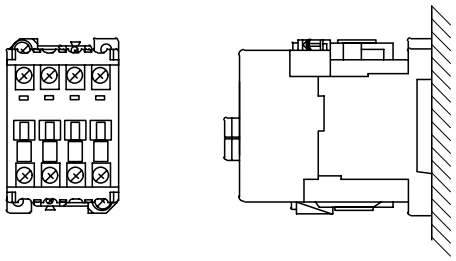

# Terms & conditions

These terms and conditions govern all sales and shipments of control equipment products (including parts and accessories).

ABB Control Inc. hereby gives notice of its objection to any different or additional terms and conditions except for such as may be expressly accepted by it in writing.

**Prices**
Prices are subject to change without notice. Prices will be the prices in effect at the time of shipment by ABB Control Inc. and include freight, prepaid and allowed to first destination in the continental United States. In the event of a price change, the effective date of the change will be the date shown on the new price discount sheets. However, where a price change is made by letter or telegram, the effective date will be given as part of the announcement.

**Taxes**
The price does not include any Federal, state or local property, license, privilege, sales, use, excise, gross receipts or other like taxes which may now or hereafter be applicable. Payment by ABB Control Inc. of any such taxes shall be for the account of purchaser.

**Standard Terms of Payment**
Standard terms of payment are according to the appropriate discount schedule (AC 5000 - AC 5002).

**Payment and Late Charges**
ABB Control Inc. may require full or partial payment in advance if, in its sole judgement, the financial condition of the purchaser, at any time prior to delivery, does not merit the terms of payment specified.

If shipments are delayed by the purchaser or by reason of any of the causes referred to in the paragraph entitled "Excusable Delay", payments shall become due from the date when ABB Control Inc. is prepared to make shipment. Products held for the purchaser as a result of such delay shall be at the risk and expense of the purchaser.

If the purchaser fails to pay any invoice when due, ABB Control Inc. may defer deliveries under this or any other contract with purchaser, except upon prior receipt of satisfactory security for or cash in payment of any such invoice. Failure on the part of purchaser to pay invoices when due shall at the option of ABB Control Inc. constitute a default under this contract.

A service charge, the lesser of the highest rate allowed by law or 11/2% per month, or fraction thereof, for a maximum charge of 18% per annum will be charged on all overdue accounts.

**Delivery**
Delivery of products shall be FOB point of shipment regardless of transportation costs being "allowed", "prepaid" or collect". Where the scheduled delivery of products and parts is delayed by the purchaser or by reason of any of the causes referred to in the paragraph entitled Excusable Delay, ABB Control Inc. may deliver such products by moving them to storage for the account of and at the risk of the purchaser. Shipping dates are approximate and are based upon prompt receipt of all necessary information from purchaser. ABB Control Inc. reserves the right to make delivery in installments.

**Purchaser Pick-up**
No allowance will be made in lieu of transportation charges if the purchaser accepts shipment at the factory, warehouse or freight station. Transportation charges will not be deducted from the purchase price.

**Origin, Method of Shipment and Routing**
ABB Control Inc. shall determine the point of origin of shipment, the method of transportation and the routing of shipment. Costs for shipment by means requested by purchaser different from ABB Control Inc.'s standard means of shipment are invoiced to the purchaser as a separate charge.

Freight charges will be added to the price of any order under $100.

**Excusable Delay**
ABB Control Inc. shall not be liable for loss, damage, detention or delay, nor be deemed to be in default from causes beyond its reasonable control, including without limitation, fire, flood, strike or other labor difficulty, act or omission of any governmental authority or of the purchaser, insurrection or riot, embargo, delays or shortage in transportation or inability to obtain necessary labor, materials or manufacturing facilities from usual sources.

In the event of delay in performance due to any such cause, the date of delivery will be postponed by such length of time as may be reasonably necessary to compensate for the delay.

**Warranty**
ABB Control Inc. warrants that on date of shipment to purchaser, the goods will be the kind and quality described herein, merchantable and free of defects in workmanship and material.

If within one year from date of initial operation, but not more than eighteen months from date of shipment, should any failure to conform with this warranty appear within such time, ABB Control Inc. shall, if given prompt notice by purchaser, correct such nonconformity, at its option, either by repair or replacement F.O.B. repair facility or by refund of the purchase price of the nonconforming product or part. Return of products to ABB Control Inc. pursuant to this paragraph shall be at purchaser's risk and expense. The foregoing warranty is exclusive and in lieu of all other warranties of quality, expressed or implied, and all other warranties, including any warranty of merchantability or fitness for a particular purpose are hereby disclaimed.

Correction of nonconformities in the manner and for the period of time provided above shall be purchaser's exclusive remedy and shall constitute fulfillment of all liabilities of ABB Control Inc. whether in warranty, strict liability, contract, negligence, tort or otherwise with respect to any nonconformance or defect in the product.

The foregoing warranty shall not apply to any product which has been: a) improperly repaired or altered, b) subjected to misuse, misapplication, negligence or accident, c) used in a manner contrary to manufacturer's directions.

**Limitation of Liability**
ABB Control Inc.'s liability to purchaser on any claim in connection with the product shall not exceed the purchase price of the product which gives rise to the claim.

IN NO EVENT SHALL ABB CONTROL INC. BE LIABLE FOR SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES whether in warranty, contract, strict liability, tort, negligence or otherwise including but not limited to loss of profits or revenue, loss of use of the product or any associated product, cost of capital, cost of substitute products, facilities or services, downtime costs or claims of customers of the purchaser for such or other damages.

Except as prohibited by law, all causes of action against ABB Control Inc. shall expire unless brought within one year of the time of accrual thereof. ABB CONTROL INC. NEITHER ASSUMES NOR AUTHORIZES ANYONE TO ASSUME FOR IT ANY OTHER OR FURTHER LIABILITY THAN AS SET OUT ABOVE.

**Patent Indemnity**
ABB Control Inc. will at its own expense defend any suit which may be brought against the Purchaser based on a claim that any apparatus or part furnished under contract constitutes an infringement of any United States letter patent (provided ABB Control Inc. is notified promptly of such suit and copies of all papers therein are delivered to ABB Control Inc.), and ABB Control Inc. agrees to pay all judgements and costs recovered in any such suit and to reimburse the Purchaser for costs of expenses incurred in the defense of any such claim or suit. In case said apparatus or any part is held to constitute infringement and the use of the apparatus or part is enjoined, ABB Control Inc. shall at its own expense, either procure for the Purchaser the right to continue using the apparatus or part or replace it with non-infringing apparatus; or modify it so it becomes non-infringing, or remove the apparatus and refund the purchase price and the transportation and installation cost thereof. The foregoing states the entire liability of ABB Control Inc. for patent infringement by apparatus or any part thereof.

**Shipping loss or damage**
In the event of shipping loss or damage: 1) Notification must be given to ABB Control Inc. within 72 hours of delivery; 2) Written notice of apparent loss or damage must be made on the carrier's delivery receipt; and 3) Concealed damage must be immediately reported to the delivering carrier with a request for inspection. Purchaser shall comply with the foregoing procedure whether or not ABB Control Inc. has the risk of loss at the point of loss or damage to the shipment.

**Title — risk of loss**
The products sold hereunder shall remain the property of ABB Control Inc. and shall remain personal property until fully paid for in cash, and purchaser agrees, if requested by ABB Control Inc. to execute a further security agreement covering the products sold, and to perform all acts which may be necessary to perfect and assure retention of title to such products by ABB Control Inc. Not withstanding any agreement with respect to delivery terms, risk of loss or damage shall pass to the purchaser and delivery shall be deemed to be complete upon delivery to a private or common carrier or upon moving into storage, whichever occurs first, at the point of shipment.

**Termination**
Any order or contract may be terminated by the purchaser only on written notice and upon payment of reasonable and proper termination charges, including without limitation, all costs identified to the order of contract incurred by ABB Control Inc. up to the date of notice of termination and all charges incurred by ABB Control Inc. in respect of the termination.

**Returns**
In no event will ABB Control Inc. be responsible for unauthorized return of products. Returns will be accepted only at ABB Control Inc.'s option and subject to terms specified by ABB Control Inc. Authorization and shipping instructions for return of products must be obtained from ABB Control Inc. prior to return shipment. Product must be returned with proper identification. When a purchaser requests authorization to return for his own reasons, the return is subject to a minimum restocking charge of 20% for standard inventoried product and for any transportation paid by ABB Control Inc., both out and ingoing. Returns will be accepted up to 60 days after invoice date. Goods returned for purchaser's reason are subject to inspection and must be in good working condition, as new, and in original cartons.

**Purchase orders**
Except as provided below, all orders must be in writing and show quantities and prices, complete description (including catalog numbers) of products requested and mutually agreed delivery dates.

Verbal orders received via telephone or otherwise must be confirmed within 5 days either by mail, telex or the equivalent. Verbal orders with a purchase price over $5,000 will not be processed until such written confirmation is received.

Unless otherwise agreed in writing, an addition to a previously entered order will be accepted only at then applicable prices, discount schedules, conditions of sale, etc.

**Special quotations**
Special quotations will automatically expire 30 days from issuance unless renewed in writing by ABB Control Inc.


**Assignment**
Any assignment of this contract, or any rights hereunder, without prior written consent of ABB Control Inc. by a duly authorized representative thereof shall be void.

**Partial invalidity**
If any provisions herein or portions thereof conflict with any statute or rule of law of the jurisdiction of applicable law or wherein the contract may be sought to be enforced, then such provisions or portions thereof shall be deemed void to the extent that they may so conflict, but without invalidating the remaining portions of such provisions or other provisions hereof.

**Remedies**
The remedies expressly provided for in the Conditions of Sale shall be in addition to any other remedies which ABB Control Inc. may have under the Uniform Commercial Code or other applicable law.

**Choice of law**
The construction and performance of this contract and the rights and remedies of the parties hereto shall be governed by the laws of the State of Texas.

# Worldwide approvals[1]

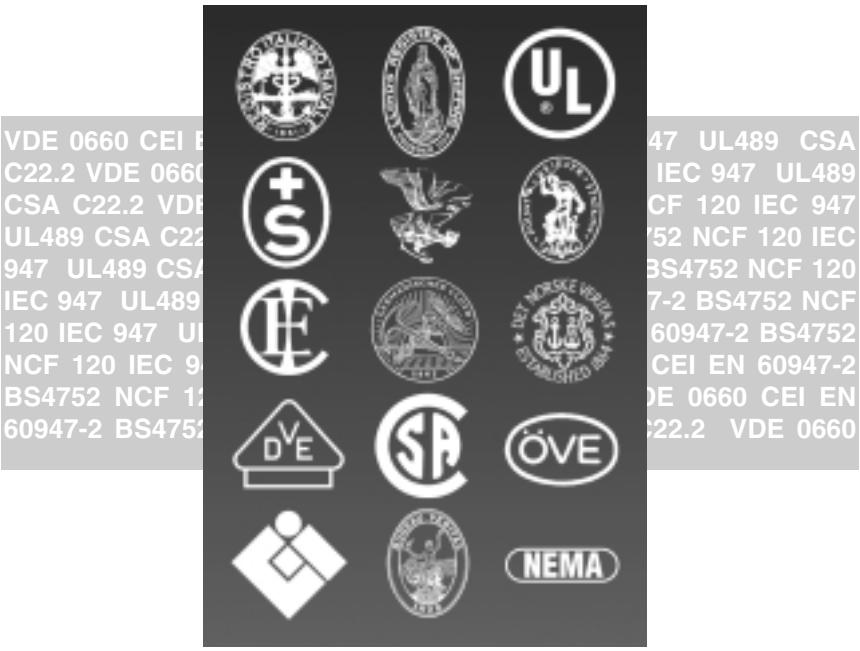


## The CE Mark

Within the European Union, EU, conformity of products and the proper application of the CE marking to machines and control equipment is necessary for marketing electrical equipment. The intent is to ensure compliance with all relevant EU Directives.

### ABB Low Voltage Apparatus

ABB is a global group serving customers in electric power generation, transmission and distribution, industrial building systems, and rail transportation. ABB Low Voltage Apparatus develops, produces and markets low voltage products such as disconnect switches, contactors, starters, pushbuttons, soft starters, arc guard systems, relays, mini-contactors, manual motor starters, Isomax MCCBs, and MCBs. With six manufacturing units within the European Union, we are ideally located to develop, manufacture and provide low voltage equipment to comply with the EU directive.

### Background

The guarantee of free trade of goods within the Community is the most important objective. This will eliminate trade restrictions that result from different technical regulations in each individual member country. Harmonization of existing European standards and regulations, is being accomplished and already partially realized. Based on this goal, a new concept for creating directives was formed in 1985 by the European Community (EC) Commission to produce directives with a wide range of applications which contain only the most basic safety requirements.

### The CE Mark

The CE mark is prescribed by law and assures the European free trade of goods. It is short for “Communauté Européen,” and is displayed on goods and/or packaging which acts as an external symbol for the inspection of products. It also illustrates the manufacturer’s responsibility to uphold the community’s directives.

### ABB´s commitment to the directives

ABB Low Voltage Apparatus producing companies will attach the CE mark in accordance with the product directives. Our products will conform as follows:

- Declarations of conformity for ABB products will be available when required by the relevant EU directives.
- Those products required to do so will bear CE marking as specified by the relevant EU directives and CE marking regulations.
- Necessary technical documentation will be on file and made available to authorized organizations upon written request.

[1] Approvals listed may not apply to products listed in this publication.



ABB Control Inc.
1206 Hatton Road
Wichita Falls, TX 76302
Tel. 888-385-1221
940-397-7000
Fax 940-397-7001

AC 1012
January, 2000

This information is provided by:




Gross Automation
1725 S. Johnson Rd.
New Berlin, WI 53146-1240
(877) 268-3700  Fax: (877) 268-9700