SUGGESTED MOUNTING HOLE PATTERN
FOR 4.5 X 15mm FUSE (2AG)
SCALE = 4:1

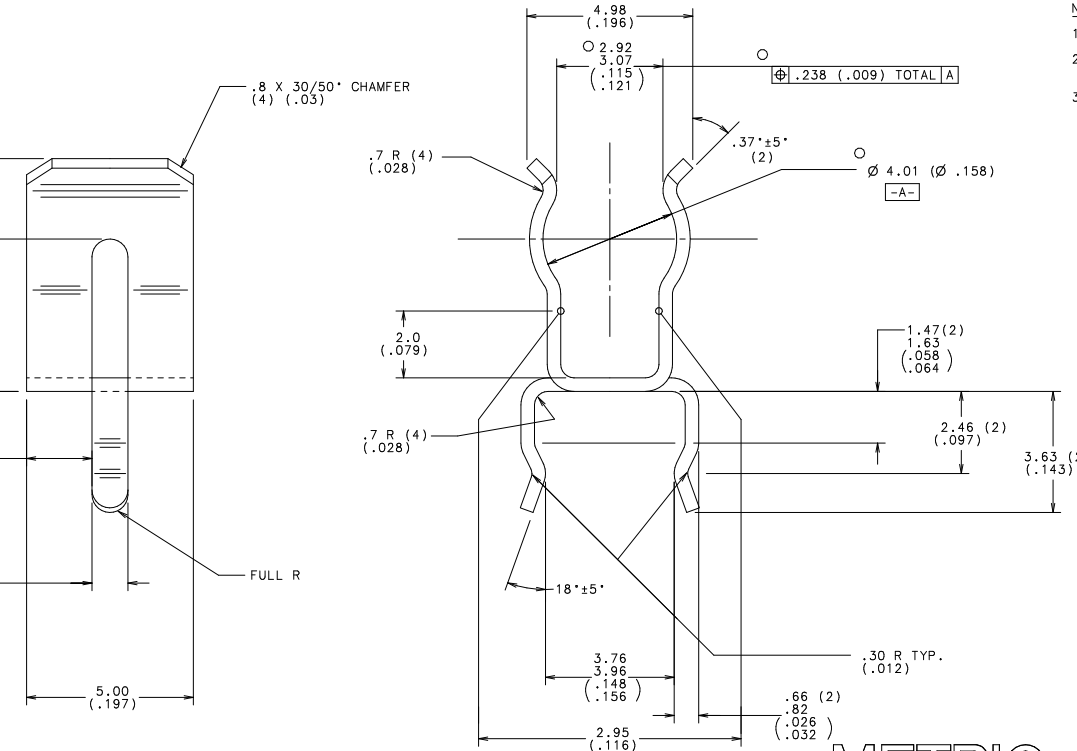

NOTES:

1. DECIMAL EQUIVALENT = (.XXX)
2. TOOLING MUST ALSO BE CAPABLE OF PRODUCING PART No. 01110501Z.
3. HEAT TREAT 600°F FOR 2 HOURS.

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M
2	010113	HIGH PURITY TIN	.015	LB
1	046184	BeCu .41(.016) THICK	.858	LB

BILL OF MATERIAL

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

O	DENOTES CRITICAL CHARACTERISTICS.
CPK	DENOTES CPK DIMENSIONS,-MINIMUM CPK VALUE
⟨ST⟩	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE, PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.
CP	DENOTES CP DIMENSIONS,-MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.

COPIES TO: 1 9 18 / 2 10 19 / 3 12 20 / 4 13 21 / 5 14 23 / 6 15 33 / 7 16 43 / 8 17 53

MATL SPEC

FINISH: TIN PLATE .0001-.0005 PER L/F SPEC. LF-001002-B

DRW	PJM	DATE 05/28/00	SCALE 10:1
CHK		DATE	SHEET DR
APPD		DATE	RAW STK WT

LBS/M

TOLERANCE UNLESS OTHERWISE SPECIFIED
TWO PLACE DEC ± .25 — FRACTION ±
THREE PLACE DEC ± .100 — ANGULAR ±1°

TITLE: 2.00 X 5 X 20mm P.C. MOUNT FUSE CLIP W/OUT EARS

METRIC
UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS

UNCONTROLLED DOCUMENT

Littelfuse | REVISION C | DRWG. NO. 01110512Z | FINAL