INLINE MIDI® FUSE HOLDER

RoHS

Specifications

Max. Voltage Rating:	32 VDC
Max. Fuse Rating:	200A
Operating Temperature Range:	-40°C to +125°C
Max. Wire Size:	20mm^2
M5 Torque Rating:	5Nm
Base/Cover Material:	UL 94V-0 glass-filled nylon
M5 Bolt Material:	Zinc-plated
M5 Nuts:	Zinc-plated with nylock inserts

Description

The Inline MIDI® fuseholder is designed for use with boltdown MIDI® style fuses. It may be installed direcly inline with the cables with no mounting required.

The Inline MIDI® fuse holder can be used with heat shrink tubing for applications requiring more splash resistance. The curved design of the cover aids in prevention of tube-splitting during application.

Dimensions

Dimensions in mm

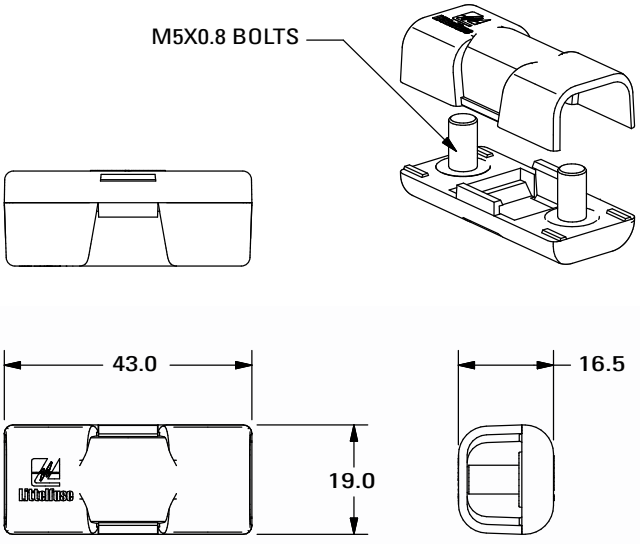

Ratings

Part Number	Description
04980921GXM5	Assembly with hardware and cover installed (Zinc-plated steel)
498921-1	Cover-only
498921-2	Base only with hardware installed (Zinc-plated steel)

© 2012 Littelfuse • Transportation Products Catalog