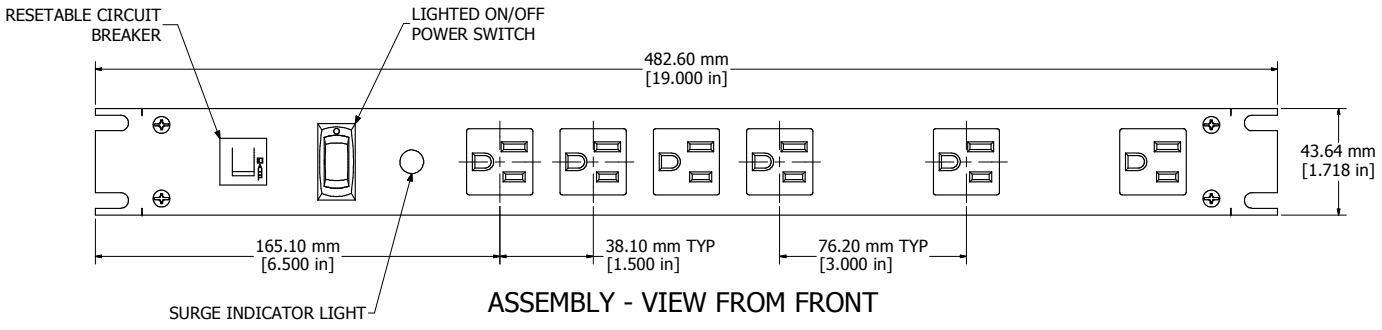

ASSEMBLY - VIEW FROM FRONT

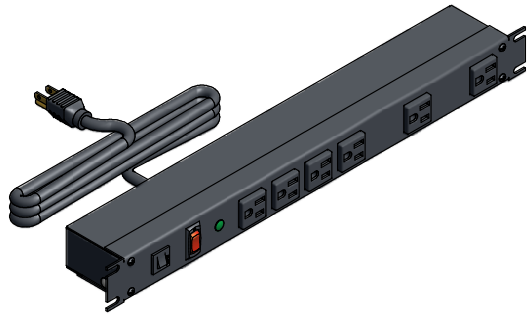

ISOMETRIC VIEW

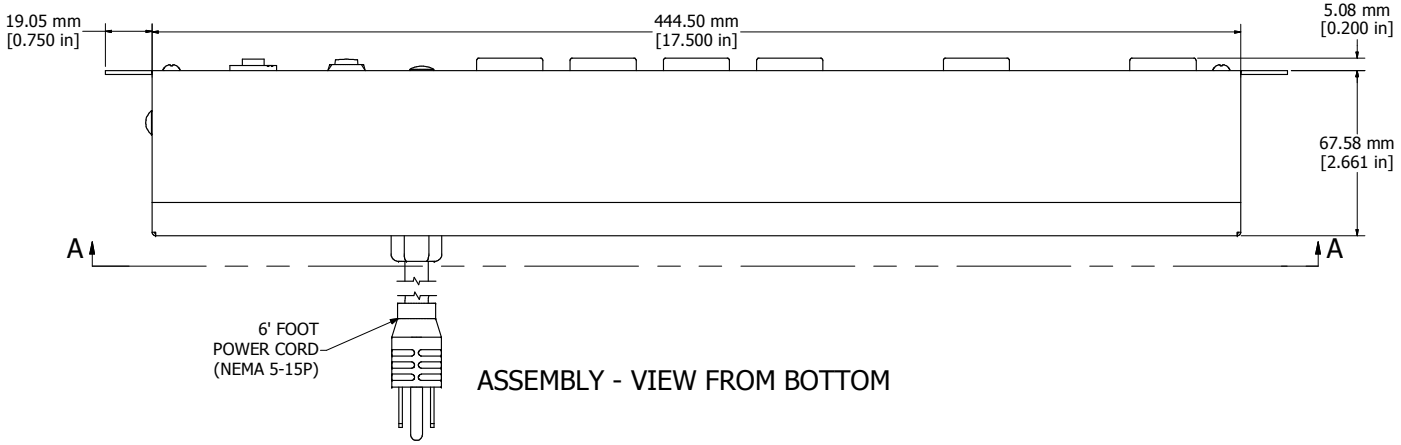

ASSEMBLY - VIEW FROM BOTTOM



ASSEMBLY - VIEW FROM SIDE

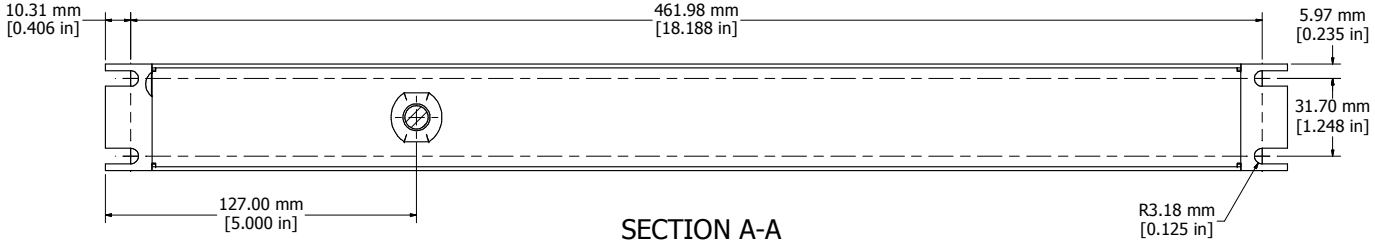

SECTION A-A

1582H6**S**
Finish - Front - Black Painted Steel
Back - Black Painted Steel
Rated - 125 VAC, 60 Hz, 15 Amps
Approvals - CSA Certified Standards C22.2 (No. 21-95, 42-99)
- CSA No. 8-M1986
Surge Specs - 780 Joules, 54000 Amps Transient Current
- Protection in 3 AC Modes (L-N, N-G, L-G)
Colours & Cord Length
1582H6A1SBK - Black w/ 6' Foot Power Cord (NEMA 5-15P)
1582H6A1S- ASA 61 Grey w/ 6' Foot Power Cord (NEMA 5-15P)
1582H6B1SBK - Black w/ 15' Foot Power Cord (NEMA 5-15P)
1582H6B1S- ASA 61 Grey w/ 15' Foot Power Cord (NEMA 5-15P)

HAMMOND MANUFACTURING™

1582H6**S**

www.hammondmfg.com