Top View of Assembly

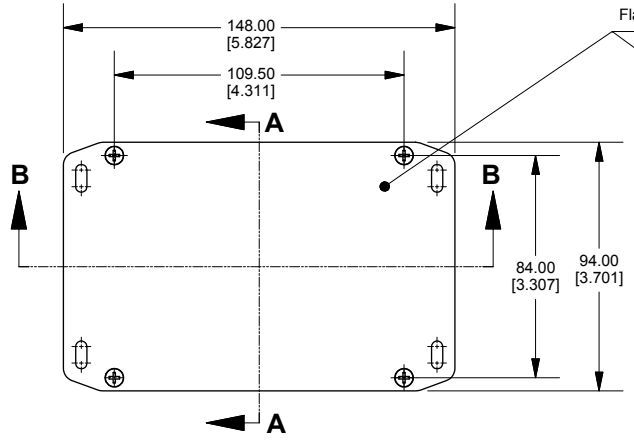

SECTION A-A
End View of Assembly

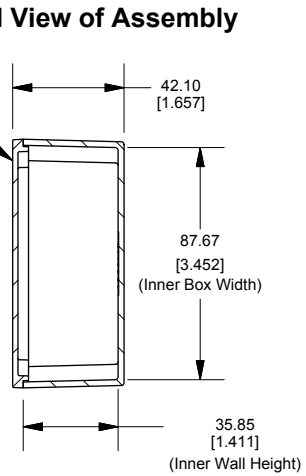

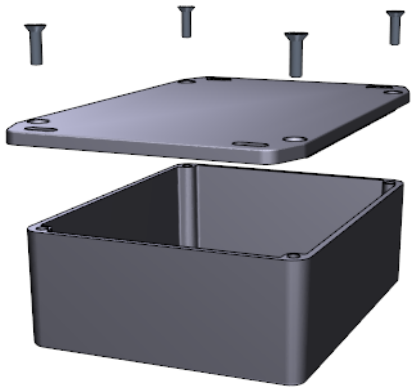

SECTION B-B
Side View of Assembly

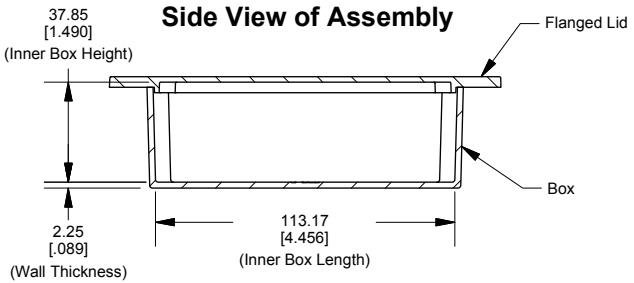

Top View Looking Inside Box

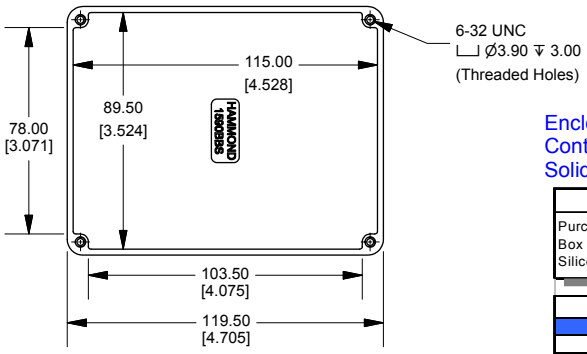

Flanged Lid

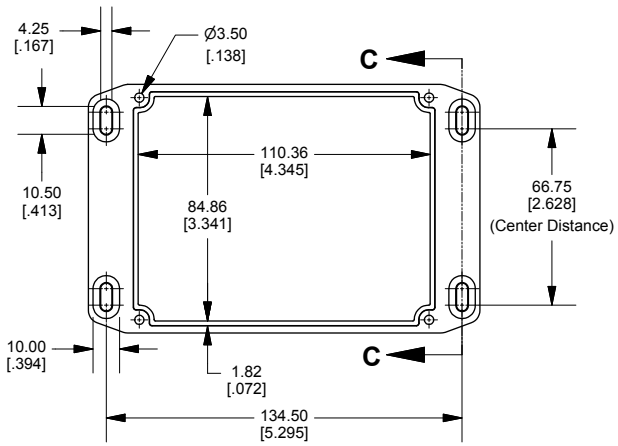

Side View of Slot
SECTION C-C

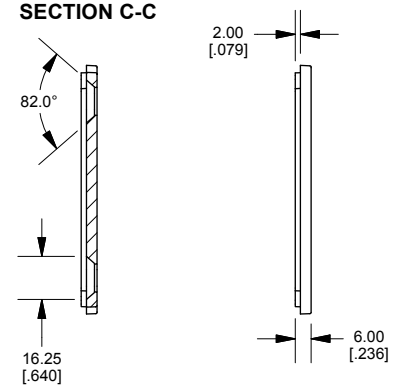

Enclosures can be Factory Modified (Milling, Drilling, Printing etc.)
Contact Factory mjm@hammondmfg.com for quotes
Solid models of this enclosure available in STEP or IGES.

NOTE
Purchased assembly includes box, lid and 4 cover screws. Box and lid are made from Diecast Aluminum Alloy (alloy type 380). Silicone gasket supplied with liquid resistant enclosures.

PART NUMBERS	
1590BBSFL Enclosure	
Unfinished	1590BBSFL
Grey Textured Polyester Powder Paint - RAL 7038	1590BBSFLGY
Black Textured Polyester Powder Paint - RAL 9011	1590BBSFLBK
1590BBSFL Liquid Resistant Enclosure (Silicone Gasket)	
Unfinished	1590WBBSFL
Black Textured Powder Paint	1590WBBSFLBK
ACCESSORIES	
Recommended Torque: 75 ozf.in / 55 cN.m	
Black Textured Cover Screws (Pkg 100) [6-32 x 1/2" SS Type 304]	1590WMS100BK
Unfinished Cover Screws (Pkg 100) [6-32 x 1/2" SS Type 304]	1590WMS100
Standard Cover Screws	
Unfinished Cover Screws (Pkg 100) [6-32 x 1/2" Nickel Plated Screws]	1590MS100
Black Textured Cover Screws (Pkg 100) [6-32 x 1/2" Nickel Plated Screws]	1590MS100BK

HAMMOND MANUFACTURING™

1590BBSFL

www.hammondmfg.com