Pomona®

Model 2484
Stacking Banana Plug Each End On Retractile (Coiled) Cord

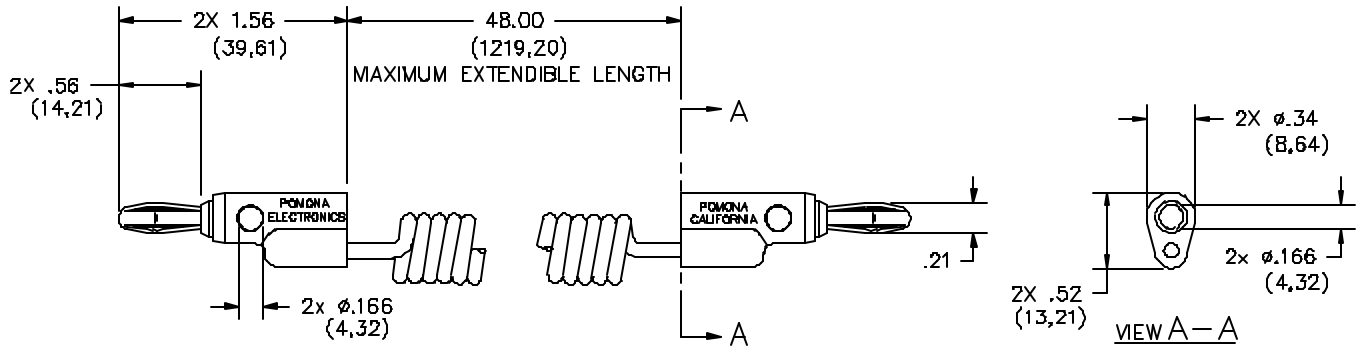

FEATURES:

- Cross stacking and vertical stacking on both ends.
- Mates to model #1581, 2854 or any standard banana jack.

MATERIALS:

Conn: Standard Stacking Banana Plug

Material: Spring - Beryllium Copper per QQ-C-533, Alloy 172, cond. HT.
Plug Body – Brass per QQ-B-626, Alloy 360, ½ Hard.
Finish: Nickel plated per QQ-N-290, Class 2, 200/300 microinches.
Insulation: Polypropylene molded to plug body and wire.
Color: Matches color of wire.
Retractile Cord: 20 AWG, stranding 42 x 36 t.c., PVC insulated, 3.71 (.146) O.D.
Color: See Ordering Information.

RATINGS:

Operating Temperature: +55ºC. (+131ºF.) Max.
Operating Voltage: Hand-held testing: 30 VAC/60VDC Max.
Hands free testing in controlled voltage environments: 270 VDC Max.
Current: 5 Amperes

ORDERING INFORMATION: Model 2484-*
*= Color, -0 Black, -2 Red
Ordering Example: 2484-2 Adapter Color is Red

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 888-403-3360
Technical Assistance: 800-241-2060

Pomona*ACCESS* **90557** (800) 444-6785 or (425) 446-6010
More drawings available at www.pomonaelectronics.com