6.3x32 mm / No. 354 Leadfree



Dimensions (mm)



Special Type, 440 V, F

Time-Current Characteristic
Quick Acting (F)

Standard
None

Approvals
cULus Recognized: File No. E 67006

Features

For high voltage applications
High breaking capacity
Agency approved
Pluggable into clips or shocksafe holders

Specifications

Packaging
002: Pack (100 pcs.)

Materials
Tube: Ceramic
End Caps: Nickel-plated brass

Operating Temperature
-25°C to +70°C (consider de-rating)

Climatic Category
-25°C/+70°C/21 days (EN 60068-1..3)

Stock Conditions
+10°C to +60°C
relative humidity ≤ 75% yearly average,
without dew, maximum value for 30 days-95%

Vibration Resistance
24 cycles at 15 min. each (EN 60068-2-6)
10 - 60Hz at 0.75mm amplitude
60 - 2000Hz at 10g acceleration

Marking
Ⓦ, F, Current Rating, 440V, Approvals

Unit Weight
3.0g (approx.)

Limits for Pre-arcing Time

Rated Current	1.5 x I_N	2.5 x I_N	4 x I_N	10 x I_N
630 mA ... 800 mA	> 1 h	< 30 min	8 ms ... 400 ms	<20 ms
1.00 A ... 10.00 A	> 1 h	< 30 min	20 ms ... 1 s	<50 ms

c UL us

RoHS

Permissible continuous operating current is ≤ 100 % at ambient temperature of 23 °C (73.4 °F).

Rated Current	Amp Code	Voltage Rating	Breaking Capacity	Voltage Drop 1.0 x I_N Ⓦ max. (mV)	Power Dissipation 1.5 x I_N Ⓦ max. (W)	Melting Integral 10 x I_N Ⓦ max. (A^2s)	Approvals cURus
630 mA	0630	440 V		600	1.1	0.12	
800 mA	0800	440 V		550	1.3	0.32	
1.00 A	1100	440 V		500	1.6	0.33	•
1.25 A	1125	440 V		470	2.0	1.8	•
1.60 A	1160	440 V		420	2.2	2.0	•
2.00 A	1200	440 V	1000 A / 440 V AC	320	2.4	5.3	•
2.50 A	1250	440 V	50-60 Hz	300	2.6	9.0	•
3.15 A [1]	1315	440 V	cos φ = 1.0	270	2.9	23	•
4.00 A [1]	1400	440 V		230	3.2	43	•
5.00 A [1]	1500	440 V		200	3.5	78	•
6.30 A [1]	1630	440 V		190	3.8	150	•
8.00 A [1]	1800	440 V		180	4.0	280	•
10.00 A [1]	2100	440 V		170	4.0	500	•

[1] Depending on the application and mounting, the fuse heating at max. ambient temperature in a closed fuseholder should be considered.

Note: 1.00 means the number one with two decimal places. 1,000 means the number one thousand.

Order Information

Qty.	Order-Number	Series	Amp Code	Packaging
		354		

Specifications are subject to change without notice

WICKMANN Ⓦ

In our continuing strategy to deliver unparalleled circuit protection solutions, technical expertise and application leadership, we proudly introduce the WICKMANN Group and its products to the Littelfuse portfolio.

6.3x32mm / No. **354**

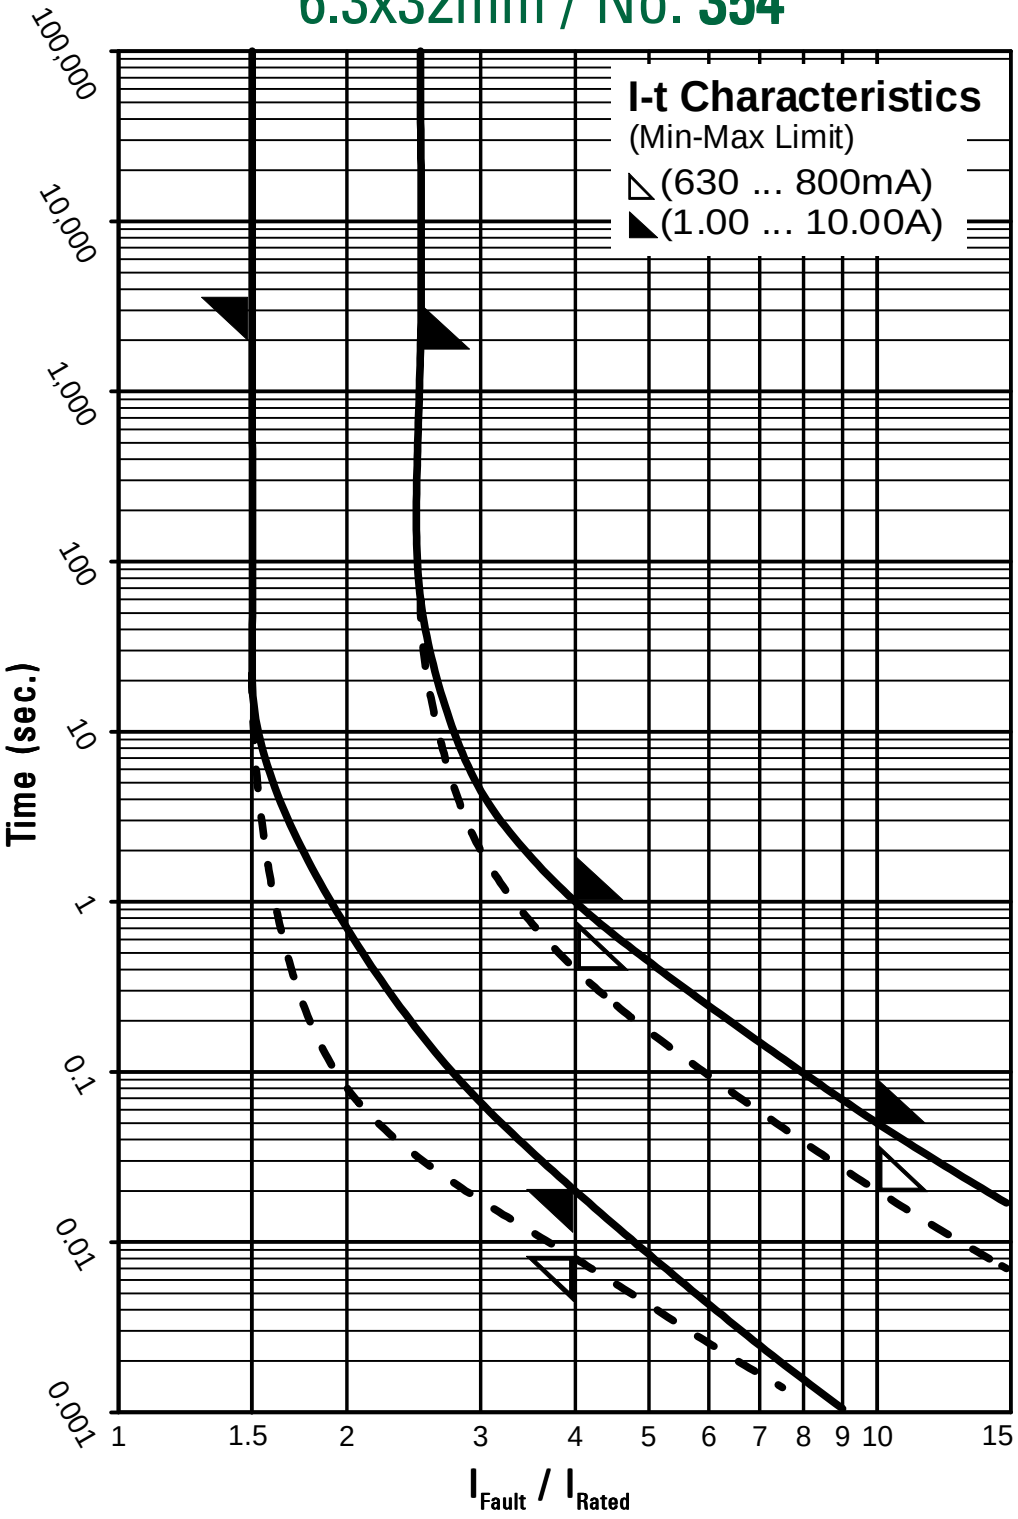

Contact Littelfuse for individual I-t curves

WICKMANN

In our continuing strategy to deliver unparalleled circuit protection solutions, technical expertise and application leadership, we proudly introduce the WICKMANN Group and its products to the Littelfuse portfolio.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Littelfuse:

35411000029 35406300029 35416300029 35411600029 35401600029 35412500029 35402500029 35408000029 35418000029 35413150029 35411250029 35415000029 35412000029 35414000029 35421000029 35401000029 35402000029