Pomona®

Model 3581
Triaxial 2 Lug Male, Twinaxial Cable

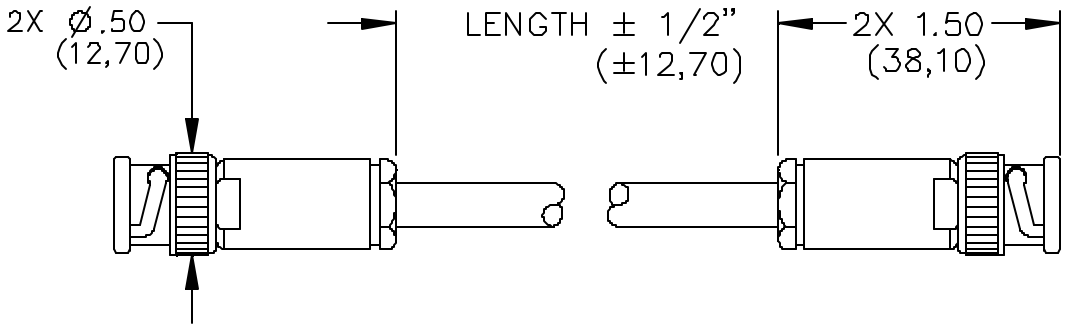

MATERIALS:

Conn. 1st End – Triaxial Cable Plug

Body and Fittings: Brass, Tarnish resistant plating

Intermediate and Center contacts: Gold Plated Brass

Cable: Belden 9272. Nominal Impedance: 78 Ohms. 2 conductor shielded, 20 AWG stranding 7 x 28 tinned copper.

Insulation: Polyethylene. Color: Blue

Conn. 2nd End - Triaxial Cable Plug

Body and Fittings: Brass, Tarnish resistant plating

Intermediate and Center Contacts: Gold Plated Brass

RATINGS:

Operating Temperature: +80°C. (+176°F.)

Operating Voltage: 500 VRMS

ORDERING INFORMATION: Model 3581-CC-XX

XX=Length in inches. Std. Lengths: 18" (45,72 cm), 24" (60,96 cm), 36" (91,44 cm), 48" (121,92 cm) & 60" (152,40 cm). Additional lengths can be quoted upon request.

Ordering Example: 3581-CC-36, Cable length will be 36" (9,44 mm) long.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies.

Made in USA

Sales: 800-490-2361 Fax: 888-403-3360
Technical Assistance: 800-241-2060

Pomona*ACCESS* **90818** (800) 444-6785 or (425) 446-6010
More drawings available at www.pomonaelectronics.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pomona:

3581-CC-18 3581-CC-36 3581-CC-24 3581-CC-60 3581-CC-48