Pomona®

Model 3606
Shielded Housing, Unpainted
Size "D"

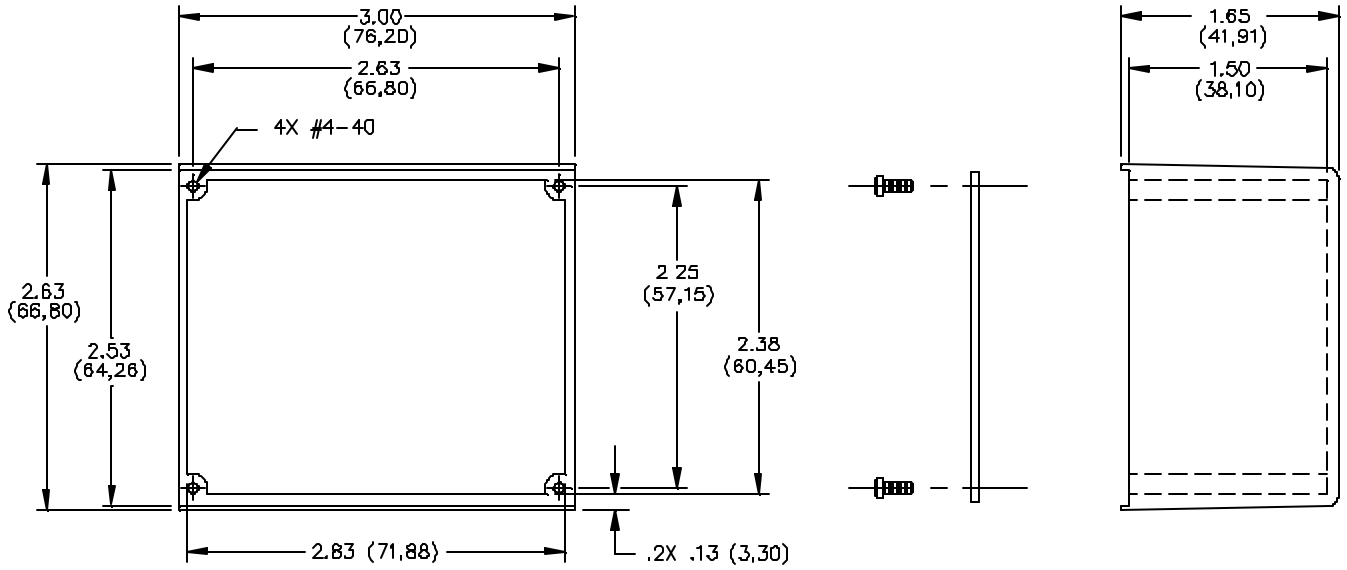

MATERIALS:

Screws: 4 ea. #4-40 x ¼" Pan Head.
Finish: Cadmium plated with clear irridite dip or blue zinc.
Cover: .063 thick aluminum 1100-H14
Finish: Clear anodize per MIL-A-8625
Shielded Housing: Die cast aluminum Alloy A380, or A384.
Finish: None

RATINGS:

Operating Temperature: +150°C. (+302°F.) Max.

ORDERING INFORMATION: Model 3606

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies.

Made in USA

Sales800-490-2361 Fax: 888-403-3360
Technical Assistance: 800-241-2060