Dial Stem Thermometers

Choice of Flat Surface or Penetration Stem Thermometer

For use in liquids, semi-solids and solids

Features:

- **Flat Surface Stem (Model 392052):**
  High temperature range: -58 to 572°F (-50 to 300°C)
- **Penetration Stem (Model 392050):**
  Temperature range: -58 to 302°F (-50 to 150°C)
- Basic Accuracy of 2°F or 1°C
- 0.1° resolution to 199.9; 1° over 200°
- ON/OFF switch saves battery life
- Auto power off after 1hr of non use
- Dimensions: 5" (130mm) stainless steel probe with 2" (54mm) dial
- Weight: 1oz (29g); 1.3oz (30g) with protective sheath
- Includes 1.5V button battery, and plastic protective sheath with pocket clip for model 392050





Stem thermometer ideal for measuring temperature in HVAC applications such as air ducts, vents, and heaters.

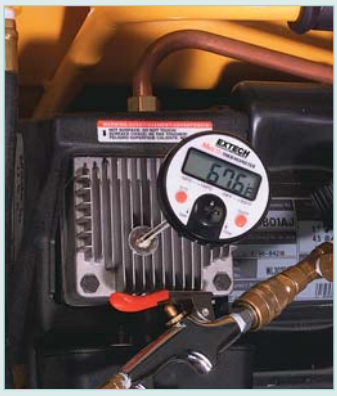

Flat surface stem thermometer ideal for measuring high temperature on motors and other flat surface areas including grills.

Ordering Information:

392050 .....Dial Stem Thermometer
392052 .....Dial Flat Surface Stem Thermometer

CE 1 WARRANTY YEAR

Specifications subject to change without notice.
Copyright © 2008 Extech Instruments Corporation. All rights reserved including the right of reproduction in whole or in part in any form.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Extech:

392052 392050