3AG Fast-Acting Fuses



For low time lag usage. 1¼ × ¼". Maximum 250 V. UL listed and CSA certified.

Stock No.	Mfr.'s Type	Amps	EACH*		
			5-95	100-245	250-495
846-4001	312.062	1/16	**.87**	**.69**	**.63**
846-4002	312.125	1/8	**1.16**	**.92**	**.77**
845-4003	312.175	0.175	**1.71**	**1.33**	**1.24**
845-4004	312.187	3/16	**1.71**	**1.57**	**1.44**
846-4005	312.250	¼	**.68**	**.56**	**.47**
845-4006	312.300	3/10	**.43**	**.40**	**.37**
845-4007	312.375	3/8	**.48**	**.44**	**.40**
846-4008	312.500	½	**.47**	**.38**	**.31**
846-4009	312.750	¾	**.42**	**.37**	**.30**
846-4010	312001	1	**.47**	**.31**	**.24**
846-4018	3121.25	1¼	**.27**	**.17**	**.15**
846-4011	31201.5	1½	**.31**	**.27**	**.21**
846-4012	312002	2	**.23**	**.19**	**.17**
846-4019	31202.5	2½	**.47**	**.30**	**.24**
846-4013	312003	3	**.45**	**.30**	**.22**
846-4014	312004	4	**.46**	**.39**	**.33**
846-4015	312005	5	**.35**	**.33**	**.31**
846-4016	312006	6	**.62**	**.52**	**.44**
846-4020	312007	7	**.43**	**.37**	**.31**
846-4017	312008	8	**.66**	**.51**	**.45**
846-4021	312010	10	**.64**	**.51**	**.45**

***Sold in multiples of 5 only.**

3AB Ceramic Body Fast-Acting Fuses

250 V or less. **Blow Time:** 100% 4 hour minimum; 135% 1 hour maximum; 200% 15 second maximum (⅛-12 A); 30 second maximum (15-30 A). 1¼ × ¼". UL listed thru15 amps. Certified by CSA thru 15 amps. UL recognized, 20-30 A.

Stock No.	Mfr.'s Type	Amps	EACH*		
			5-95	100-245	250-495
845-4553	314001	1	**1.07**	**.92**	**.84**
845-4022	314002	2	**.64**	**.53**	**.48**
845-4554	314003	3	**1.20**	**1.09**	**1.01**
845-4023	314004	4	**1.25**	**1.15**	**1.06**
845-4555	314005	5	**.59**	**.53**	**.49**
845-4556	314006	6	**1.24**	**1.13**	**1.03**
845-4024	314007	7	**1.21**	**1.09**	**1.00**
845-4557	314008	8	**.57**	**.50**	**.46**
846-4558	314010	10	**.96**	**.80**	**.66**
846-4559	314012	12	**.56**	**.50**	**.46**
846-4560	314015	15	**.97**	**.81**	**.68**
846-4561	314020	20	**1.12**	**.88**	**.74**
845-4562	314025	25†	**.70**	**.64**	**.58**
845-4025	314030	30†	**1.59**	**1.25**	**1.06**

***Sold in multiples of 5 only.** †125 V max.

Auto Fuseholder

ALECTRON



Rating: 20 amps. #14 gauge wire, 12" length. **Fuse Size:** ¼" × 1¼".

Stock No.	Mfr.'s Type	Description	EACH			
			1-99	100-499	500-999	1000-2499
247-2102	ZC-210B	Bakelite Auto Fuseholder	**1.54**	**1.27**	**.91**	**.84**

3AG Slo Blo® Fuses



For circuits with high inductive surge. 1¼ × ¼". Maximum 250 V except (†) denotes 32 V. **Approvals:** Listed by Underwriters Laboratories and certified by CSA thru 7 amps; Recognized under the components program of Underwriters Laboratories from 8-30 amps.

Stock No.	Mfr.'s Type	Amps	EACH*		
			5-95	100-245	250-495
845-4036	313.031	1/32	**2.10**	**1.91**	**1.77**
845-4037	313.062	1/16	**1.41**	**1.15**	**1.06**
845-4038	313.100	1/10	**2.36**	**1.86**	**1.58**
845-4039	313.125	1/8	**2.46**	**1.97**	**1.66**
845-4043	313.200	2/10	**1.33**	**1.18**	**1.09**
846-4044	313.250	¼	**1.13**	**.89**	**.74**
845-4045	313.300	3/10	**1.73**	**1.36**	**1.16**
845-4046	313.375	3/8	**1.90**	**1.47**	**1.27**
845-4047	313.400	4/10	**1.80**	**1.40**	**1.26**
846-4048	313.500	½	**.58**	**.53**	**.49**
845-4049	313.600	6/10	**1.36**	**1.07**	**.92**
846-4050	313.700	7/10	**.82**	**.66**	**.57**
846-4051	313.750	¾	**.80**	**.71**	**.64**
845-4052	313.800	8/10	**1.56**	**1.24**	**1.14**
846-4053	313001	1	**.69**	**.57**	**.48**
846-4054	3131.25	1¼	**1.04**	**.90**	**.76**
846-4055	31301.5	1½	**1.04**	**.88**	**.73**
845-4056	31301.6	1 9/10	**1.26**	**1.06**	**.89**
846-4057	313002	2	**.76**	**.64**	**.54**
846-4058	31302.5	2½	**1.03**	**.89**	**.72**
846-4059	313003	3	**1.06**	**.91**	**.75**
845-4060	31303.2	3 2/10	**.98**	**.84**	**.70**
846-4061	313004	4	**1.39**	**1.19**	**.99**
846-4062	313005	5	**.60**	**.54**	**.48**
846-4063	3136.25	6¼	**.57**	**.48**	**.39**
846-4064	313007	7	**.76**	**.65**	**.53**
846-4065	313008	8	**.73**	**.62**	**.51**
846-4066	313010	10†	**.88**	**.70**	**.58**
845-4400	313012	12†	**.94**	**.74**	**.63**
846-4067	313015	15†	**1.60**	**1.20**	**1.07**
845-4068	313020	20†	**1.12**	**.90**	**.76**
845-4405	313025	25†	**1.73**	**1.38**	**1.26**
845-4410	313030	30†	**.89**	**.72**	**.60**

***Sold in multiples of 5 only.** †32 V max.

1206 SMF Very Fast-Acting Thin-Film Fuse

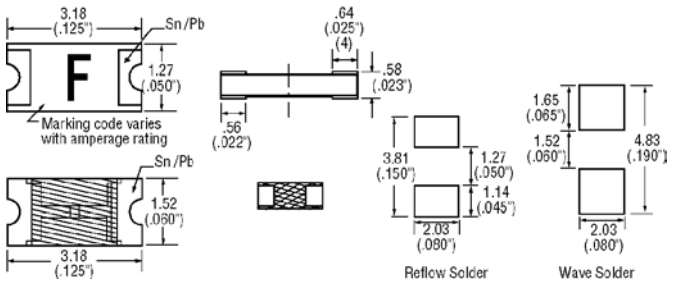

Recognized under the components program of Underwriters Laboratories and certified by CSA. **Interrupting Ratings:** 0.125 - 3 A at a rated voltage, 4-7 A - 50 A at a rated voltage, 3/8 A-125 V, 1-2 A-63 V, 3 A-32 V, 4-7 A-24 V. **Operating Temperature:** –55°C to 125°C. **Vibration:** Withstands 10-55 Hz per MIL-STD-202F, method 201a and 10-2000 Hz at 20 Gs per MIL-STD-202F, method 204D, condition D. **Insulation Resistance (After Opening):** Exceeds 20 megohms. **Resistance to Solder Heat:** Withstands 60 seconds above 200°C up to 260°C, maximum. **Thermal Shock:** Withstands 5 cycles of –5° to 125°C. **Materials**: Epoxy body/nickel/solder coated terminals. **Soldering Parameters. Wave Solder:** 500°F (260°C), 10 seconds, max. **Infrared:** 500°F (260°C), 30 seconds, max. **Voltage Rating:** to 125. **Agency File Numbers:** UL E10480, CSA LR 29862.

Stock No.	Mfr.'s Type	Ampere Rating	Marking Code	Nominal Resistance Cold Ohms*	Nominal Melting I²t A² Sec.†	EACH	
						1-49	50-99
845-7002	433 375	3/8	FE	0.37500	0.0028	**1.44**	**1.28**
845-7004	433 001	1	FH	0.09950	0.0350	**1.44**	**1.28**
845-7010	433 002	2	FN	0.03975	0.2300	**1.44**	**1.28**
845-7013	433 003	3	FP	0.02625	0.7000	**1.44**	**1.28**
845-7015	429 004	4	FS	0.01925	1.5000	**1.44**	**1.28**
845-7018	429 005	5	FT	0.00979	2.7000	**1.75**	**1.56**
845-7021	429 007	7	FU	0.01375	3.6000	**1.75**	**1.56**

*Measured at 10% of rated current, 25°C. †Measured at rated voltage. Tape and reel available.