
# Pomona®

# Model 4613 & 5525 Micrograbber° Test Clip, Each End

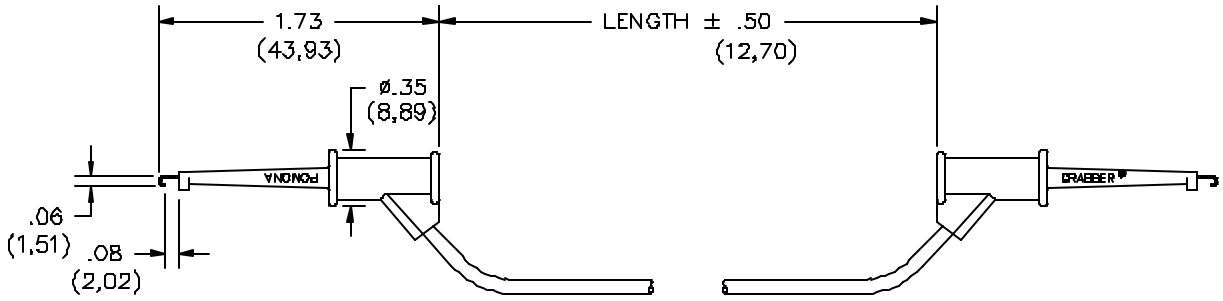


**FEATURES:**

- Ideal for providing jumper wires between small components.

**MATERIALS:**

Conn: 1st End - Micrograbber®

Material: Contact – Beryllium Copper per QQ-C-533, Alloy 165, ¼ HM.
Spring – Stainless Steel, Alloy 302.
Finish: Contact – Gold plated per MIL-G-45204, Type 1, Class 00.
Insulation: Glass filled nylon.
Marking: "POMONA ELECTRONICS" "MICROGRABBER®"
Wire: 20 AWG, stranding 41 x 36 t.c., PVC insulated 2.21 (.087) O.D.
Marking: "POMONA 4613-*"
Color: See Ordering Information.

Conn: Same as first end.

**RATINGS:**

Operating Temperature: +102ºC. (+216ºF.) Max.
Operating Voltage: 30VAC/60VDC Max.
Current: 3 Amperes

**ORDERING INFORMATION:** Model 4613-XX-*

Single Patch Cord: XX = Cable Lengths, Standard Lengths: 12" (305), 24" (610), 36" (914) & 48" (1219).
Additional lengths can be quoted upon request.
Ordering Example: 4613-48-2 Indicates 48" in length, color is Red

**ORDERING INFORMATION:** Model 5525

Kit containing 10 pieces of Model 4613-24, one of each color.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies.

Made in USA



**Sales: 800-490-2361 Fax: 888-403-3360**
**Technical Assistance: 800-241-2060**

Pomona*ACCESS* **90598** (800) 444-6785 or (425) 446-6010
More drawings available at www.pomonaelectronics.com