Clip / No. 520

PC Mount, 5x20mm Fuses

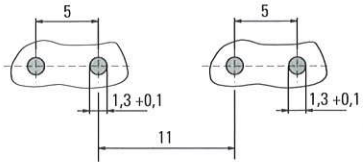





Specifications

Mounting
PC Board, 5mm pin spacing
Solder pins 0.4 x 1.2mm

Materials
Clip: Copper alloy
Solderable, tinned

Electrical Data (23°C)
Rated Voltage: 250V
Max. Current/Power: 6.3A/2.5W

Minimum Cross Section
Conducting path - 0.2mm^2

Unit Weight
0.4g

Packaging
Bulk (5000 pcs.)

Order Number
Clip No. 520 0000 100

Clip / No. 521

PC Mount, 5x20mm Fuses 90° Pin Shift



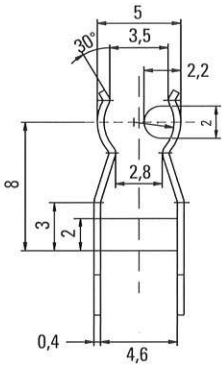



Specifications

Mounting
PC Board, 5mm pin spacing
Solder pins 0.4 x 1.2mm

Materials
Clip: Copper alloy
Solderable, tinned

Electrical Data (23°C)
Rated Voltage: 250V
Max. Current/Power: 6.3A/2.5W

Minimum Cross Section
Conducting path - 0.2mm^2

Unit Weight
0.4g

Packaging
Bulk (5000 pcs.)

Order Number
Clip No. 521 0000 100

Clip / No. 519

PC Mount, 5x20mm Fuses Taped



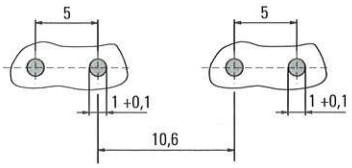

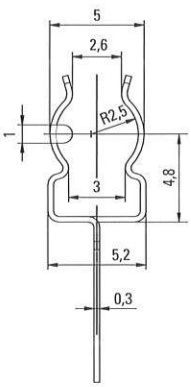

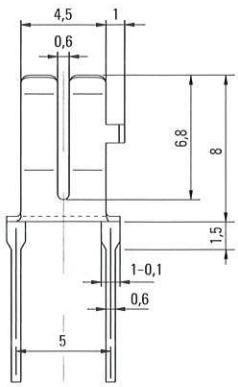

Specifications

Mounting
PC Board, 5mm pin spacing
Solder pins 0.3 x 0.5mm

Materials
Clip: Copper alloy
Solderable, tinned

Electrical Data (23°C)
Rated Voltage: 250V
Max. Current/Power: 2.5A/1W

Minimum Cross Section
Conducting path - 0.1mm^2

Unit Weight
0.5g

Packaging
Tape/Reel (1000 pcs.)

Order Number
Clip No. 519 0000 100

WebSite: www.wickmann.com
FaxBack: +1 (404) 699-6176
• Europe Tel: +49 (2302) 662-107
E-mail: sales@wickmann.com
• Americas Tel: +1 (404) 699-7820
E-mail: service@wickmannusa.com
• Asia Tel: +852 26 14-1108
E-mail: sales@wickmann.com.hk