523 Series 5×20mm Fuse Clips for Automated Pick In Place (PIP)

Product Characteristics (For 523 PIP Clip)

Materials	**Copper alloy Solderable, tinned**
Electrical Data (23ºC)	**Rated Voltage:** 250V
	Max. Current/Power: 6.3A/2.5W
Mounting	PC Board, 5,2 mm pin spacing Solder pins 0.4×1.2 mm
Solderability	235 °C for SnPb solder and 250 °C for PB-free solder (IEC 60068-2-20)
Soldering Heat Resistance	260 °C, 10 s (IEC 60068-2-20)
Minimum Cross Section	Conducting path - 0.2mm²
Unit Weight	0.4g

Product Dimensions

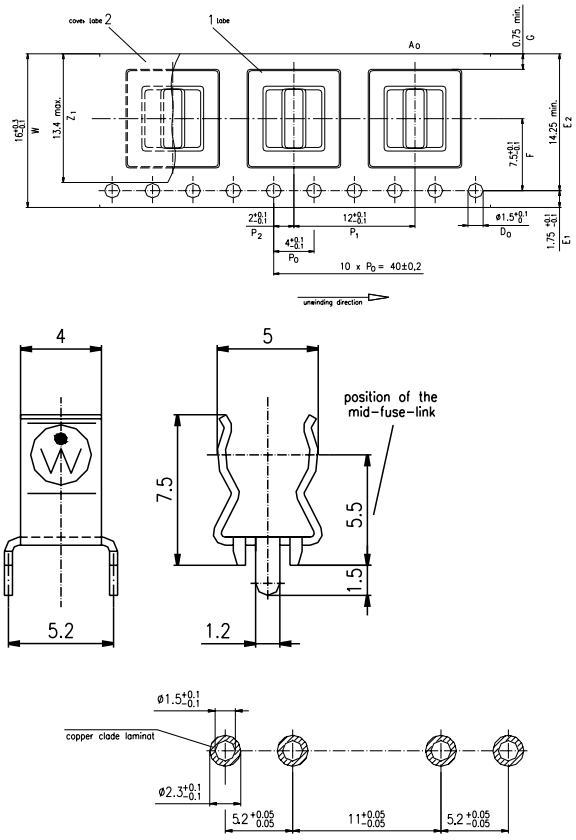

Mounting Dimensions

Ordering Information

Ordering PN	Clip Material	Plating	Packaging Available
5230000S001	Phosphor Bronze	Tin-plated	Tape and reel 800 pcs

Additional Information

Datasheet | **Resources** | **Samples**

© 2013 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: 12/19/13