Pomona®

Model 5419
Minipincer® Test Clips Each End

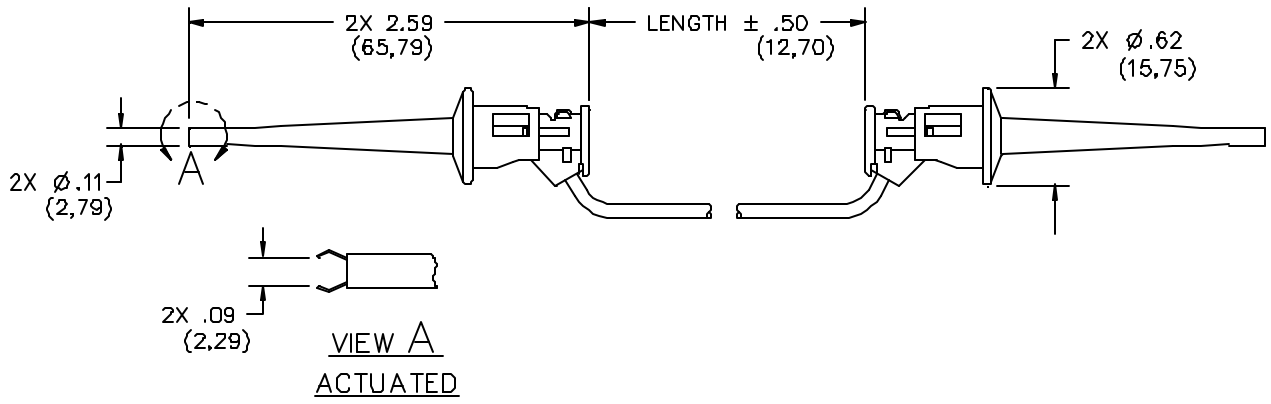

FEATURES:

- Ideal for providing jumper wires between small components.

MATERIALS:

Conn**:** 1st End - Minipincer® Test Clip
Material: Beryllium copper contact.
Finish: Gold plated.
Insulation: Nylon
Wire: 20 AWG, 41 x 36 t.c. PVC insulated, 2.2 (.087) O.D.
Marking: "POMONA 5419-XX-*"
Conn: 2nd End – Same as first

RATINGS:

Operating Temperature: +80ºC. (+176ºF.) Max.
Voltage: Hand-held testing: 30VAC/60VDC Max.
Hands free testing in controlled voltage environments: 300 WVDC Max.
Current: 5 Amperes Max.

ORDERING INFORMATION: Model 5419-XX-*
XX – Cable Lengths, Standard Lengths: 8" (203), 12" (305), 18" (457), 24" (610), 36" (914), 48" (1219) & 60" (1524).
*= Color, -0 Black, -2 Red
Ordering Example: 5419-60-2 Indicates 60" in length, color is Red

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 888-403-3360
Technical Assistance: 800-241-2060