
Littelfuse

Holder / No. 647

RoHS

Cable Type, 5x20mm Fuses lead free



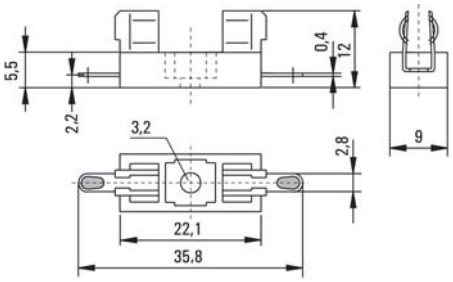

Specifications

Packaging
Bulk (1000 pcs.)

Mounting
∅3mm screw hole

Terminals
Solderable or 2.8mm quick connect - fits 0.5mm tabs

Materials

Holder:	Black Thermoplastic, UL94 V-0 Polyamide PA 6.6
Metal Parts:	Copper alloy, solderable, tinned

Electrical Data (23°C)

Rated Voltage:	250V
Max. current/power:	6.3A/2.5W 6.3A/1.6W (with No. 640)


Minimum Cross Section
Conducting path - 2.5mm²

Unit Weight
1.7g

Adapter / No. 640

RoHS



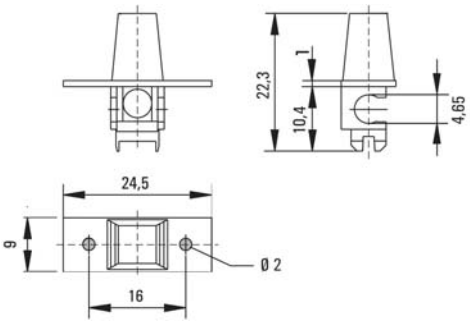

Contact WICKMANN for an auto-insertable fuse, holder and adapter assembly.

Mounting
Hand adapter can be optionally used with Holder No. 646 and 647

Materials

Adapter:	Polyester PBT, UL94 V-0

Unit Weight
1.0g

Packaging
Bulk (5000 pcs.)

Colours

Adapter black	100
Adapter brown	140
Adapter white	150
Adapter yellow	160
Adapter green	170
Adapter blue	190

Contact WICKMANN for an auto-insertable fuse, holder and adapter assembly.

Order Information

Qty.	Order Number	Series		Colour
		647	*0000*	

Specifications are subject to change without notice

Note: 1.00 means the number one with two decimal places. 1,000 means the number one thousand.

WICKMANN

In our continuing strategy to deliver unparalleled circuit protection solutions, technical expertise and application leadership, we proudly introduce the WICKMANN Group and its products to the Littelfuse portfolio.