# Miniature Steel Alligator Clip, 5 Amp

**Features**
- **Nickel Plated**
- **Crimp or Solder Connection**
- **Overall Length: 1.100" (27.9mm)**
- **Jaw Opening: .190" (4.8mm)**

| NTE Type No. | Description |
|---|---|
| 72–123 | Miniature Steel Alligator Clip |

**See page 24 for recommended insulators.**

**See page 15 for clip & insulator combinations.**

# Miniature Solid Copper Alligator Clip, 5 Amp

**Features**
- **Crimp or Solder Connection**
- **Overall Length: 1.100" (27.9mm)**
- **Jaw Opening: .190" (4.8mm)**

| NTE Type No. | Description |
|---|---|
| 72–125 | Miniature Solid Copper Alligator Clip |

**See page 24 for recommended insulators.**

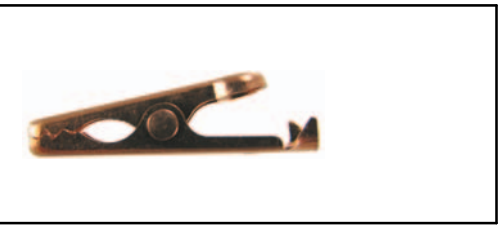

**See page 15 for clip & insulator combinations.**

# Mini Steel Alligator Clip w/Barrel, 5 Amp

**Features**
- **Nickel Plated**
- **Crimp or Solder Connection Barrel Tail**
- **Overall Length: 1.250" (31.7mm)**
- **Jaw Opening: .190" (4.8mm)**

| NTE Type No. | Description |
|---|---|
| 72–124 | Miniature Steel Alligator Clip with Barrel |

**See page 24 for recommended insulators.**

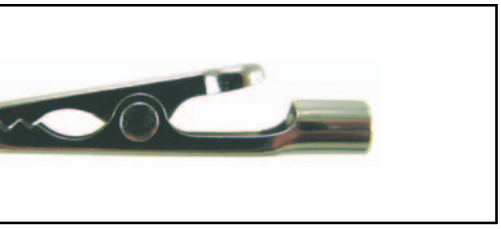

**See page 15 for clip & insulator combinations.**

# Mini Steel Alligator Clip w/Threaded Barrel, 5 Amp

**Features**
- **Nickel Plated**
- **6–32 UNC Threaded Barrel Connection**
- **Overall Length: 1.500" (38.1mm)**
- **Jaw Opening: .190" (4.8mm)**

| NTE Type No. | Description |
|---|---|
| 72–126 | Miniature Steel Alligator Clip with Threaded Barrel |

**See page 24 for recommended insulators.**

# Steel Alligator Clip, 5 Amp

**Features**
- **Nickel Plated Clip**
- **Crimp/Solder Connection**
- **Overall Length: 1.690" (42.9mm)**
- **Jaw Opening: .310" (7.87mm)**

| NTE Type No. | Description |
|---|---|
| 72–159 | Steel Alligator Clip |

**See page 26 for recommended insulators.**

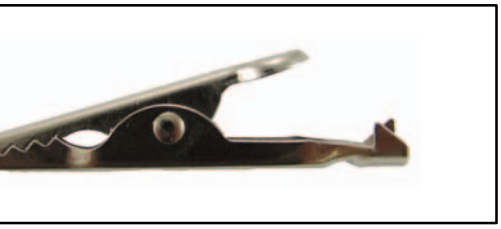

**See page 16 for clip & insulator combinations.**

# Steel Alligator Clip w/Screw, 5 Amp

**Features**
- **Nickel Plated Clip**
- **6–40 Screw or Crimp Connection**
- **Overall Length: 1.690" (42.86mm)**
- **Jaw Opening: .310" (7.9mm)**

| NTE Type No. | Description |
|---|---|
| 72–186 | Steel Alligator Clip with Screw |

# Toothless Steel Alligator Clip, 5 Amp

**Features**
- **Smooth Micro Tipped Jaws**
- **Crimp or Solder Connection**
- **Overall Length: 1.100" (27.9mm)**
- **Jaw Opening: .220" (5.58mm)**

| NTE Type No. | Description |
|---|---|
| 72–129 | Toothless Steel Alligator Clip |

**See page 24 for recommended insulators.**

**See page 15 for clip & insulator combinations.**

# Toothless Solid Copper Alligator Clip, 5 Amp

**Features**
- **Smooth Micro Tipped Jaws**
- **Crimp or Solder Connection**
- **Overall Length: 1.100" (27.9mm)**
- **Jaw Opening: .220" (5.58mm)**

| NTE Type No. | Description |
|---|---|
| 72–130 | Toothless Solid Copper Alligator Clip |

**See page 24 for recommended insulators.**

**See page 16 for clip & insulator combinations.**

# Steel Alligator Clip w/Barrel, 10 Amp

**Features**
- **Nickel Plated**
- **Crimp/Solder or Banana Plug Connection**
- **Overall Length: 1.950" (49.5mm)**
- **Jaw Opening: .310" (7.87mm)**

| NTE Type No. | Description |
|---|---|
| 72–148 | Steel Alligator Clip with Barrel |

**See page 25 for recommended insulators.**

**See page 16 for clip & insulator combinations.**

# Solid Copper Alligator Clip w/Barrel, 10 Amp

**Features**
- **Crimp/Solder or Banana Plug Connection**
- **Overall Length: 1.950" (49.5mm)**
- **Jaw Opening: .310" (7.87mm)**

| NTE Type No. | Description |
|---|---|
| 72–149 | Solid Copper Alligator Clip with Barrel |

**See page 25 for recommended insulators.**

**See page 17 for clip & insulator combinations.**

# Solid Copper Alligator Clip w/Barrel & Screw, 10 Amp

**Features**
- **Screw Connection**
- **Overall Length: 1.950" (49.5mm)**
- **Jaw Opening: .310" (7.87mm)**

| NTE Type No. | Description |
|---|---|
| 72–151 | Solid Copper Alligator Clip with Barrel & Screw |

**See page 25 for recommended insulators.**

**See page 17 for clip & insulator combinations.**

# Steel Alligator Clip w/Barrel & Screw, 10 Amp

**Features**
- **Nickel Plated**
- **Screw Connection**
- **Overall Length: 1.950" (49.5mm)**
- **Jaw Opening: .310" (7.87mm)**

| NTE Type No. | Description |
|---|---|
| 72–153 | Steel Alligator Clip with Barrel & Screw |

**See page 25 for recommended insulators.**

**See page 17 for clip & insulator combinations.**

# Steel Alligator Clip w/Threaded Barrel, 10 Amp

**Features**
- **Nickel Plated**
- **8–32 UNC Threaded Barrel Connection**
- **Overall Length: 2.125" (53.9mm)**
- **Jaw Opening: .310" (7.87mm)**

| NTE Type No. | Description |
|---|---|
| 72–154 | Steel Alligator Clip with Threaded Barrel |

**See page 25 for recommended insulators.**

**See page 17 for clip & insulator combinations.**

# Steel Alligator Clip w/U–Shaped Tail, 10 Amp

**Features**
- **Nickel Plated Clip**
- **Crimp/Solder Connection**
- **Overall Length: 1.950" (49.5mm)**
- **Jaw Opening: .310" (7.87mm)**

| NTE Type No. | Description |
|---|---|
| 72–155 | Steel Alligator Clip with U–Shaped Tail |

**See page 25 for recommended insulators.**

**See page 18 for clip & insulator combinations.**

# Stainless Steel Alligator Clip w/Barrel, 10 Amp

**Features**
- **Crimp/Solder or Banana Plug Connection**
- **Overall Length: 1.950" (49.5mm)**
- **Jaw Opening: .310" (7.87mm)**

| NTE Type No. | Description |
|---|---|
| 72–156 | Stainless Steel Alligator Clip with Barrel |

**See page 25 for recommended insulators.**

**See page 18 for clip & insulator combinations.**

# Solid Copper Alligator Clip, 10 Amp

**Features**
- **Crimp/Solder Connection**
- **Overall Length: 1.690" (42.9mm)**
- **Jaw Opening: .310" (7.87mm)**

| NTE Type No. | Description |
|---|---|
| 72–160 | Solid Copper Alligator Clip |

**See page 26 for recommended insulators.**

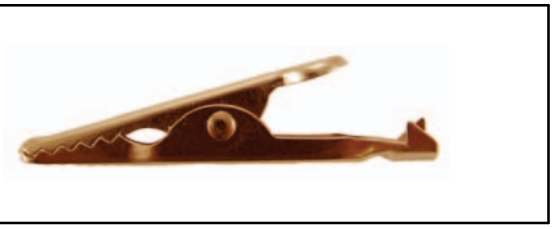

**See page 18 for clip & insulator combinations.**

# Phone Tip Steel Alligator Clip, 10 Amp

**Features**
- **Nickel Plated Clip**
- **Accepts Standard Phone Tip or Test Probe Tip**
- **Overall Length: 1.970" (50mm)**
- **Jaw Opening: .310" (7.9mm)**

| NTE Type No. | Description |
|---|---|
| 72–181 | Phone Tip Steel Alligator Clip |

**See page 25 for recommended insulators.**

# Solid Copper Alligator Clip w/Screw, 10 Amp

**Features**
- **6–40 Screw or Crimp Connection**
- **Overall Length: 1.690" (42.86mm)**
- **Jaw Opening: .310" (7.9mm)**

| NTE Type No. | Description |
|---|---|
| 72–187 | Solid Copper Alligator Clip with Screw |

# Steel Alligator Clip, Fang Tooth w/Barrel

**Features**
- **Nickel Plated Clip**
- **Crimp/Solder or Banana Plug Connection**
- **Grips Both Fine and Thick Conductors**
- **Overall Length: 1.920" (48.7mm)**
- **Jaw Opening: .390" (9.9mm)**

| NTE Type No. | Description |
|---|---|
| 72–098 | Steel Alligator Clip, Fang Tooth with Barrel |

# Steel Alligator Clip w/Barrel, Screw & Handle, 10 Amp

**Features**

- **Nickel Plated Clip with Insulated Handle**
- **Banana Plug or Screw Connection**
- **Overall Length: 1.950" (49.5mm)**
- **Jaw Opening: .310" (7.87mm)**

| NTE Type No. | Description |
|---|---|
| 72–152–0 | Steel Alligator Clip with Barrel, Screw and Black Insulated Handle |
| 72–152–2 | Steel Alligator Clip with Barrel, Screw and Red Insulated Handle |
| 72–152–KIT | 2 Each of 72–152–0 (Black) & 72–152–2 (Red) |

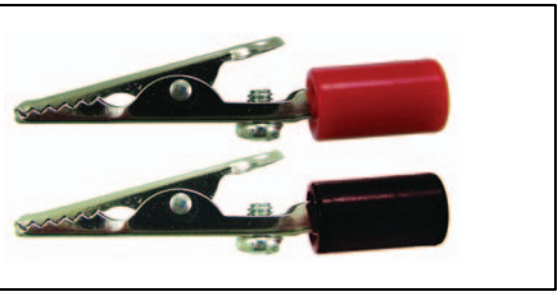

# Solid Copper Alligator Clip w/Barrel, Screw & Handle, 10 Amp

**Features**

- **Solid Copper Clip with Insulated Handle**
- **Banana Plug or Screw Connection**
- **Overall Length: 2.344" (59.53mm)**
- **Jaw Opening: .310" (7.87mm)**

| NTE Type No. | Description |
|---|---|
| 72–150–0 | Solid Copper Alligator Clip with Barrel, Screw and Black Insulated Handle |
| 72–150–2 | Solid Copper Alligator Clip with Barrel, Screw and Red Insulated Handle |
| 72–150–4 | Solid Copper Alligator Clip with Barrel, Screw and Yellow Insulated Handle |
| 72–150–5 | Solid Copper Alligator Clip with Barrel, Screw and Green Insulated Handle |
| 72–150–6 | Solid Copper Alligator Clip with Barrel, Screw and Blue Insulated Handle |
| 72–150–9 | Solid Copper Alligator Clip with Barrel, Screw and White Insulated Handle |
| 72–150–KIT | 2 Each of 72–150–0 (Black) & 72–150–2 (Red) |

# Steel Alligator Clip, Insulated, 10 Amp

**Features**

- **Nickel Plated Clip**
- **Includes Skin Tight Insulation**
- **Banana Plug or Screw Connection**
- **Overall Length: 2.125" (53.9mm)**
- **Jaw Opening: .310" (7.87mm)**

| NTE Type No. | Description |
|---|---|
| 72–158–0 | Steel Alligator Clip w/Skin Tight Insulation, Black |
| 72–158–2 | Steel Alligator Clip w/Skin Tight Insulation, Red |
| 72–158–KIT | 2 Each of 72–158–0 (Black) & 72–158–2 (Red) |

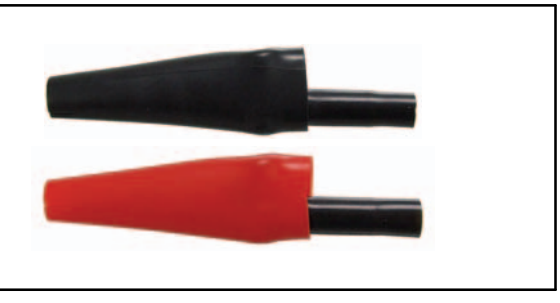

# Steel Alligator Clip w/Insulated Handle, 10 Amp

**Features**
- **Nickel Plated Clip**
- **Tenite Acetate Insulated Handle**
- **Overall Length: 2.234" (56.75mm)**
- **Jaw Opening: .310" (7.87mm)**

| NTE Type No. | Description |
|---|---|
| 72–185–0 | Steel Alligator Clip with Black Insulated Handle |
| 72–185–2 | Steel Alligator Clip with Red Insulated Handle |

# Steel Alligator Clip w/Insulated Grip & Screw, 10 Amp

**Features**
- **Nickel Plated Clip**
- **PVC Insulated Handle**
- **Overall Length: 2.480" (62.99mm)**
- **Jaw Opening: .512" (13.0mm)**

| | NTE Type No. | Description |
|---|---|---|
| *NEW* | 72–189–0 | Steel Alligator Clip with Screw & Black Insulated Handle |
| *NEW* | 72–189–2 | Steel Alligator Clip with Screw & Red Insulated Handle |

# Telecom Clip, Bed of Nails & Single Spike Combo

**Features**
- **Nickel–Silver Jaw Material**
- **Ideal for Telecom Applications**
- **Crimp or Solder Connection**
- **Overall Length: 2.600" (66.0mm)**
- **Jaw Opening: 1.000" (25.4mm)**

| NTE Type No. | Description |
|---|---|
| 72–096 | Insulator–Piercing Alligator Clip, Glove Style |

**See page 27 for recommended insulators.**

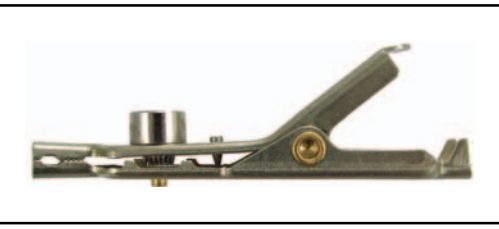

**See page 21 for clip & insulator combinations.**

# Telecom Clip, Bed of Nails & Single Spike Combo

**Features**
- **Nickel–Silver Jaw Material**
- **Ideal for Telecom Applications**
- **Crimp or Solder Connection**
- **Overall Length: 2.600" (66.0mm)**
- **Jaw Opening: 1.000" (25.4mm)**

| NTE Type No. | Description |
|---|---|
| 72–167 | Insulator–Piercing Alligator Clip, Mitten Style, with Hardware |
| 72–168 | Insulator–Piercing Alligator Clip, Mitten Style |

**See page 26 for recommended insulators.**

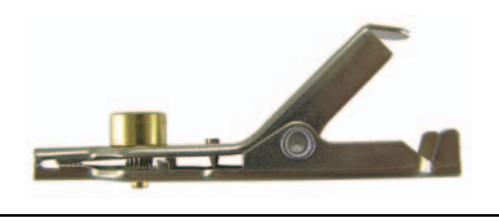

**See page 22 for clip & insulator combinations.**