Holder / No. 800

Panel Mount, Shocksafe 5x20mm / 6.3x32mm Fuses

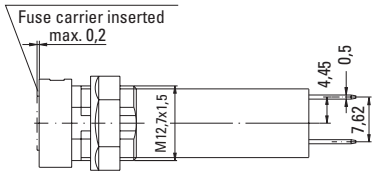



Panel alternatives

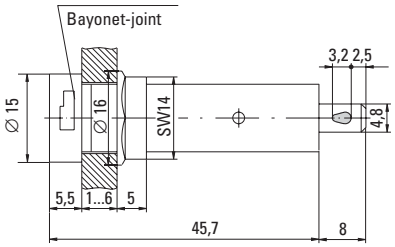

Cap / No. 815

For 5x20mm Fuses

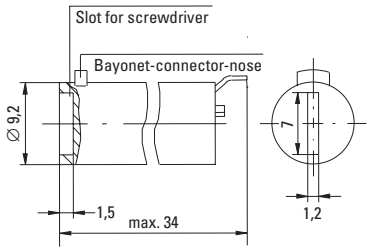

Cap / No. 816

For 6.3x32mm Fuses

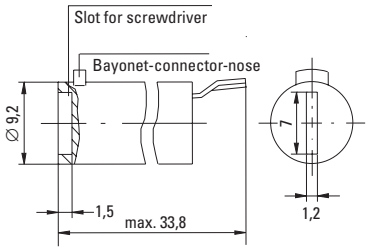

Order Information

Packaging
Bulk (100 pcs.)

Order Numbers

Holder	No. 800 0000 000
Cap, 5x20mm	No. 815 0000 000
Cap, 6.3x32mm	No. 816 0000 000

RoHS

Note: 1.00 means the number one with two decimal places. 1,000 means the number one thousand.

Specifications

Standard
IEC 60127-6
UL 512
CSA C22.2. No.39

Approvals
VDE: License No. 122016
SEMKO: Certificate No. 9850284
UL Recognized: File No. E 70164
CSA Certified: File No. 47574

Mounting
12.7mm diameter D-hole or double D-hole
Admissible torque on plastic hex nut is 1.2Nm

Terminals
Solderable or 4.8mm quick connect-fits 0.5mm tab

Protection Class & Category
IP 40 (IEC 60529)
PC2 (IEC 60127-6)

Materials

Holder/Cap:	Black Thermoplastic Polyamide PA 6.6, UL94 V-0
Metal Parts:	Copper alloy, corrosion protected
Terminals:	Solderable, tinned

Electrical Data (23°C)

Rated Voltage:	250V
Rated Current:	6.3A (800+815 - VDE/SEMKO) 10A (800+816 - VDE/SEMKO) 16A (UL/CSA)
Rated Power:	2.5W (VDE/SEMKO)

Operating Temperature
-25°C to +70°C (consider de-rating)

Climatic Test
-25°C/+70°C/21 days (IEC 60068-2-1...3)

Stock Conditions
+10°C to +60°C
relative humidity ≤ 75% yearly average, without dew, maximum value for 30 days - 95%

Vibration Resistance
24 cycles at 15 min. each (IEC 60068-2-6)
10 - 60Hz at 0.75mm amplitude
60 - 2000Hz at 10g acceleration

Contact Resistance
≤ 5mΩ

Dielectric Strength
> 1.5 kV

Impulse Voltage
4 kV, 50 Hz, 1 min., dry

Insulation Resistance
> 10^3 MΩ (500 VDC, 1 min.)

Solderability
235°C, 3 sec. (Wave)
350°C, 1 sec. (Soldering Iron)

Soldering Heat Resistance
260°C, 5 sec. (IEC 60068-2-20)

Minimum Cross Section
Conductor - 2.5mm^2

Marking
800, 250V, Approvals

Unit Weight
4.7g (Holder) / 2.5g (Cap)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Littelfuse:

80000000005 80000000105