main menue

home
test & measurement
products
skills
download

online catalogue T&M

clamp-type test probes
crocodile clips
test probes
oscilloscope test probes
measuring leads
plugs
- 2 mm system
- 2 mm safety system
- 4 mm system
- 4 mm sliding sleeve system
- 4 mm safety system

sockets
sets
miscellaneous

company

portrait
corporate association
location maps
fairs and exhibitions
jobs
imprint
terms and conditions

Home ▸ plugs ▸ plugs ▸ VST 20

VST 20


datasheet for VST 20
article number: 930050000



View Full-Size Image

SKS Kontaktechnik GmbH SKS Kont

product description:	order number: 930 050-000
description:	Fully mating connector as built-in pin, solder connection up to maximum cable cross-section of 2 mm². Nickel-plated brass contact material.
typ:	VST 20
system:	4mm system
order number:	930 050-000
technical data	
measurement category acc. to IEC 61010:	CAT I
pin dimensions	4 mm
type of contact:	pin (spring loaded)
type of termination:	M4 thread, solder
rated voltage:	30 VAC / 60 VDC
rated current: **Please consider derating curve!**	16 A
contact resistance:	3 mOhm
material	
contact material:	brass
contact surface material:	nickel
environmental conditions:	
temperature range:	-25 °C to +100 °C
drawing	

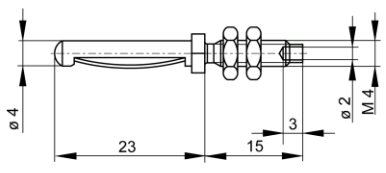

search online catalogue

Search

Search

Messetermine

SPS/IPC/DRIVES
24. 11. 2015 - 26. 11. 2015

QR-Code

© 2015 www.sks-kontakt.de
is Free Software released under the GNU General Public License.