CARD-O-PULLS™
Printed Circuit Board Card Ejectors & Handles

Spring Pin

Part No.	L	D
RP-250	1/4 (6.4)	3/32 (2.4)
RP-312	5/16 (8.0)	3/32 (2.4)
RP-375	3/8 (9.5)	1/8 (3.2)

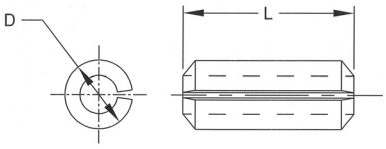

Material Specifications:
White Nylon, per ASTM D 4066 PA111
U.L. Rated 94V-2

Oxygen Rating Index:
Over 28%

Note: Passivated Stainless Steel Spring Pins per MIL-P-10971 furnished with each Ejector or Inserter/Extractor.

Standard Drawing Tolerances:
(unless otherwise indicated)

Fractions:	± 1/64 (0.4)
.X =	± 0.10 (2.5)
.XX =	± 0.01 (0.25)
.XXX =	± 0.005 (0.13)

Ordering Information:

CP-XX GN PA
- PA — *Pre-Assembled Pin*
- GN — *Color (WE for White)*
- CP-XX — *Base Part*

CP-26, 29 Series

RP-250 *Pin. WE for white or specify color*

Part No.	Card Thick
CP-26	1/16 (1.6)
CP-29	3/32 (2.4)

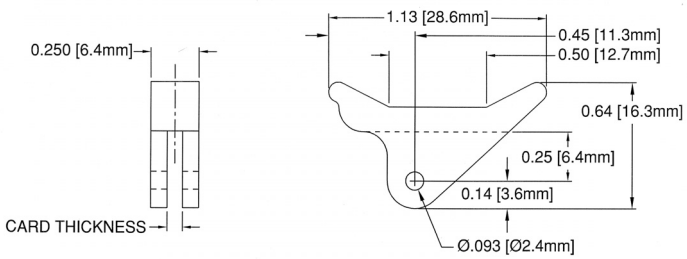

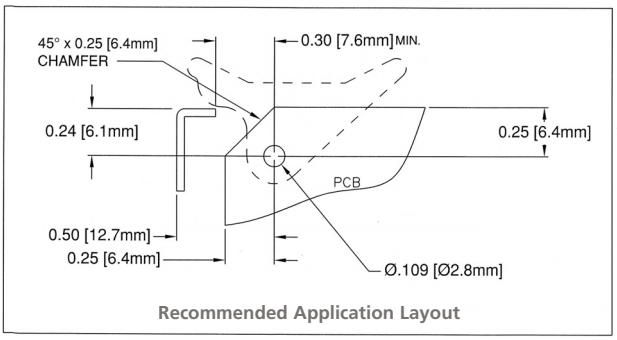

Recommended Application Layout

CP-36, 39 Series

RP-250 *Pin. WE for white or specify color*

Part No.	Card Thick
CP-36	1/16 (1.6)
CP-39	3/32 (2.4)

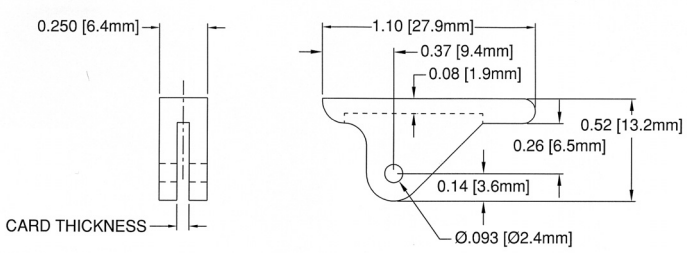

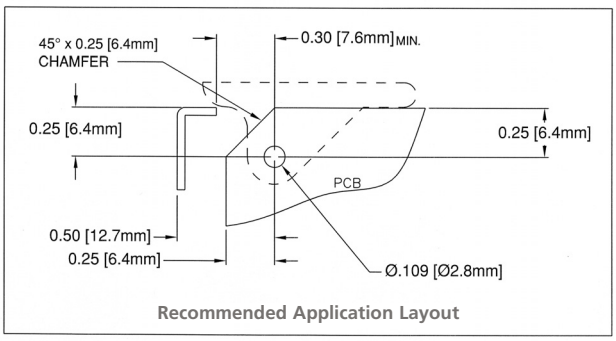

Recommended Application Layout