HAMMOND MANUFACTURING

Quality Products. Service Excellence.

Type 1 Mild Steel Splitter Trough *CST Series*

Hinged Door with Screw

Application

- The splitter troughs are designed for distribution of up to 600 V (max) service using either 3 or 4 wires.

Standards

- CSA Certified
- Complies with
  - IEC 60529, IP20

Construction

- Formed and spot welded from 14 or 16 gauge steel.
- Factory installed splitter blocks.
- Series of knockouts on each side.
- Padlocking hasp.

Finish

- Cover and enclosure are finished in recoatable smooth ANSI 61 gray powder coating.

Accessories

- Splitter Blocks
- Grounding Kits

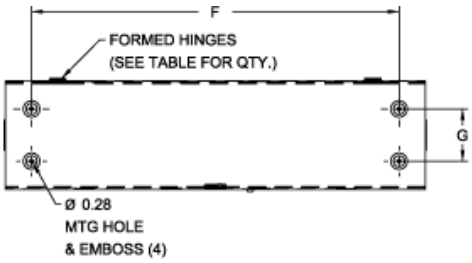

NOTE: KNOCKOUTS TYPICAL ON OPPOSITE SIDES

Top View

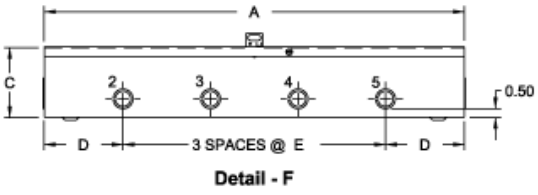

Detail - F

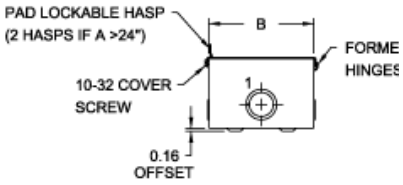

End View

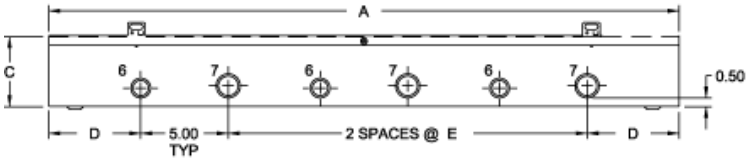

Detail - G

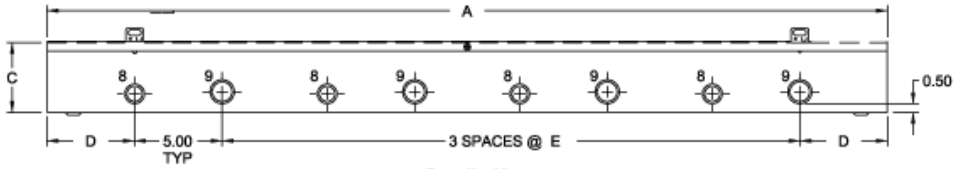

Detail - H

	Part Number		CU/AL	Dimensions			Ship Wt.
3 Wire	4 Wire	Less Blocks	Amps	H	W	D	lbs
CST273	**CST274**	-	70/70	24.00	6.00	4.00	12
CST373	**CST374**	-	70/70	36.00	6.00	4.00	17
CST473	**CST474**	-	70/70	48.00	6.00	4.00	21
CST2103	**CST2104**	**CST2100**	125/120	24.00	6.00	4.00	12
CST3103	**CST3104**	**CST3100**	125/120	36.00	6.00	4.00	17
CST4103	**CST4104**	**CST4100**	125/120	48.00	6.00	4.00	21
CST6103*	**CST6104***	**CST6100***	125/120	72.00	8.00	5.00	39
CST2203*	-	**CST2200***	225/225	24.00	8.00	5.00	16
CST3203*	**CST3204***	**CST3200***	225/225	36.00	8.00	5.00	22
CST4203*	**CST4204***	**CST4200***	225/225	48.00	8.00	5.00	27
CST5203*	**CST5204***	**CST5200***	225/225	60.00	8.00	5.00	33
CST6203*	**CST6204***	**-**	225/225	72.00	8.00	5.00	39
CST3403*	-	**CST3400***	400/340	36.00	10.00	6.00	35
CST4403*	**CST4404***	**CST4400***	400/340	48.00	10.00	6.00	45
CST5403*	**CST5404***	**CST5400***	400/340	60.00	10.00	6.00	58
CST6403*	**CST6404***	**CST6400***	400/340	72.00	10.00	6.00	62
CST4603*	**CST4604***	-	600/574	48.00	10.00	6.00	45
CST5603*	**CST5604***	-	600/574	60.00	10.00	6.00	58
CST6603*	**CST6604***	-	600/574	72.00	10.00	6.00	62

* 14 gauge steel

Data subject to change without notice

© 2015. Hammond Manufacturing Ltd. All rights reserved.