ワンタッチハンドルキャッチ
ONE-TOUCH LOCK HANDLE CATCHES

RoHS CAD **FA-822-C** アルミニウム製

PAT.PEND.



FA-822-C-L-1
鍵付き
With lock



FA-810-C-R
封印リング（オプション）
Seal ring (optional)

使用例は181ページ参照
Refer to P.181 for the use example.

キーNo.TAV230
Key



FA-822-C-L-2
鍵なし
Without lock


特　徴　Feature

- ハイセキュリティ錠前TAKシリーズ（TAV230）を標準装備し、防犯性、耐久性を向上しました。
- TAV230錠前は操作性に優れた防塵シャッター付リバーシブルキーです。
- ハンドルの断面形状によりS型、L型、X型の3タイプが選べます。
- 既存のハンドルキャッチ（FA-810-C）に代わる、ハイセキュリティキャッチです。
- オートロック仕様要求にも即対応可能です。
- 封印リングもオプションで取付け可能です。

- A high-security TAK lock (TAV230) is provided as standard equipment, ensuring greater security and durability.
- The TAV230 lock device is easy to use and has a dustproof shutter and reversible key.
- Available in three types, S-shaped, L-shaped and X-shaped, according to the cross-sectional shape of the handle.
- A high-security catch replaces the existing handle catch (FA-810-C).
- Requests for auto-locking type can be promptly met. Optional seal ring can also be installed.

仕　様　●材　　質：アルミニウム合金（ADC）
　　●表面仕上：焼付塗装（シルバーメタリック）
　　●付 属 品：キー2本
用　途　●特装車・コンテナー等のパイプハンドル用
納　期　●標準品・・・納期お問合せください
備　考　●鍵違い・オートロック仕様も即製作します。
⚠　●永くご使用頂くために定期的に摺動部に高性能潤滑剤C-985（1367ページ）を塗布してください。


Specifications　●Material: Aluminum alloy (ADC)
　　●Finish: Baked (silver metallic)
　　●Accessories: Two keys
Specific-use　●Pipe handles for specially equipped vehicles and containers
Remarks　●Auto-locking type can also be manufactured without delay.
⚠　●To prolong the life of the product, apply a regular coating of high-performance lubricant C-985 (P.1367) to the sliding parts.

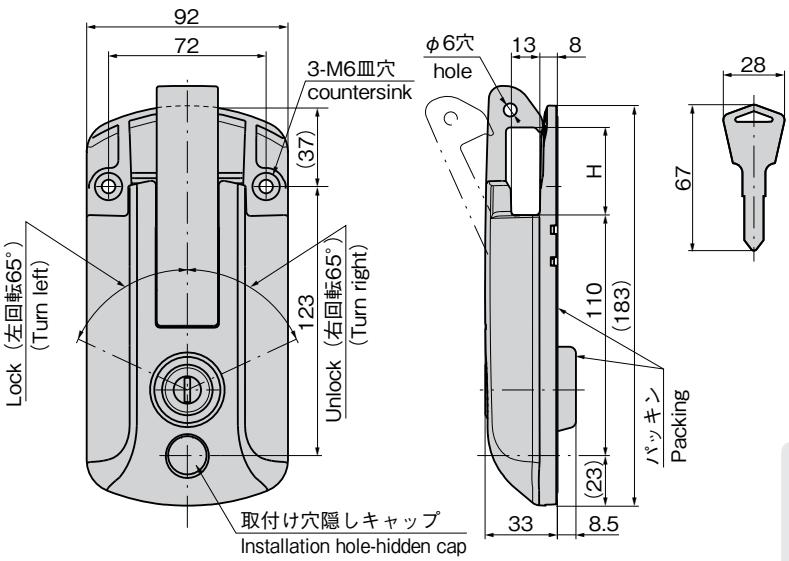


商品番号 Product No.	RoHS	CAD	備　考 Remarks	H	製品質量(g) Mass	コード Code	単　価 Price	量販価格 Bulk Price 数量 Quantity	単価 Price
FA-822-C-S-1	●	2D	鍵付き With lock	21	623	60818	¥5,100	6個～	¥4,896
FA-822-C-S-2	●	2D	鍵なし Without lock	21	503	60819	¥2,900	6個～	¥2,784
FA-822-C-L-1	●	2D	鍵付き With lock	35	621	60816	¥5,200	6個～	¥4,992
FA-822-C-L-2	●	2D	鍵なし Without lock	35	501	60817	¥2,900	6個～	¥2,784
FA-822-C-X-1	●	2D	鍵付き With lock	40	619	60820	¥5,200	6個～	¥4,992
FA-822-C-X-2	●	2D	鍵なし Without lock	40	499	60821	¥2,900	6個～	¥2,784

●：RoHS指令対応品　▲：RoHS指令に対応可能です。　※大量のご注文は更にお安くなります。

パネル穴明け寸法　Panel drilling dimensions

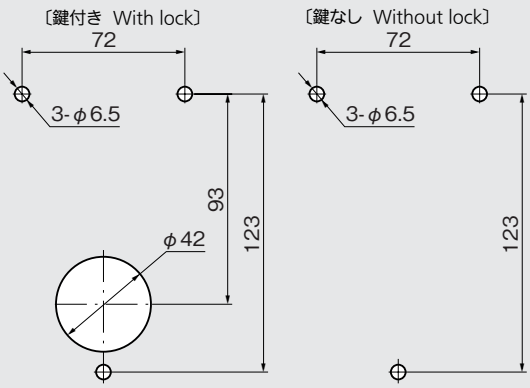

取付け方法
Installation method

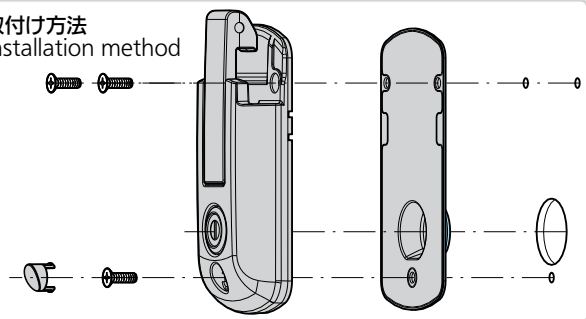

適用ハンドル断面寸法（最大）
Applicable handle cross section dimension (max.)

