

Heyco® Thick Panel Rubber Grommets

For Panels .250˝ (6,4 mm) to .375˝ (9,5 mm) Thick

MOUNTING HOLE DIAMETER		PART NO. Black	DESCRIPTION	MATERIAL	PART DIMENSIONS A Inside Diameter		B Head Diameter		C Overall Height	
in.	mm.				in.	mm.	in.	mm.	in.	mm.
For .250˝ (6,4 mm) Thick Panels										
.312	7,9	**G1023**	RG 312-6-8	SBR	.19	4,8	.44	11,1	.38	9,5
.437	11,1	**G1058**	RG 437-8-8	Nitrile	.25	6,4	.63	15,9		
.500	12,7	**G1086**	RG 500-10-8	Nitrile	.31	8,0	.63	15,9	.63	15,9
		G1095	RG 500-12-8	SBR	.38	9,5	.75	19,1	.50	12,7
.562	14,3	**G1117**	RG 562-10-8	Nitrile	.31	8,0	.81	20,6	.50	12,7
.625	15,9	**G1134**	RG 625-12-8	SBR	.38	9,5	.88	22,2		
.687	17,5	**G1154**	RG 687-14-8	SBR	.44	11,1	.94	23,8		
.812	20,6	**G1195**	RG 812-16-8	SBR	.50	12,7	1.06	27,0		
		G1200	RG 812-18-8	SBR	.56	14,3				
.875	22,2	**G1220**	RG 875-20-8	SBR	.63	15,9	1.13	28,6		
1.000	25,4	**G1257**	RG 1000-22-8	SBR	.69	17,5	1.31	33,3	.56	14,3
		G1264	RG 1000-28-8	SBR	.88	22,2	1.25	31,8	.63	15,9
1.062	27,0	**G1273**	RG 1062-24-8	SBR	.75	19,1	1.38	34,9	.56	14,3
1.125	28,6	**G1279***	RG 1125-26-8	SBR	.80	20,4	1.38	34,9	.51	12,9
1.250	31,8	**G1301**	RG 1250-24-8	SBR	.75	19,1	1.63	41,3	.44	11,1
		G1307	RG 1250-28-8	SBR	.88	22,2	1.63	41,3	.63	15,9
1.375	34,9	**G1324**	RG 1375-32-8	SBR	1.00	25,4	1.75	44,5	.63	15,9
1.500	38,1	**G1353**	RG 1500-40-8	SBR	1.25	31,8	1.75	44,5	.50	12,7
		G1354	RG 1500-40-8A	SBR	1.25	31,8	2.00	50,8	.52	13,1
1.750	44,5	**G1373**	RG 1750-48-8	SBR	1.50	38,1	2.00	50,8	.50	12,7
		G1374	RG 1750-48-8A	SBR	1.50	38,1	2.13	54,0	.63	15,9
2.000	50,8	**G1393**	RG 2000-56-8	SBR	1.75	44,5	2.50	63,5	.53	13,5
		G1394	RG 2000-56-8A	Nitrile	1.75	44,5	2.50	63,5	.56	14,2
2.500	63,5	**G1421**	RG 2.5-64-8	SBR	2.00	50,8	3.00	76,2	.56	14,3
		G1425	RG 2.5-72-8	SBR	2.25	57,2	3.00	76,2	.63	15,9
For .375˝ (9,5 mm) Thick Panels										
.375	9,5	**G1043**	RG 375-10-12	SBR	.31	8,0	.56	14,3	.50	12,7
.500	12,7	**G1096**	RG 500-12-12	SBR	.38	9,5	.63	15,9	.63	15,9
.562	14,3	**G1121**	RG 562-12-12	SBR	.38	9,5	.75	19,1	.75	19,1
.625	15,9	**G1136**	RG 625-13-12	SBR	.41	10,3	.81	20,6	.63	15,9
.750	19,1	**G1182**	RG 750-16-12	SBR	.50	12,7	1.00	25,4		
.875	22,2	**G1214**	RG 875-18-12	SBR	.56	14,3	1.06	27,0		
.968	24,6	**G1232**	RG 968-22-12	SBR	.69	17,4	1.31	33,3		
1.000	25,4	**G1249**	RG 1000-18-12	SBR	.56	14,3	1.25	31,8		
1.125	28,6	**G1278**	RG 1125-24-12	SBR	.75	19,1	1.63	41,3	1.13	28,6
1.250	31,8	**G1308**	RG 1250-28-12	Neoprene	.88	22,2	1.75	44,5	.75	19,1
		G1314	RG 1250-32-12	SBR	1.00	25,4	1.50	38,1	.63	15,9
1.375	34,9	**G1326**	RG 1375-32-12	SBR	1.00	25,4	1.75	44,5	.75	19,1
1.750	44,5	**G1375**	RG 1750-48-12	SBR	1.50	38,1	2.13	54,0		
2.000	50,8	**G1395**	RG 2000-56-12	SBR	1.75	44,5	2.50	63,5	.63	15,9
2.500	63,5	**G1427**	RG 2.5-72-12	SBR	2.25	57,2	3.00	76,2	.75	19,1

Standard color black. ***G1279** Panel Thickness is .257˝ (6,5 mm)

- **Used to protect through holes.** Help eliminate sharp edges so your wires are protected and add aesthetic value to your application.
- 40 sizes available that accommodate mounting holes ranging from .312˝ (7,9 mm) to holes as large as 2.50˝ (63,5 mm) in diameter and panel thicknesses of .250˝ (6,4 mm) and .375˝ (9,5 mm).
- Rubber grommets are constructed of SBR (unless otherwise noted) with an operating temperature range of -40°F (-40°C) to 221°F (105°C).
- SBR grommets have good water resistant characteristics and are suitable for most moderate chemicals and wet or dry organic acids.
- Provide vibration dampening.

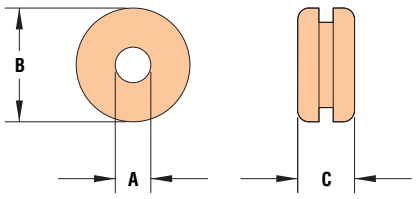

Material	SBR, Nitrile or Neoprene
Temperature Range	-40°F (-40°C) to 221°F (105°C)

Quick Specs