T-Tron® Very Fast Acting Fuses JJN

Class T
300 Volts, 1-1200 Amps



Catalog Symbol: JJN
Current Limiting
Very Fast Acting
Ampere Rating: 1 to1200 Amperes
Voltage Rating: 300 Volts AC (or less)*
Interrupting Rating: 200,000A RMS Sym.
Agency Approval:
UL Listed, Std. 248-15, Class T, Guide JDDZ, File E4273
CSA Certified, C22.2 No. 248.15, Class 1422-02, File 53787

Catalog Numbers


JJN-1	JJN-50	JJN-250
JJN-2	JJN-60	JJN-300
JJN-3	JJN-70	JJN-350
JJN-6	JJN-80	JJN-400
JJN-10	JJN-90	JJN-450
JJN-15	JJN-100	JJN-500
JJN-20	JJN-110	JJN-600
JJN-25	JJN-125	JJN-700
JJN-30	JJN-150	JJN-800
JJN-35	JJN-175	JJN-1000
JJN-40	JJN-200	JJN-1200
JJN-45	JJN-225	—

Carton Quantity and Weight–JJN-T-TRON (300 Volts AC)

Catalog Number	Carton Qty.	Weight** Lbs.	Weight** Kg.
1–30	10	0.12	0.054
35–60	10	0.23	0.104
70–100	5	0.36	0.163
110–200	1	0.14	0.063
225–400	1	0.25	0.113
450–600	1	0.44	0.200
700–800	1	0.80	0.363
1000–1200	1	1.45	0.658

*15-100A rated 300 VDC, 101-600A rated 160 VDC, 801-1200A rated 170 VDC and 10 KAIC.
**Weight per carton.

Dimensional Data

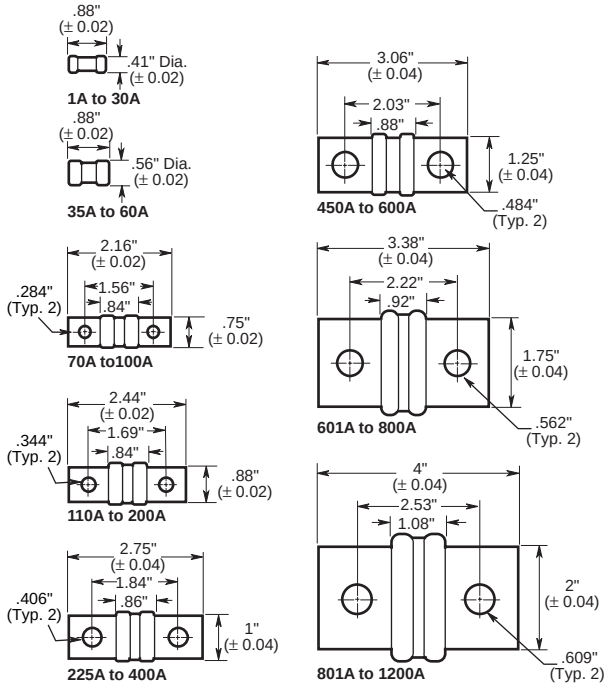

- Small, space-saving fuses provide a high degree of current limitation on short-circuits for excellent component protection.
- Commonly applied in electric heat circuits, load center, disconnect switches, and meters.
- The small size of the T-Tron fuses permits installation in panelboards and control centers for system upgrading when existing circuit breakers cannot safely interrupt larger available short-circuit currents.
- High speed of response for semiconductor protection.

Standard T Fuseblocks (300V) Catalog Data

Amps	Poles	Catalog Numbers Screw	Catalog Numbers Box Lug
½	2	T30030-2SR	T30030-2CR
to	3	T30030-3SR	T30030-3CR
30	4	T30030-4SR	T30030-4CR
31	2	T30060-2SR	T30060-2CR
to	3	T30060-3SR	T30060-3CR
60	4	T30060-4SR	T30060-4CR
61	1	–	T30100-1CR
to	2	–	T30100-2CR
100	3	–	T30100-3CR
101 to	1	–	T30200-1C
200	3	–	1B0083
201 to 400	1	–	T30400-1C
401 to 600	1	–	T30600-1C


CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000 VAC, 75-1500 VDC). Refer to BIF document #8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.

T-Tron® Very Fast Acting Fuses JJN

Class T


300 Volts, 1-1200 Amps

Current Limitation Curves

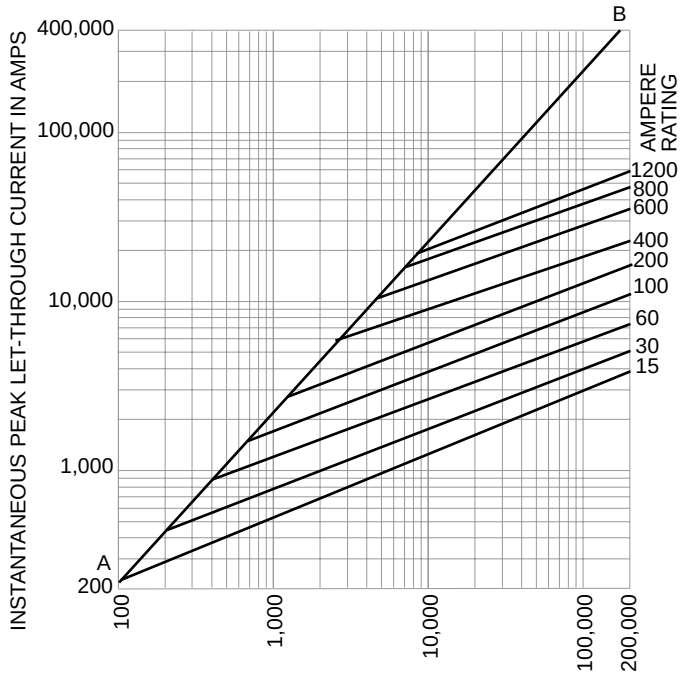


A-B = ASYMMETRICAL AVAILABLE PEAK (2.3 x SYMM RMS AMPS)

Time-Current Characteristic Curves–Average Melt

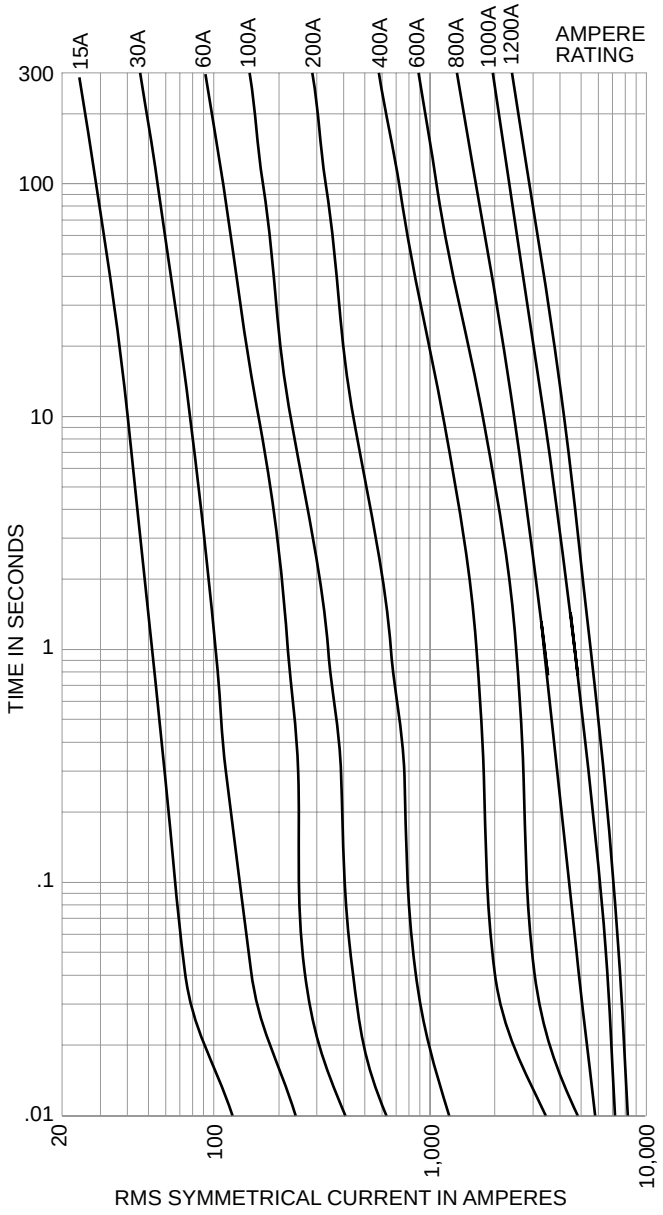

Custom Designs

- Printed circuit board variations available.

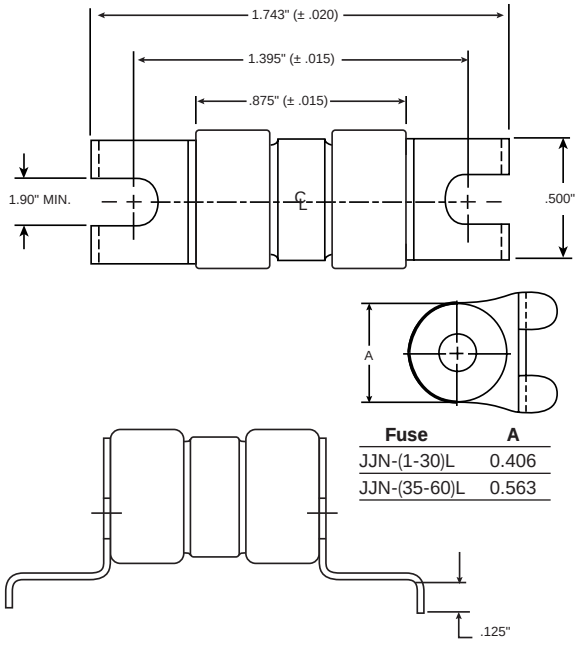

Fuse	A
JJN-(1-30)L	0.406
JJN-(35-60)L	0.563

The JJN-XXL products are UL Component Recognized under File E-56412

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.