LM741

Single Operational Amplifier

Features

- Short circuit protection
- Excellent temperature stability
- Internal frequency compensation
- High Input voltage range
- Null of offset

Description

The LM741 series are general purpose operational amplifiers. It is intended for a wide range of analog applications. The high gain and wide range of operating voltage provide superior performance in intergrator, summing amplifier, and general feedback applications.

8-DIP

8-SOP

Internal Block Diagram

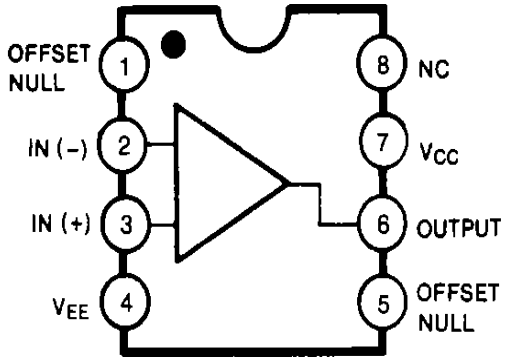

©2001 Fairchild Semiconductor Corporation

Schematic Diagram

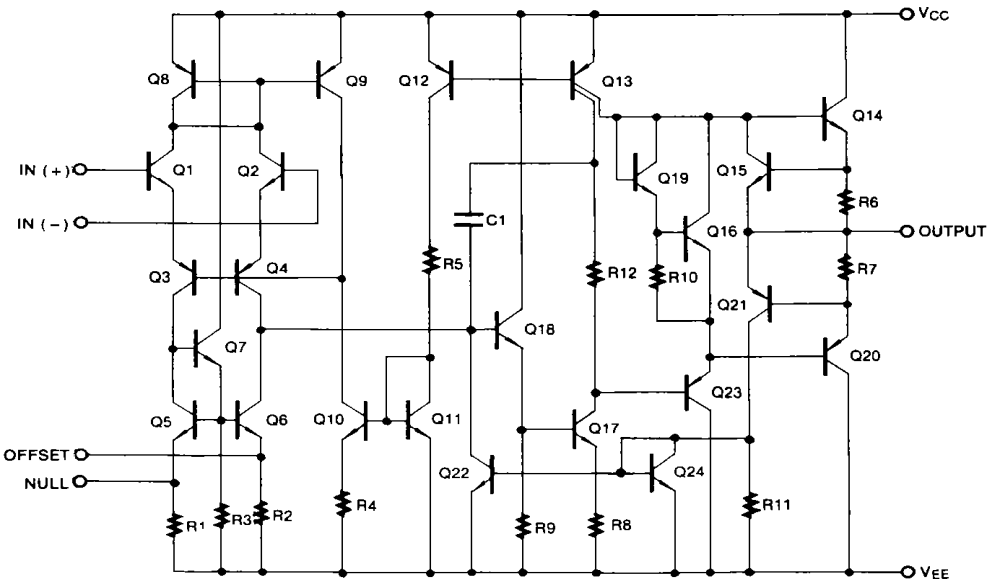

Absolute Maximum Ratings (T_A = 25°C)

Parameter	Symbol	Value	Unit
Supply Voltage	V_{CC}	±18	V
Differential Input Voltage	$V_{I(DIFF)}$	30	V
Input Voltage	V_I	±15	V
Output Short Circuit Duration	-	Indefinite	-
Power Dissipation	P_D	500	mW
Operating Temperature Range LM741C LM741I	T_{OPR}	 0 ~ + 70 -40 ~ +85	°C
Storage Temperature Range	T_{STG}	-65 ~ + 150	°C

Electrical Characteristics

(V_{CC} = 15V, V_{EE} = - 15V. T_A = 25 °C, unless otherwise specified)

Parameter		Symbol	Conditions		LM741C/LM741I			Unit
					Min.	Typ.	Max.	
Input Offset Voltage		V_{IO}	R_S≤10KΩ		-	2.0	6.0	mV
			R_S≤50Ω		-	-	-	
Input Offset Voltage Adjustment Range		$V_{IO(R)}$	V_{CC} = ±20V		-	±15	-	mV
Input Offset Current		I_{IO}	-		-	20	200	nA
Input Bias Current		I_{BIAS}	-		-	80	500	nA
Input Resistance (Note1)		R_I	V_{CC} =±20V		0.3	2.0	-	MΩ
Input Voltage Range		$V_{I(R)}$	-		±12	±13	-	V
Large Signal Voltage Gain		G_V	R_L≥2KΩ	V_{CC} =±20V, $V_{O(P-P)}$ =±15V	-	-	-	V/mV
				V_{CC} =±15V, $V_{O(P-P)}$ =±10V	20	200	-	
Output Short Circuit Current		I_{SC}	-		-	25	-	mA
Output Voltage Swing		$V_{O(P-P)}$	V_{CC} = ±20V	R_L≥10KΩ	-	-	-	V
				R_L≥2KΩ	-	-	-	
			V_{CC} = ±15V	R_L≥10KΩ	±12	±14	-	
				R_L≥2KΩ	±10	±13	-	
Common Mode Rejection Ratio		CMRR	R_S≤10KΩ, V_{CM} = ±12V		70	90	-	dB
			R_S≤50Ω, V_{CM} = ±12V		-	-	-	
Power Supply Rejection Ratio		PSRR	V_{CC} = ±15V to V_{CC} = ±15V R_S≤50Ω		-	-	-	dB
			V_{CC} = ±15V to V_{CC} = ±15V R_S≤10KΩ		77	96	-	
Transient Response	Rise Time	T_R	Unity Gain		-	0.3	-	µs
	Overshoot	OS			-	10	-	%
Bandwidth		BW	-		-	-	-	MHz
Slew Rate		SR	Unity Gain		-	0.5	-	V/µs
Supply Current		I_{CC}	R_L= ∞Ω		-	1.5	2.8	mA
Power Consumption		P_C	V_{CC} = ±20V		-	-	-	mW
			V_{CC} = ±15V		-	50	85	

Note:
1. Guaranteed by design.

Electrical Characteristics

(0°C ≤T_A≤70 °C V_{CC} = ±15V, unless otherwise specified)
The following specification apply over the range of 0°C ≤ T_A ≤ +70 °C for the LM741C; and the -40°C ≤ T_A ≤ +85 °C for the LM741I

Parameter	Symbol	Conditions		LM741C/LM741I			Unit
				Min.	Typ.	Max.	
Input Offset Voltage	V_{IO}	R_S≤50Ω		-	-	-	mV
		R_S≤10KΩ		-	-	7.5	
Input Offset Voltage Drift	$\Delta V_{IO}/\Delta T$	-		-	-		µV/ °C
Input Offset Current	I_{IO}	-		-	-	300	nA
Input Offset Current Drift	$\Delta I_{IO}/\Delta T$	-		-	-		nA/ °C
Input Bias Current	I_{BIAS}	-		-	-	0.8	µA
Input Resistance (Note1)	R_I	V_{CC} = ±20V		-	-	-	MΩ
Input Voltage Range	$V_{I(R)}$	-		±12	±13	-	V
Output Voltage Swing	$V_{O(P-P)}$	V_{CC} =±20V	R_S≥10KΩ	-	-	-	V
			R_S≥2KΩ	-	-	-	
		V_{CC} =±15V	R_S≥10KΩ	±12	±14	-	
			R_S≥2KΩ	±10	±13	-	
Output Short Circuit Current	I_{SC}	-		10	-	40	mA
Common Mode Rejection Ratio	CMRR	R_S≤10KΩ, V_{CM} = ±12V		70	90	-	dB
		R_S≤50Ω, V_{CM} = ±12V		-	-	-	
Power Supply Rejection Ratio	PSRR	V_{CC} = ±20V to ±5V	R_S≤50Ω	-	-	-	dB
			R_S≤10KΩ	77	96	-	
Large Signal Voltage Gain	G_V	R_S≥2KΩ	V_{CC} = ±20V, $V_{O(P-P)}$ = ±15V	-	-	-	V/mV
			V_{CC} = ±15V, $V_{O(P.P)}$ = ±10V	15	-	-	
			V_{CC} = ±15V, $V_{O(P-P)}$ = ±2V	-	-	-	

Note :
1. Guaranteed by design.

Typical Performance Characteristics

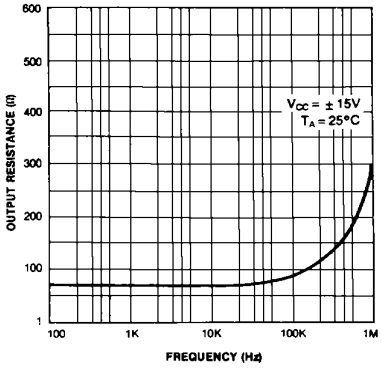

Figure 1. Output Resistance vs Frequency

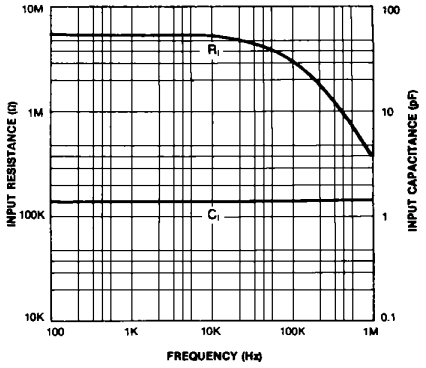

Figure 2. Input Resistance and Input Capacitance vs Frequency

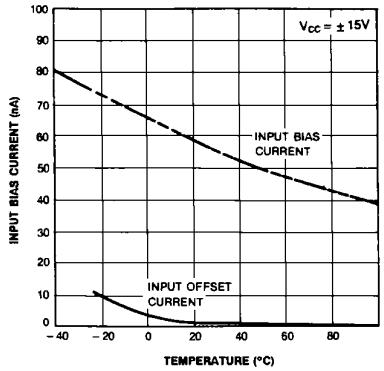

Figure 3. Input Bias Current vs Ambient Temperature

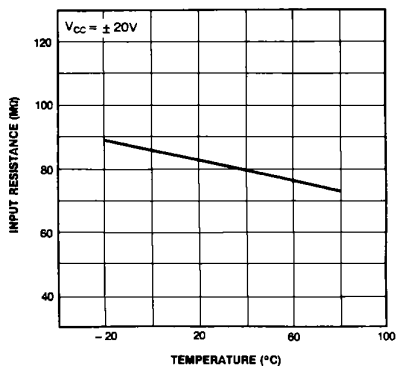

Figure 4. Power Consumption vs Ambient Temperature

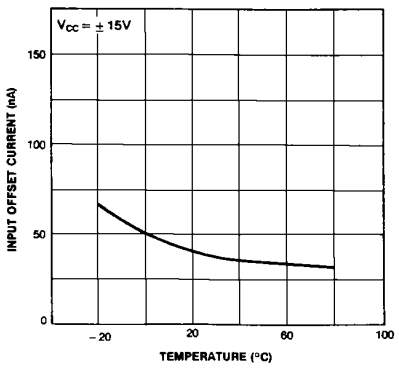

Figure 5. Input Offset Current vs Ambient Temperature

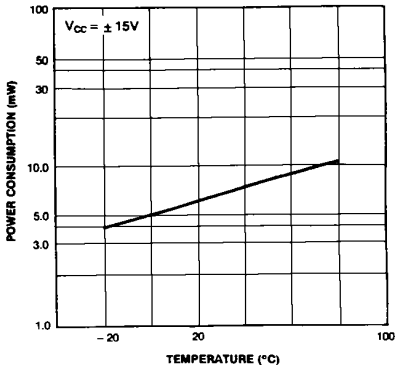

Figure 6. Input Resistance vs Ambient Temperature

Typical Performance Characteristics (continued)

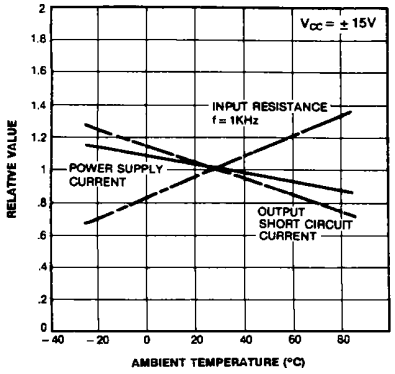

Figure 7. Normalized DC Parameters vs Ambient Temperature

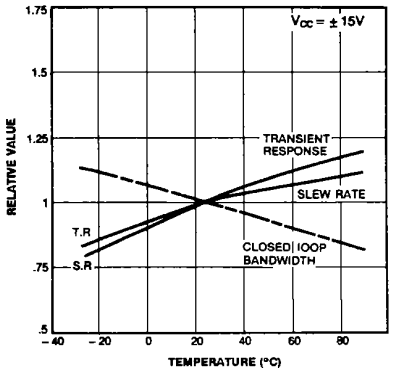

Figure 8. Frequency Characteristics vs Ambient Temperature

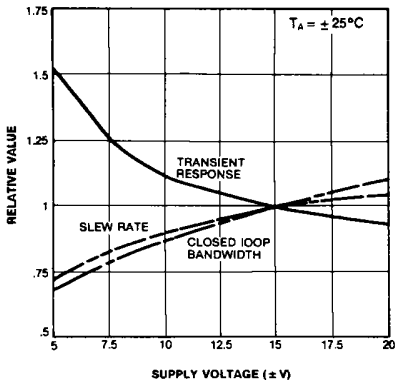

Figure 9. Frequency Characteristics vs Supply Voltage

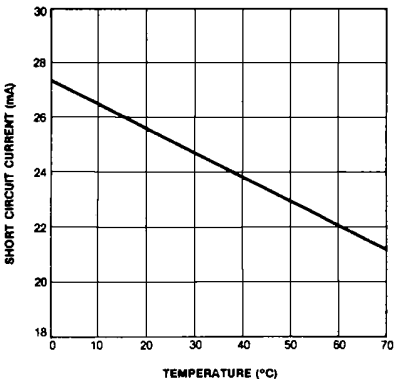

Figure 10. Output Short Circuit Current vs Ambient Temperature

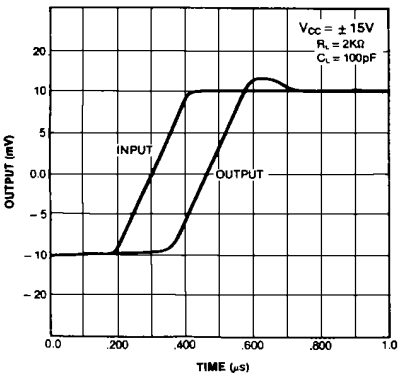

Figure 11. Transient Response

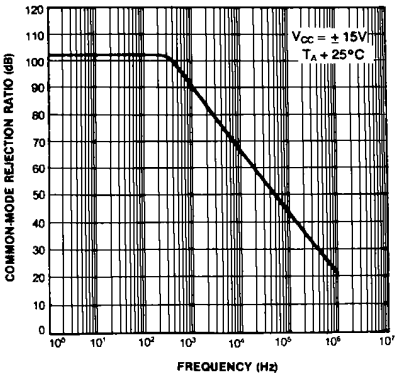

Figure 12. Common-Mode Rejection Ratio vs Frequency

Typical Performance Characteristics (continued)

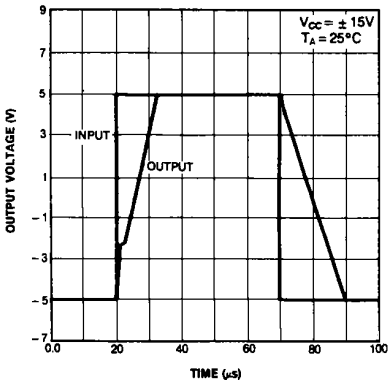

Figure 13. Voltage Follower Large Signal Pulse Response

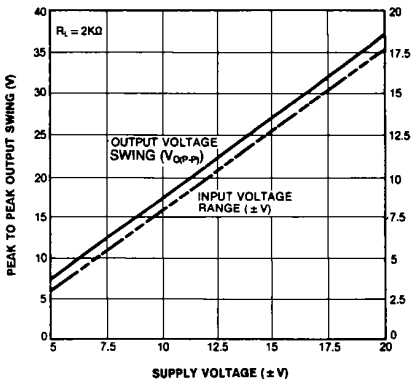

Figure 14. Output Swing and Input Range vs Supply Voltage

Mechanical Dimensions

Package

8-DIP

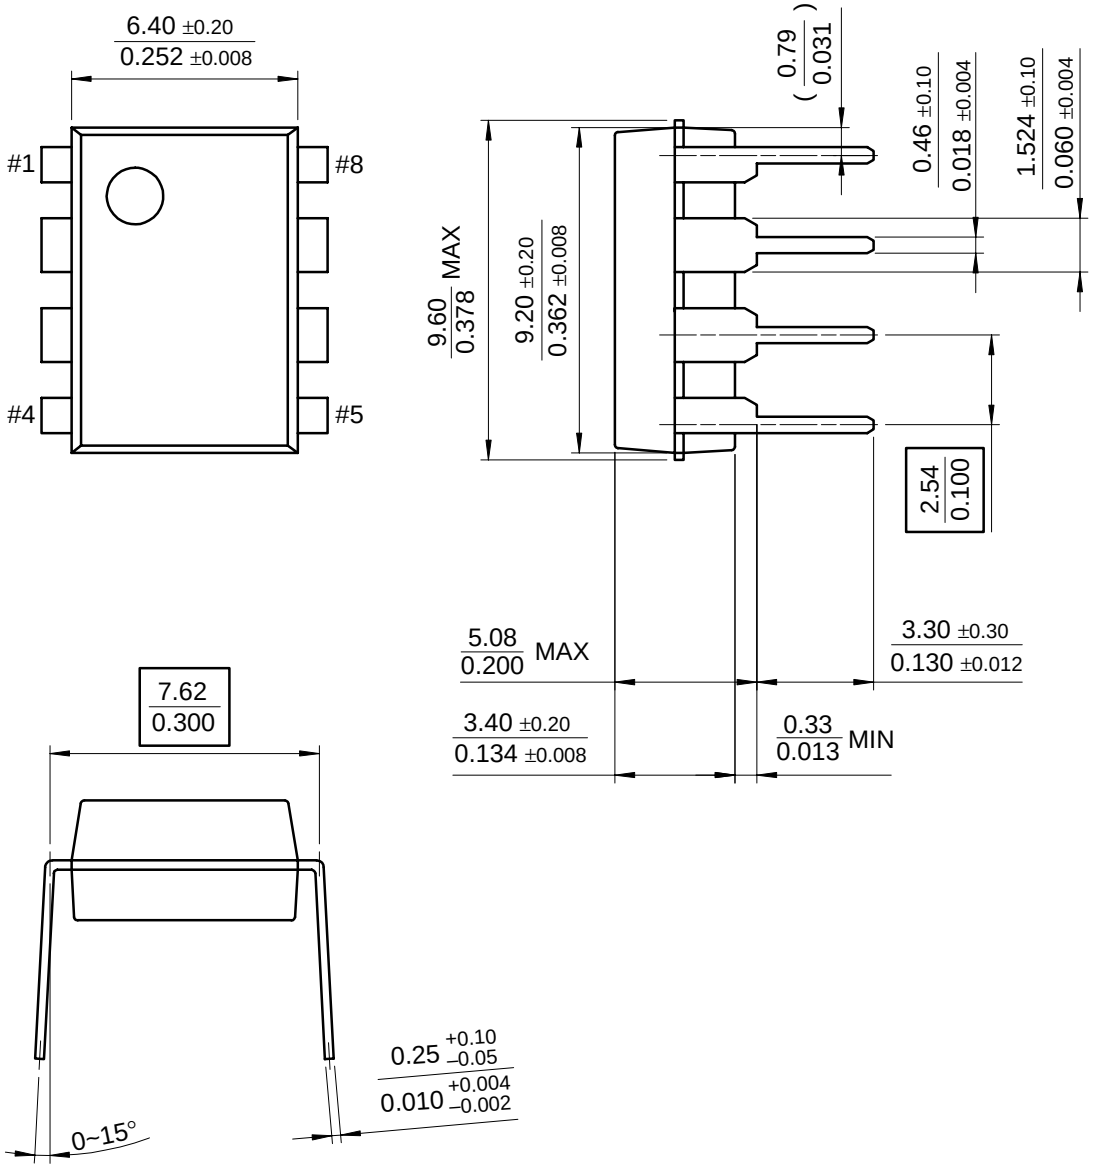

Mechanical Dimensions (Continued)

Package

8-SOP

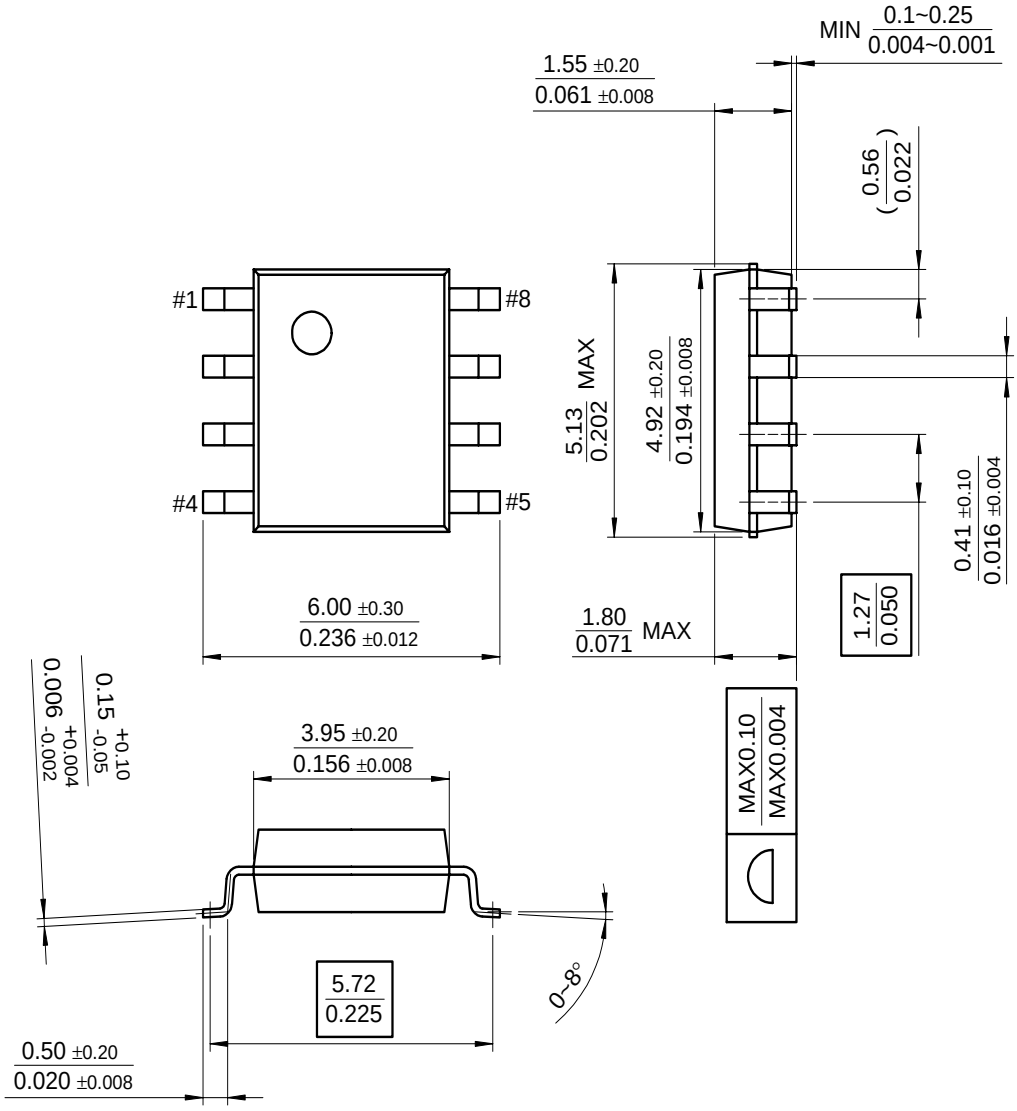

Ordering Information

Product Number	Package	Operating Temperature
LM741CN	8-DIP	0 ~ + 70°C
LM741CM	8-SOP	
LM741IN	8-DIP	-40 ~ + 85°C

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

© 2001 Fairchild Semiconductor Corporation