CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED

PART NUMBER	"A"	"B"	LEAD " A" COLOR	LEAD "B" COLOR
MAHC0001ZXJ	127.0 ±5.0	127.0 ±5.0	RED	RED

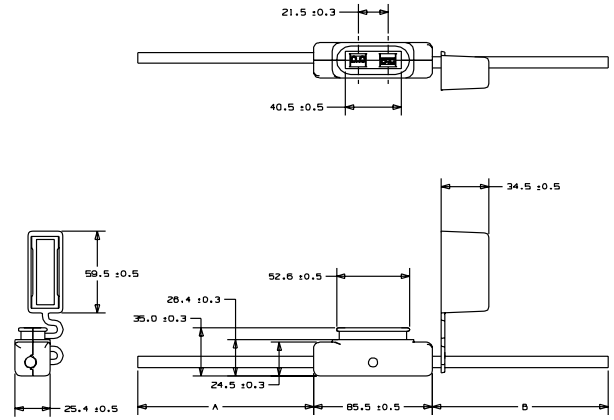

GENERAL NOTES:
1. COVER TETHER IS SLID ON EITHER WIRE LEAD, UP TO THE BODY.
2. FUSEHOLDER IS SHIPPED WITH COVER SNAPPED ONTO BODY.
3. RATING: MAX. 60A, 32 VDC AT A MAX. OPERATING TEMP OF 80°C.
4. INSULATING BODY: BLACK/PC
5. INSULATING COVER: BLACK/TPV
6. WIRE: BAWG, UL 1015, 105°C RATED

INSPECTION NOTES:
1. MOLDED BODY HALVES MUST FULLY SURROUND WIRE LEADS. NO VOIDS OR BARE CONDUCTORS TO BE VISIBLE.
2. NO DAMAGED WIRE INSULATION OR EXPOSED CONDUCTORS ARE PERMITTED.
3. NO SHORT SHOTS ON MOLDING.
4. CRIMP: MINIMUM 350N PULL FORCE.

METRIC
ASSEMBLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS.
UNLESS OTHERWISE SPECIFIED, ANGLES ARE ± 2 DEGREES.
UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

◎	DENOTES CRITICAL CHARACTERISTICS.
C,P,K	DENOTES CPK DIMENSIONS, MINIMUM CPK VALUE
ST	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. LITTELFUSE INSPECTION PROCEDURE FOR MEASUREMENT
CP	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE

BILL OF MATERIAL

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M

COPIES TO
MATL SPEC
FINISH

| | | |