NOTES: UNLESS OTHERWISE SPECIFIED

1. CONSTRUCTION:
   HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.
   AVAILABLE IN TEN COLORS.
   CONTACT BLADE: BERYLLIUM COPPER, GOLD PLATED
   PER MIL–G–45204 B TYPE 1
   0.00001" [0.000254] THK MINIMUM.
   SPRING: STAINLESS STEEL TYPE 302.

2. PERFORMANCE
   MAXIMUM CURRENT: 1.0 AMPS
   MAXIMUM VOLTAGE: 600 W.V.D.C.
   MAXIMUM TEMPERATURE: 200°F (93°C)

3. FEATURES:
   HOOK FITS COMPONENTS UP TO ø0.025" [0.64].
   PIN PERMITS CONNECTION TO 0.025" [0.64] SQ.
   OR ø0.030" [0.76] SOCKETS.

| REVISIONS | | | |
|---|---|---|---|
| LTR | DESCRIPTION | DATE | APPROVED |
| | | | |

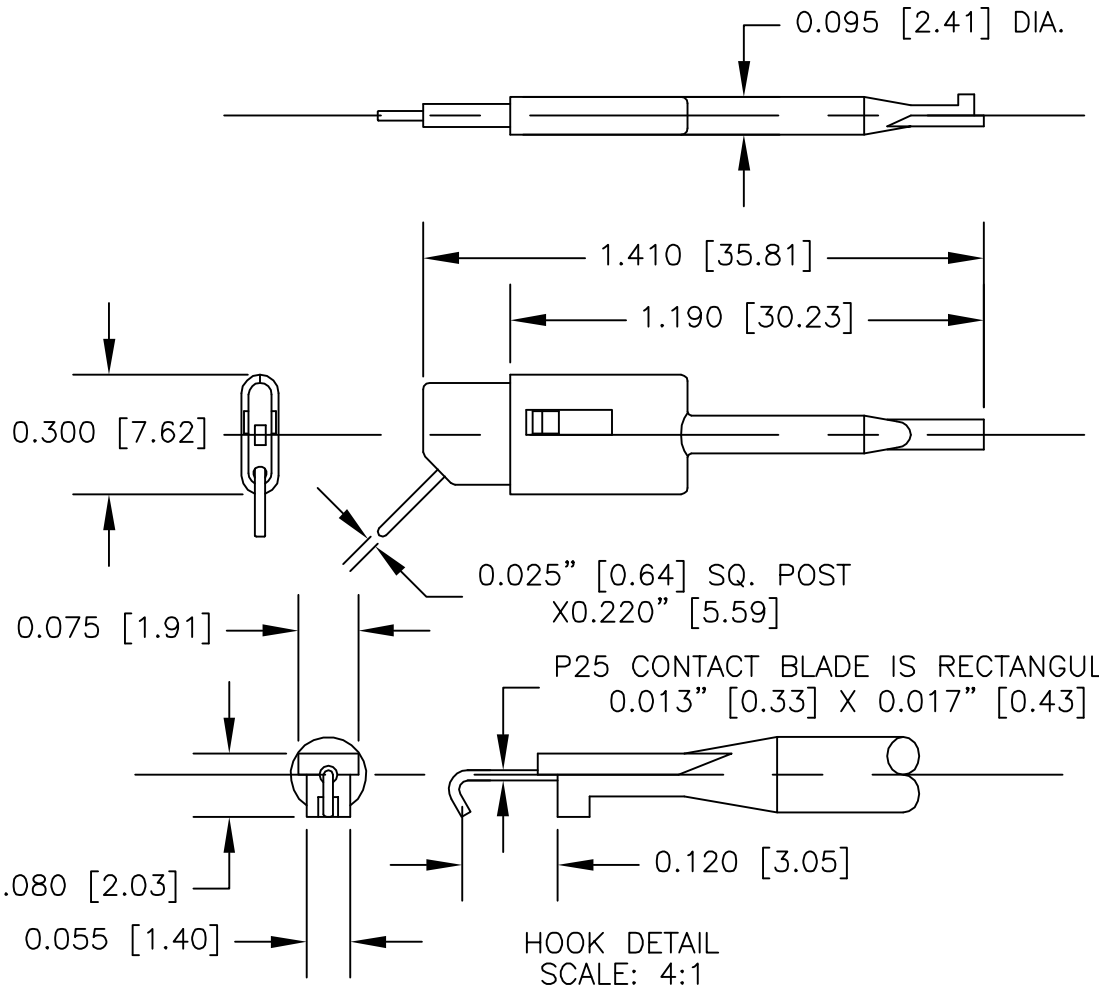



ACTUAL SIZE

| | | | | | |
|---|---|---|---|---|---|
| | | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS ± DECIMALS .XX ± .XXX ± ANGLES ± | CONTRACT NO. | E-Z-HOOK® DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A. | |
| | | | APPROVALS / DRAWN R.L. | DATE 6/09 | DESCRIPTION: PICO HOOK WITH 0.25 [6.35] POST GOLD PLATED |
| | | MATERIAL: SEE NOTE. | APPROVED BY | | |
| | | FINISH: SEE NOTE. | | | SIZE A / CODE IDENT NO. 08505 / DRAWING NO. P25COLOR / REV. |
| NEXT ASSY | USED ON | | | | |
| APPLICATION | | DO NOT SCALE DRAWING | | SCALE 2:1 | SHEET 1 OF 1 |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC.
MAXIMUM TESTED RATINS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.