HAMMOND MANUFACTURING

Quality Products. Service Excellence.

Type 4X Polyester Wallmount Enclosure *PHW Series*

Continuous Hinge Door with Twist Latches



Panel Sold Separately

Application

- These enclosures are specially designed to accomodate electrical, electronic, instrumentation and mechanical controls indoors and outdoors.
- For use where corrosion resistant watertight enclosures are needed to provide protection against windblown dust and rain, splashing and hose directed water.

Standards

- UL 508 1, 3, 3R, 4, 4X, 12
- CSA 1, 3, 3R, 4, 4X, 12
- Complies with
  - NEMA 1, 3, 3R, 4, 4X, 12
  - IEC 60529, IP 66

Construction

- Compression molded, fiberglass reinforced polyester.
- Memory retaining, continuous door gasket standard.
- Molded in panel mounting inserts (except where noted).
- Integral mounting feet.
- Stainless steel hardware.
- Padlocking provision.
- Stainless steel butterfly type "twist latch" door fasteners.
- ported with a continuous hinge.
- For corrosion resistance information, please refer to table in the Technical Information section.

Finish

- Fiberglass reinforced material is finished in light gray.

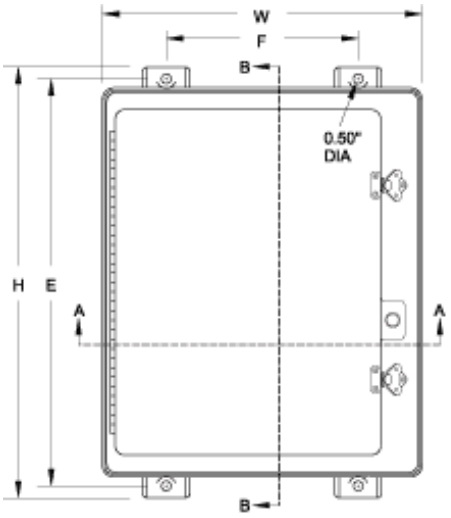

Front View

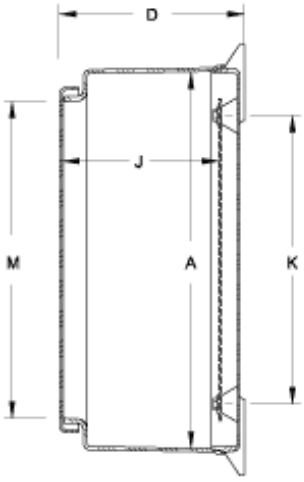

Section B-B



Section A-A

Part No.	Overall Dimensions H	W	D	Inside Dimensions A	B	Mounting Centers C	E	F	J	K	L	Enclosure Opening M	N	Opt. Panel Part No.	Ship Wt. (lbs)
PHW20166	22.75	16.87	7.77	19.70	16.04	7.24	21.50	10.12	6.26	15.25	11.25	16.75	12.19	**18P1713**	17
PHW20168	22.75	16.87	9.77	19.70	16.04	9.24	21.50	10.12	8.26	15.25	11.25	16.75	12.19	**18P1713**	22
PHW201610	22.75	16.87	11.77	19.70	16.04	11.24	21.50	10.12	10.26	15.25	11.25	16.75	12.19	**18P1713**	23
PHW201612	22.75	16.87	13.77	19.70	16.04	13.24	21.50	10.12	12.26	15.25	11.25	16.75	12.19	**18P1713**	24
PHW241210	26.95	13.72	11.99	24.00	12.87	11.33	25.75	6.25	10.33	19.25	7.25	21.00	8.37	**18P2109**	25
PHW24208	27.00	21.24	9.90	24.05	20.39	9.25	25.75	14.00	8.25	19.25	15.25	21.25	16.00	**18P2117**	32
PHW242410	27.00	25.25	11.90	24.05	24.39	11.25	25.75	17.87	10.25	19.25	19.25	21.25	20.00	**18P2121**	42
PHW30208	32.86	20.99	9.89	29.90	20.14	9.23	31.75	14.25	8.23	25.25	15.25	27.00	16.50	**18P2717**	36
PHW302010	32.86	20.99	11.89	29.90	20.14	11.23	31.75	14.25	10.23	25.25	15.25	27.00	16.50	**18P2717**	39
PHW30247	33.41	26.32	8.81	30.46	25.47	8.12	32.25	18.50	7.12	25.25	19.25	27.38	21.25	**18P2721**	45
PHW302410	33.41	26.32	11.95	30.46	25.47	11.27	32.25	18.50	10.27	25.25	19.25	27.38	21.25	**18P2721**	50
PHW302412	33.41	26.32	13.79	30.46	25.47	13.10	32.25	18.50	12.10	25.25	19.25	27.38	21.25	**18P2721**	54
PHW363010	39.31	32.50	12.05	36.31	31.69	11.36	38.13	23.88	10.36	31.25	25.25	33.25	27.25	**18P3327**	78
PHW363012	39.31	32.50	14.05	36.31	31.69	13.36	38.13	23.88	12.36	31.25	25.25	33.25	27.25	**18P3327**	81
PHW483616	51.29	36.62	17.93	48.33	36.22	17.25	50.12	29.25	16.25	43.25	31.25	45.25	32.00	**18P4533**	108
PHW603616	63.50	36.50	18.12	60.13	36.13	17.44	62.25	28.50	16.44	53.06	31.00	55.75	32.00	**18P5733**	155

Data subject to change without notice

© 2015. Hammond Manufacturing Ltd. All rights reserved.