NOTES

MATERIAL-ALUMINUM DIE-CAST: G AI SI 12 / DIN 1775
LID SCREWS-CAPTIVE STAINLESS STEEL
EMI/RFI GASKET IS NOT REQUIRED AS LID TO BOX CONNECTION IS INSIDE THE GASKET SEAL.
DEGREE OF PROTECTION NEMA 4X, IP66
NEOPRENE OIL AND PETROL RESISTANT-THERMOPLASTIC GASKET (-40 C TO +120 C)
TEXTURED POLYESTER POWDER COAT, GREY RAL 7032

LID

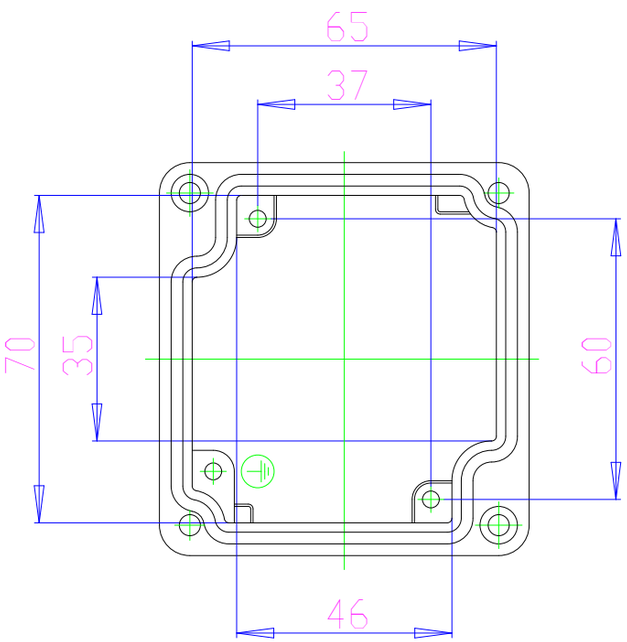

BOTTOM

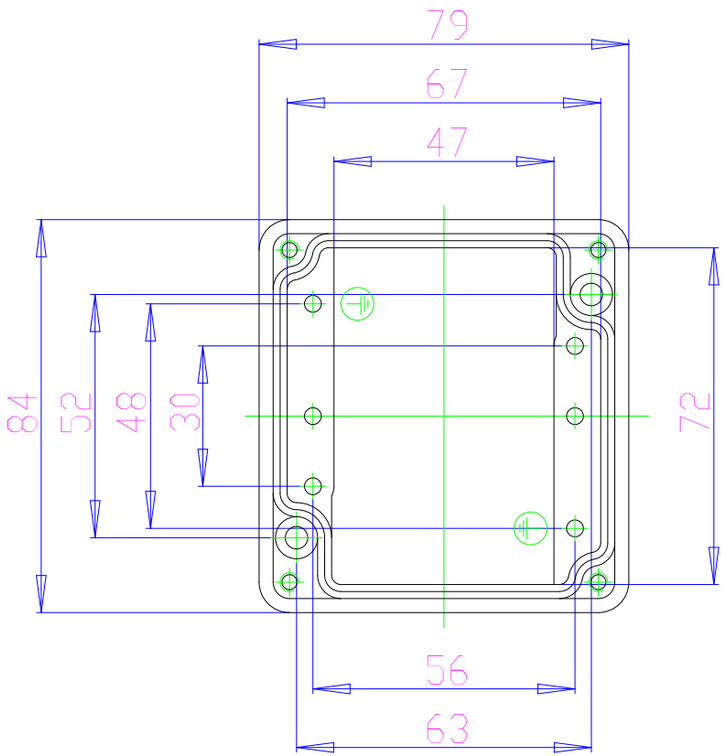

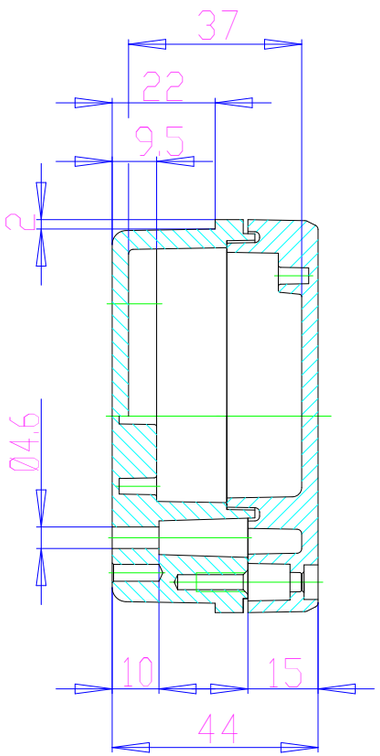

For the best fit print on legal size paper.

THIS DRAWING IS PROPRIETARY INFORMATION OF HAMMOND MFG.CO.LTD. NOT TO BE USED WITHOUT EXPRESSED WRITTEN PERMISSION OF HAMMOND MFG.CO.LTD.

Rev	ECN.	Description		Date	
△	N/A	RELEASE	----	03 01 03	MJM
B					

Dwn	M. MERCER
Date	03 01 03
Chk	---
Mat'l	DIE-CAST ALUMINUM
Sheet	1 o 1

HAMMOND MANUFACTURING CO. LTD.
Electronics Group, Waterloo, Ont. - Cheektowaga, NY

ROLEC conFORM SERIES ENCLOSURES

Part#: R111-081-000 Dwg: EKF 081