Rubber Foot CK-Type

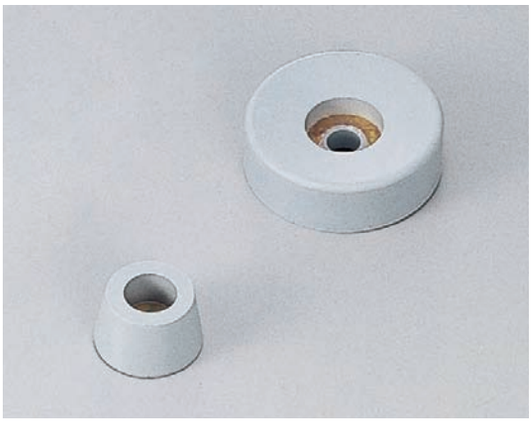

■Characteristic

Stain transfer resistance is improved compared with ordinary products.
Available with stain transfer index of grade 4.

■Application

Medical instruments/
Physical and Chemical devices/
Measuring instruments

■Specification

Hardness: 60±5°
Stain transfer index: CK-Type···Grade 3
K-Type···Grade 2

■Note

Actual results may vary depending on the contact surface and environment.
1. Test method: JIS K-6403 Appendix
2. Test plate: White Paint Board
3. Evaluation: JIS L-0805 Gray Scale for Assessing Staining

■Parts List

No.	Part Name	Material	Finish	Quantity
1	Rubber Foot	SBR(Styrene Butadiene Rubber)	Gray	1
2	Washer	SPCC	Zn	1

Model No.	Recommended Screw	Recommended Screw Torque mN·m(kgf·cm)	Allowable Maximum load N(kgf)	A	B	C	D	E	F	G	H	Net Weight (g)	Code No.
CK-5	M3 Pan Head	59(0.6)	75 (7.6)	16	9	13	3	8	6	R1	t0.8	2.1	7325
CK-7	M3 Pan Head	29(0.3)	30 (3.1)	10	8	9		6	5		t0.5	0.7	7327
CK-11	M3 Pan Head	39(0.4)	40 (4.1)	12	6	10			3			0.8	7331
CK-12	M5 Pan Head	147(1.5)	220(22.4)	30	9		5.2	12	5		t0.8	8.5	7332
CK-17	M4 Pan Head	147(1.5)	150(15.3)	20	8		4.5	9.5	4			3.7	7337

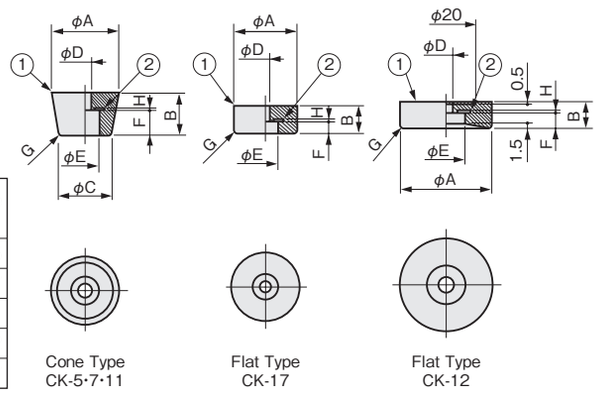

Cone Type CK-5·7·11 | Flat Type CK-17 | Flat Type CK-12

Rubber Foot UK-Type

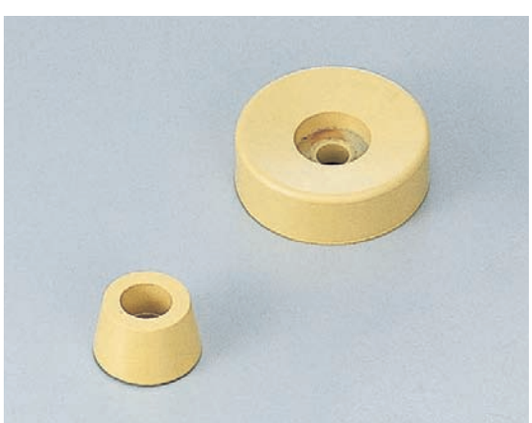

■Characteristic

It uses UL standard approved material.
It can be used as a part of devices for export.

■Application

Medical instruments /
Physical and Chemical devices /
Measuring instruments

■Specification

Hardness: 60±5°
Fire resistance: 94V-0 (UL Standard)

■Parts List

No.	Part Name	Material	Finish	Quantity
1	Rubber Foot	CR(Styrene Butadiene Rubber)	Yellow	1
2	Washer	SPCC	Zn	1

Model No.	Recommended Screw	Recommended Screw Torque mN·m(kgf·cm)	Allowable Maximum Torque N(kgf)	A	B	C	D	E	F	G	H	Net Weight (g)	Code No.
UK-5	M3 Pan Head	59(0.6)	75 (7.6)	16	9	13	3	8	6	R1	t0.8	2.2	7305
UK-7	M3 Pan Head	29(0.3)	30 (3.1)	10	8	9		6	5		t0.5	0.7	7307
UK-11	M3 Pan Head	39(0.4)	40 (4.1)	12	6	10			3			0.9	7311
UK-12	M5 Pan Head	147(1.5)	220(22.4)	30	9		5.2	12	5		t0.8	9.1	7312
UK-17	M4 Pan Head	147(1.5)	150(15.3)	20	8		4.5	9.5	4			3.9	7317

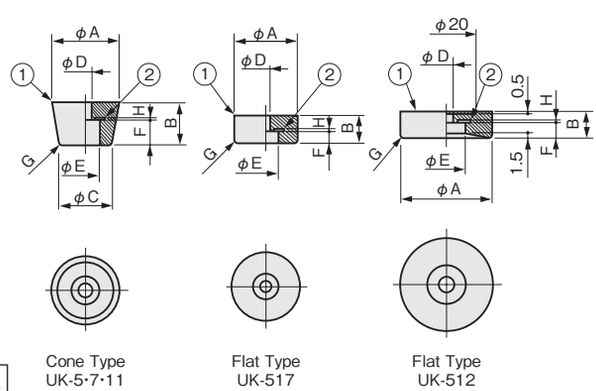

Cone Type UK-5·7·11 | Flat Type UK-517 | Flat Type UK-512