# Connectors, Adapters, and Tools

| Model | Name | Use With: |
|---|---|---|
| 213-CON | Analog Output Connector | Instruments with 12-pin analog connectors |
| 237-BAN-3A | Triax to Banana Plug | 4200-SCS, 7072, 7072-HV, DMMs |
| 237-BNC-TRX | 3-Lug Female Triax to Male BNC Connector with guard disconnected | 237, 4200-SCS, 6517A, 6517B, 7078-TRX cables |
| 237-TRX-BAR | 3-Lug Triax Female to Female Barrel Adapter | 2635, 2635A, 2636, 2636A, 4200-SCS, Triax interconnect |
| 237-TRX-NG | Triax Male-Female Adapter with guard disconnected | 237, 6517A, 6517B, 7072, 7072-HV |
| 237-TRX-T | 3-slot Male to Dual 3-Lug Female Triax Tee Adapter | 4200-SCS, 7072, 7072-HV, 7078-TRX cables |
| 237-TRX-TBC | 3-Lug Female Triax Bulkhead Connector | 7072, 7072-HV, 7078-TRX cables |
| 2182-325A | Silver Solder for use with 2182-KIT | 2182A |
| 2182-KIT | Low-Thermal Connector with Strain Relief (LEMO) | 2182A, SC-93 |
| 2188 | Low-Thermal Calibration Shorting Plug | 2182A |
| 2499-DIGIO | Digital I/O Expansion Module | SourceMeter instruments |
| 2500INT-SMA | SMA Connector | 2500INT integrating sphere |
| 2500INT-FC/PC | FP/PC Connector | 2500INT integrating sphere |
| 2500INT-FC/APC | FP/APC Connector | 2500INT integrating sphere |
| 2600-IAC | Safety Interlock Adapter Connector | 2611, 2612, 2635, 2636, 2611A, 2612A, 2635A, 2636A |
| 2600-KIT | Screw Terminal Connector with Strain Relief and Cover | 2601, 2602 (2 needed), 2611, 2612 (2 needed), 2601A, 2602A (2 needed), 2611A, 2612A (2 needed) |
| 2600-TRIAX | 3-Lug Triax Adapter | 2601, 2602 (2 needed), 2611, 2612 (2 needed), 2601A, 2602A (2 needed), 2611A, 2612A (2 needed) |
| 3706-BKPL | Analog Backplane Extender Board | 3706 |
| 3720-ST | Screw Terminal Block | 3720 |
| 3721-ST | Screw Terminal Block | 3721 |
| 3723-ST | Screw Terminal Block | 3723 |
| 3723-ST-1 | Screw Terminal Block | 3723 |
| 3724-ST | Screw Terminal Block | 3724 |
| 3730-ST | Screw Terminal Block | 3730 |
| 3731-ST | Screw Terminal Block | 3731 |
| 3740-ST | Screw Terminal Block | 3740 |
| 3750-ST | Screw Terminal Block | 3750 |
| 3790-KIT50-R | 50-pin Female D-sub Connector Kit | 3721, 3730, 3731, 3740, 3750 |
| 3791-CIT | Contact Insertion and Extraction Tool | 3720, 3722, 3723 |
| 3791-KIT78-R | 78-pin Female D-sub Connector Kit | 3720, 3723, 3724 |
| 3792-KIT104-R | 104-pin Male D-sub Connector Kit | 3722 |
| 3792-KIT104-R/F | 104-pin Female D-sub Connector Kit | 3722 |
| 4851 | BNC Shorting Plug | Instruments with BNC connectors |
| 6171 | 3-slot Male to 2-Lug Female Triax Adapter | 2-lug triax connectors |
| 6172 | 2-slot Male to 3-Lug Female Triax Adapter | 7065, 2500INT |

| Model | Name | Use With: |
|---|---|---|
| 7001-PNL | Metal Plate | 7001 |
| 7011-KIT-R | Female 96-pin Connector Kit | 7011-C, 7012-C, 7013-C, 7015-C, 7018-C |
| 7011-MTR | Bulkhead Mount 96-pin Male Connector | 7011-KIT-R, 7011-C, 7012-C, 7013-C, 7015-C, 7018-C |
| 7011-ST | Extra Screw Terminal Board | 7011-S |
| 7012-ST | Extra Screw Terminal Board | 7012-S |
| 7013-ST | Extra Screw Terminal Board | 7013-S |
| 7014-ST | Extra Screw Terminal Board | 7014 |
| 7015-ST | Extra Screw Terminal Board | 7015-S |
| 7018-ST | Extra Screw Terminal Board | 7018-S |
| 7072-TRT | Triax Removal Tool | 707B, 708B |
| 7074-CIT | Contact Extraction Tool | 7152-KIT, 7152-MTR |
| 7074-HCT | Hand Crimping Tool | 7152-KIT, 7152-MTR |
| 7078-CIT | Contact Insertion/Extraction Tool | 7078-KIT, 7078-MTR, 7152-KIT, 7152-MTR |
| 7078-HCT | Hand Crimping Tool for 7078-KIT, 7169-KIT | 7078-KIT |
| 7078-KIT | Connector Kit | 7071, 7071-4, 7074-D, 7078-MTR |
| 7078-MTR | Mass Terminated Receptacle, Bulkhead Mount | 7071, 7071-4, 7078-KIT, 7078-MTC |
| 7078-TRX-BNC | 3-slot Male Triax to BNC Adapter | 486, 487, 4210-CVU, 4801, 6514, 6517A, 6517B, 7072, 7072-HV |
| 7078-TRX-GND | 3-slot Male Triax to BNC Adapter (guard removed) | 237, 4200-SCS, 4801, 6517A, 6517B, 7051, 7072, 7072-HV, Series 2600, Series 2600A |
| 7078-TRX-TBC | 3-Lug Female Triax Bulkhead Connector w/Cap | 7078-TRX cables |
| 7152-HCT | Hand Crimp Tool for 7152-KIT, 7152-MTR | 7152-KIT, 7152-MTR |
| 7152-KIT | 6-Position M-Series Plug w/Contacts | 7152, 7152-MTR |
| 7152-MTR | 6-Position M-Series Receptacle w/Sockets | 7152, 7152-KIT, 7152-MTC-2, 7152-MTC-10 |
| 7703-306A | DB50 Male Connector Kit | 7701, 7703, 7705, 7709 |
| 7709-308A | DB25 Male Connector Kit | 7701, 7707, 7709 |
| 7712-SMA-N | Female SMA to Male N-Type Adapter | 7711, 7712 |
| 7755 | 50Ω Feed-Through Terminator | RG 58 cable, 776, 3390 |
| 7788 | 50-pin D Subconnector Kit | 7703, 7705, 77XX, modules with D sub connectors |
| 7789 | 50-pin Male and 25-pin Male D-Shell Connector Kit | 7701, 7709 |
| 7790 | 50-pin Male, 50-pin Female, and 25-pin Male IDC D-Shell Connector Kit | 7701, 7703, 7705, 7707, 7709 |
| 8610 | Low Thermal Shorting Plug | 2000, 2001, 2002, 2010 |
| 8620 | 4-Wire DMM Shorting Plug | 2000, 2001, 2002, 2010, 2015, 2016, Series 2400, Series 2700, Series 3700 |
| 8680 | RTD Probe Adapter | 2001, 2002, 2010 |

# Connectors, Adapters, and Tools

| Model | Name | Use With: |
|---|---|---|
| BG-18 | Dual Banana to BNC Coaxial Adapter | 230, Series 2000, Series 2400, 2700, 2750 |
| CAP-18 | Protective Shield/Cap | BNC, 2-lug triax connectors |
| CAP-31 | Protective Shield/Cap | 3-lug triax connectors |
| CS-400 | DB25 Male Solder Cup | CA-126-1 cable, 213 |
| CS-458 | Interlock Connector Kit | 6517-ILC-3 |
| CS-565 | BNC Barrel, 4200-SCS | BNC interconnect |
| CS-630 | 3-Lug Female Triax Bulkhead Connector | 6487, 6517A, 6517B |
| CS-631 | 3-Lug Male Triax Cable Mount Connector | 4200-SCS, SC-22 cable |
| CS-701 | BNC Tee Adapter (Female-Male-Female) | 4200-SCS |
| CS-719 | 3-Lug Triax Jack Receptacle | 4200-SCS |
| CS-846 | Screw Terminal Test Lead Connector | 230X, 2510, 2510-AT |
| CS-970 | High Voltage Bulkhead Connector | 248, 248-SHV cable |

| Model | Name | Use With: |
|---|---|---|
| CS-1247 | SMA Female to BNC Male Adapter | 4200-SCS |
| CS-1249 | SMA Female to SMB Plug Adapter | 4200-SCS |
| CS-1251 | BNC Female to SMB Plug Adapter | 4200-SCS |
| CS-1252 | SMA Male to BNC Female Adapter | 4200-SCS |
| CS-1281 | SMA Female to SMA Female Adapter | 4200-SCS |
| CS-1305 | Interlock Connector | 6517B |
| CS-1382 | Female MMBX Jack to Male SMA Plug Adapter | 4200-SCS |
| CS-1390 | Male LEMO Triax to Female SMA Adapter | 4200-SCS |
| CS-1391 | SMA Tee Adapter (Female-Male-Female) | 4200-SCS |
| CS-1423-3 | Miniature Mating Connector | 2635, 2636, 2635A, 2636A |
| CS-1479 | SMA Male to BNC Male Adapter | 4200-SCS |
| TL-24 | SMA Torque Wrench | 4200-SCS, System 46, System 46T |

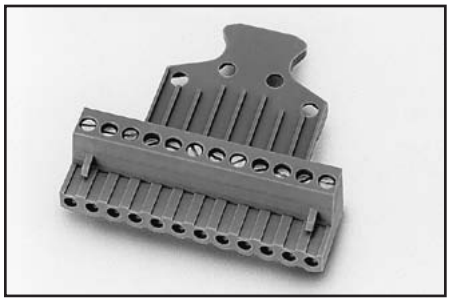

**Model 213-CON Analog Output Connector:** Quick disconnect analog output connector for Model 213 Quad Voltage Source. Screw terminals provided for connection of test leads.

**For use with: Instruments with 12-pin analog connectors**

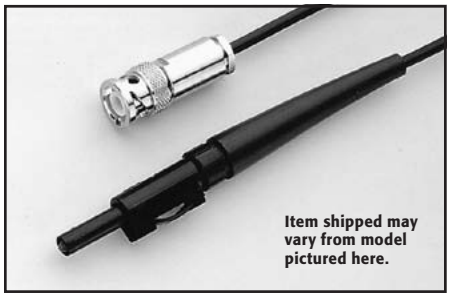


**Model 237-BAN-3A Triax to Banana Plug:** Triax cable center conductor terminated in a safety banana plug (guard and shield open). For connecting DMMs and other banana jack instruments to a matrix or fixture.

**For use with: 4200-SCS, 7072, 7072-HV, DMMs**

**Model 237-BNC-TRX:** Male BNC to 3-lug female triax adapter (guard disconnected). Terminates triax cable in BNC plug. High voltage rating for use with 237 and 7072-HV.

**For use with: 237, 4200-SCS, 6517A, 6517B, 7078-TRX cables**

**Model 237-TRX-BAR:** 3-lug triax barrel (female to female) for use with triax interconnect.

**For use with: 2635, 2635A, 2636, 2636A, 4200-SCS, triax interconnect**

**Model 237-TRX-NG:** 3-slot triax to 3-lug female triax adapter (guard removed) for non-guarded measurements. High voltage rating for use with 237, 7072-HV, etc.

**For use with: 237, 6517A, 6517B, 7072, 7072-HV**

**Model 237-TRX-T:** 3-slot male to dual 3-lug female triax tee adapter for use with 7078-TRX cables and 7072/7072-HV Semiconductor Matrix Cards. High voltage rating for use with Models 237 SMU and 6517B Electrometer.

**For use with: 237, 4200-SCS, 6517A, 6517B, 7072, 7072-HV, 7078-TRX cables**

# Connectors, Adapters, and Tools

**Model 237-TRX-TBC:** 3-lug female triax bulkhead connector with cap for assembly of custom panels and interface connections. High voltage rating for use with 237, 7072-HV, etc. Uses miniature coax cable, not triax cable, at soldered end. Bulkhead is outer shield.

**For use with: 7072, 7072-HV, 7078-TRX cables**

**Model 2182-325A:** Silver solder for making connections in experiments with the Model 2182A. 20 ft roll.

**For use with: 2182A**

**Model 2182-KIT Low-Thermal Connector with Strain Relief:** Connector kit for building a custom input cable for the Model 2182A Nanovoltmeter. Includes a low-thermal (LEMO) connector and a strain relief.

**For use with: 2182A, SC-93**

**Model 2188 Low-Thermal Calibration Shorting Plug:** A low-resistance, low-thermal shorting plug required to calibrate the Model 2182A Nanovoltmeter. Made of a LEMO connector with its pin connectors shorted together using copper wire and Sn/Ag4 silver solder.

**For use with: 2182A**

**Model 2499-DIGIO:** Digital I/O expansion module that plugs onto the DB-9 connector of a SourceMeter® instrument. Expands the three digital I/O lines of the SourceMeter to 16 lines. The SOT, EOT/BUSY, 5V, GND, and Interlock signals are passed through.

**Services Available:** 1-year factory warranty extended to 3 years from date of shipment

**For use with: SourceMeter Instruments**

**Model 2500INT-FC/APC:** FC/APC connector for 2500-INT Integrating Sphere.

**For use with: 2500-INT**

**Model 2500INT-FC/PC:** FC/PC connector for 2500-INT Integrating Sphere.

**For use with: 2500-INT**

**Model 2500INT-SMA:** SMA connector for 2500-INT Integrating Sphere.

**For use with: 2500-INT**

**Model 2600-IAC:** Safety interlock adapter connector.

**For use with: 2611, 2612, 2635, 2636, 2611A, 2612A, 2635A, 2636A**

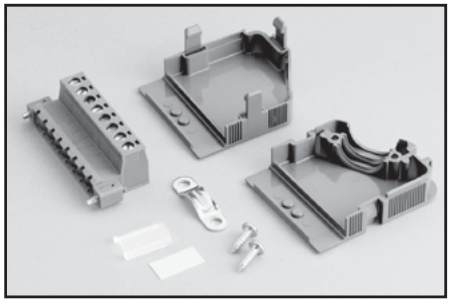

**Model 2600-KIT:** Extra screw terminal connector, strain relief, and cover for a single SourceMeter channel (two needed for use with Models 2602, 2612, 2602A, and 2612A).

**For use with: 2601, 2602, 2611, 2612, 2601A, 2602A, 2611A, 2612A**

# Connectors, Adapters, and Tools

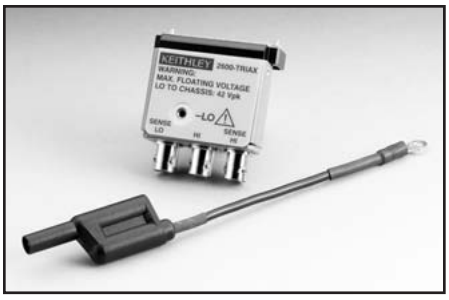


**Model 2600-TRIAX:** Triax adapter for a single Series 2600 or 2600A SourceMeter channel (two needed for use with Models 2602, 2602A, 2612, and 2612A). For use with standard 3-lug triax cables.

**For use with: 2601, 2602, 2611, 2612, 2601A, 2602A, 2611A, 2612A**

**Model 3706-BKPL:** Analog backplane extender board, 15-pin D-sub to terminal block.

**For use with: Series 3700**

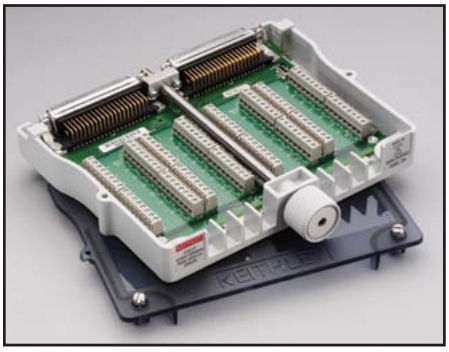

**Model 3720-ST:** Screw Terminal Block. Required with the Model 3720 for automatic CJC thermocouple measurements.

**For use with: 3720**

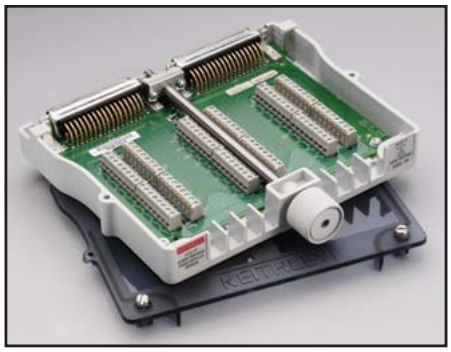

**Model 3721-ST:** Screw Terminal Block. Required with the Model 3721 for automatic CJC thermocouple measurements.

**For use with: 3721**

**Model 3723-ST:** Screw Terminal Block. Accessory for Model 3723 for two-pole applications.

**For use with: 3723**

**Model 3723-ST-1:** Screw Terminal Block. Accessory for the Model 3723 for single-pole applications.

**For use with: 3723**

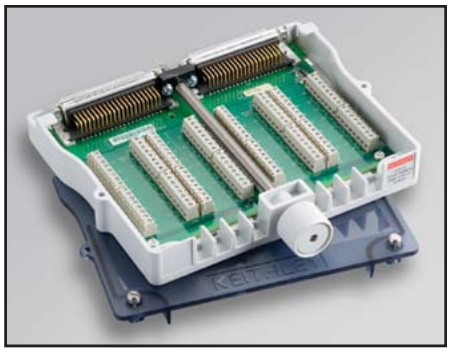

**Model 3724-ST:** Screw Terminal Block.

**For use with: 3724**

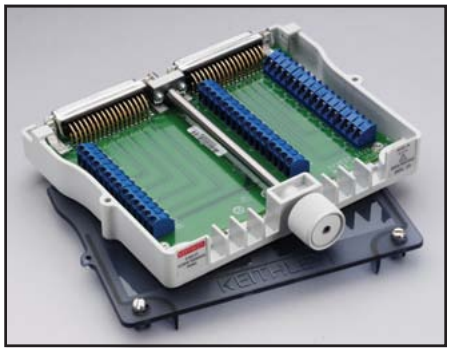

**Model 3730-ST:** Screw Terminal Block.

**For use with: 3730**

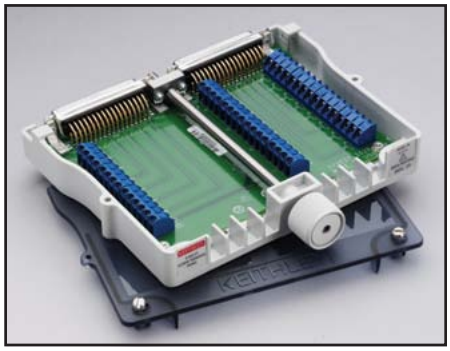

**Model 3731-ST:** Screw Terminal Block.

**For use with: 3731**

# Connectors, Adapters, and Tools

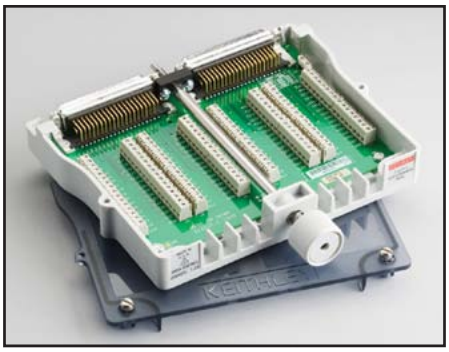

**Model 3732-ST-C:** Screw Terminal Block. Enables screw terminal access and additional matrix sizes including: quad 4×28 (1W), dual 4×28 (2W), single 4×56 (2W), dual 4×56 (1W), and single 4×112 (1W).

**For use with: 3732**

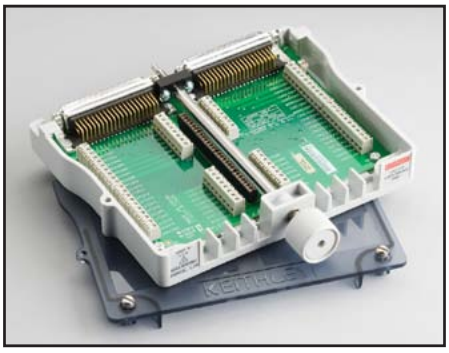

**Model 3732-ST-R:** Screw Terminal Block. Enables screw terminal access and additional matrix sizes including: dual 8×28 (1W), single 8×28 (2W), and single 16×28 (1W).

**For use with: 3732**

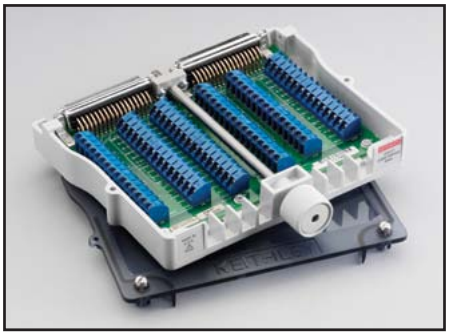

**Model 3740-ST:** Screw Terminal Block.

**For use with: 3740**

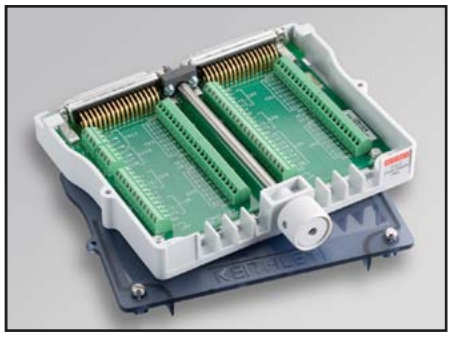

**Model 3750-ST:** Screw Terminal Block.

**For use with: 3750**

**Model 3790-KIT50-R:** 50-pin female D-sub connector kit that contains two female D-sub connectors and 100 solder cup contacts. Use for assembly of custom cable and harnesses compatible with Series 3700 plug-in cards.

**For use with: 3721, 3730, 3731, 3740, 3750**

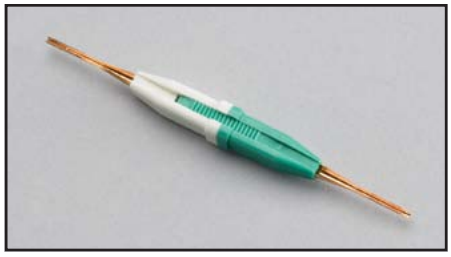

**Model 3791-CIT:** Contact insertion and extraction tool for assembly and maintenance of Series 3700 D-sub Connector kits.

**For use with: 3791-KIT78-R, 3791-KIT104-R**

**Model 3791-KIT78-R:** 78-pin female D-sub connector kit that contains two female D-sub connectors and 156 solder-cup contacts. Use for assembly of custom cable and harnesses compatible with Series 3700 plug-in cards.

**For use with: 3720, 3723, 3724**

**Model 3792-KIT104-R:** 104-pin male D-sub connector kit that contains two male D-sub connectors with housings and 208 solder-cup contacts. Use for assembly of custom cable and harnesses compatible with Series 3700 plug-in cards.

**For use with: 3722**

**Model 3792-KIT104-R/F:** 104-pin female D-sub connector kit that contains two female D-sub connectors with housings and 208 solder-cup contacts. Use for assembly of custom cables, harnesses, and DUT interface compatible with Series 3700 plug-in cards.

**For use with: 3722**

# Connectors, Adapters, and Tools

**Model 4851:** BNC shorting plug.

**For use with instruments with BNC connectors**

**Model 6171:** 3-slot male to 2-lug female triax adapter.

**For use with: 2-lug triax connectors**

**Model 6172:** 2-slot male to 3-lug female triax adapter. For use in adapting Models 7065 and 250INT inputs to 3-slot triax plugs.

**For use with: 7065, 2500INT**

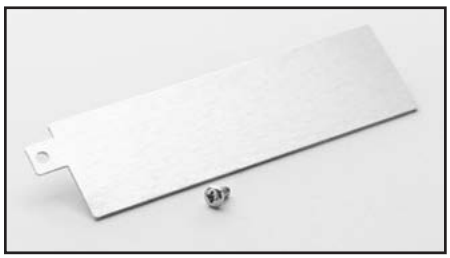

**Model 7001-PNL:** Metal plate used to cover an empty card slot on the rear panel of a Model 7001.

**For use with: 7001**

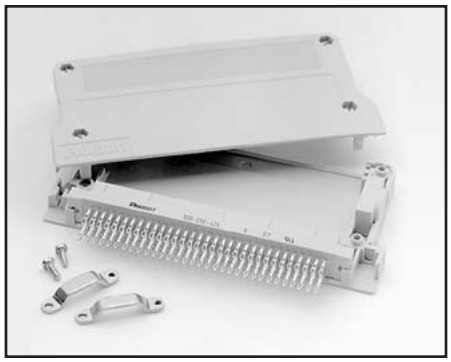

**Model 7011-KIT-R:** 96-pin female DIN connector with solder eyelets and strain relief. This kit can be used for assembly of custom cables to connect with the connectors on the 7011-C, 7012-C, 7013-C, 7015-C, and 7018-C switch cards. Also connects with the 7011-MTR bulkhead mount male connector.

**For use with: 7011-C, 7012-C, 7013-C, 7015-C, 7018-C**

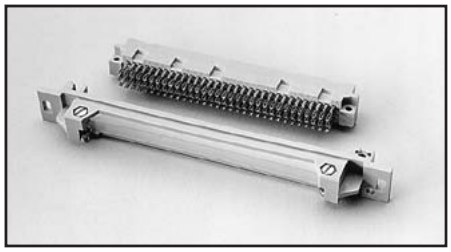

**Model 7011-MTR:** 96-pin male DIN connector with solder eyelets for bulkhead mount. Connects with the 7011-KIT-R and the 7011-MTC-2.

**For use with: 7011-KIT-R, 7011-C, 7012-C, 7013-C, 7015-C, 7018-C**

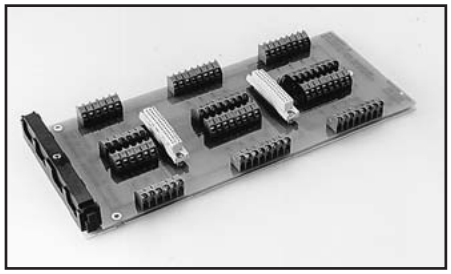

**Model 7011-ST:** Extra quick disconnect screw terminal board. One 7011-ST is included with each 7011-S.

**For use with: 7011-S**

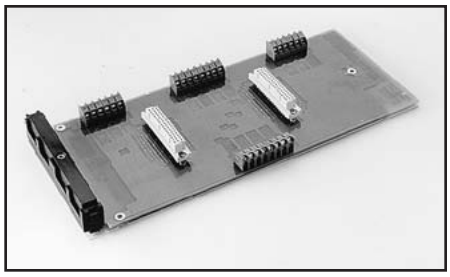

**Model 7012-ST:** Extra quick disconnect screw terminal board. One 7012-ST is included with each 7012-S.

**For use with: 7012-S**

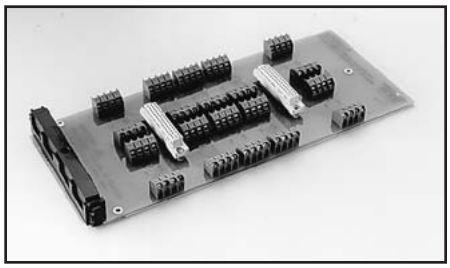

**Model 7013-ST:** Extra quick disconnect screw terminal board. One 7013-ST is included with each 7013-S.

**For use with: 7013-S**

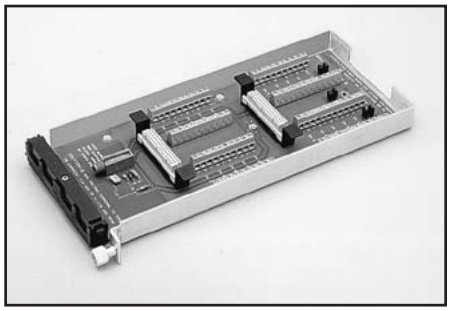

**Model 7014-ST:** Extra quick disconnect isothermal screw terminal board with cold junction sensor. One 7014-ST is included with each 7014.

**For use with: 7014**

# Connectors, Adapters, and Tools

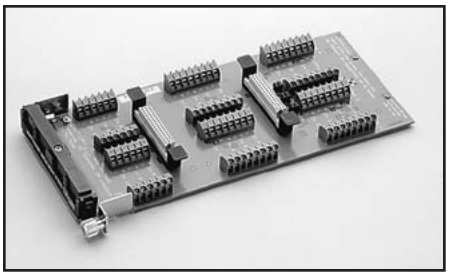

**Model 7015-ST:** Extra quick disconnect screw terminal board. One 7015-ST is included with each 7015-S.

**For use with: 7015-S**

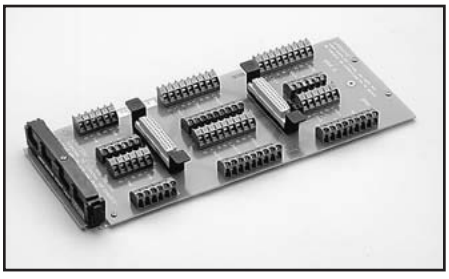

**Model 7018-ST:** Extra quick disconnect screw terminal board. One 7018-ST is included with each 7018-S.

**For use with: 7018-S**

**Model 7072-TRT:** Triax removal tool used to connect or disconnect triax style connectors when clearance is limited making it difficult to mate or unmate a connector with your fingers.

**For use with: 707B, 708B**

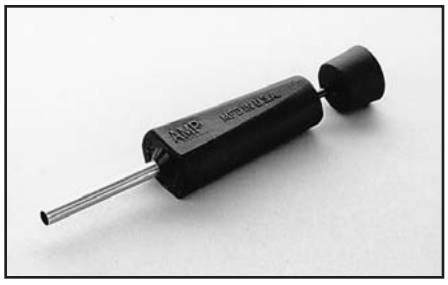

**Model 7074-CIT:** Contact extraction tool for removal of contacts from cables and connectors.

**For use with: 7152-KIT, 7152-MTR**

**Model 7074-HCT:** Contact crimping pliers for assembly of cables and connectors.

**For use with: 7152-KIT, 7152-MTR**

**Model 7078-CIT:** Contact insertion and extraction tool for assembly and maintenance of 7078-MTC cables and connectors.

**For use with: 7078-KIT, 7078-MTR, 7152-KIT, 7152-MTR**

**Model 7078-HCT:** Contact crimping pliers for assembly of cables and connectors using 7078-MTR or 7078-KIT.

**For use with: 7078-KIT**

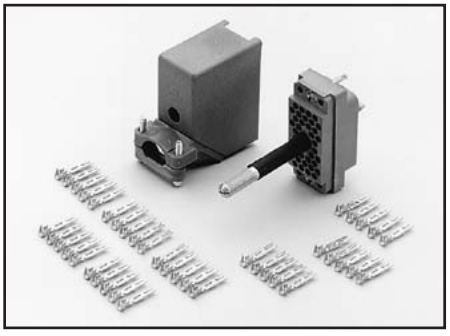

**Model 7078-KIT:** 38-pin male plug assembly with strain relief and 40 contacts for assembly of custom cable and harnesses compatible with Model 7071 8×12 Matrix Card, Model 7071-4 Dual 4×12 Matrix Card, and 7078-MTR Mass Terminated Receptacle. Requires 7078-HCT; recommend 7078-CIT.

**For use with: 7071, 7071-4, 7074-D, 7078-MTR**

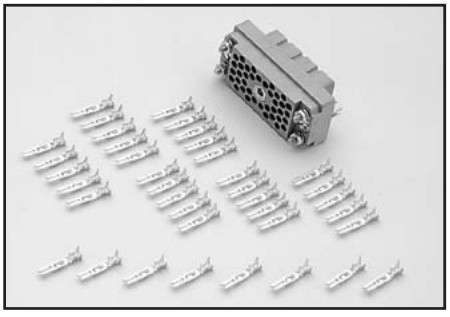

**Model 7078-MTR:** 38-pin female bulkhead mount receptacle with 40 contacts for custom interface and patch panels compatible with 7078-MTC and 7078-KIT. Requires 7078-HCT; recommend 7078-CIT.

**For use with: 7078-KIT, 7078-MTC, 7071, 7071-4**

# Connectors, Adapters, and Tools

**Model 7078-TRX-BNC:** 3-slot male triax to BNC adapter for use with 7072 Semiconductor Matrix Card and 4801 cables.

**For use with: 486, 487, 4210-CVU, 4687, 4801, 6514, 6517A, 6517B, 7072, 7072-HV**

**Model 7078-TRX-GND:** 3-slot male triax to female BNC adapter (guard removed) for adapting non-guarded measurements to the Model 237 SMU, 7072 or 7072-HV Semiconductor Matrix Cards, or 8006 or 8008 Test Fixtures.

**For use with: 237, Series 2600, Series 2600A, 4801, 6517A, 6517B, 7051, 7072, 7072-HV**

**Model 7078-TRX-TBC:** 3-lug female triax bulkhead connector with cap for assembly of custom panels and interface connections.

**For use with: 7078-TRX Cables**

**Model 7152-HCT:** Contact crimping pliers for assembly of cables and connector using 7152-MTR or 7152-KIT.

**For use with: 7152-KIT, 7152-MTR**

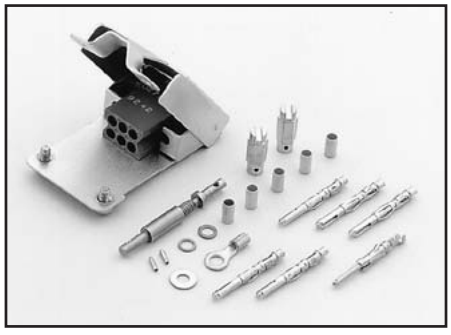

**Model 7152-KIT:** 6-pin plug assembly with strain relief and contacts for assembly of custom cable and harnesses compatible with Model 7152 4×5 Low Current Matrix Card and 7152-MTR Mass Terminated Receptacle. Requires 7152-HCT recommend 7074-CIT and 7074-HCT.

**For use with: 7152, 7152-MTR**

**Model 7152-MTR:** 6-pin bulkhead mount receptacle with contacts for custom interface and patch panels compatible with 7152-MTC and 7152-KIT. Requires 7152 HCT; recommend 7074-CIT and 7074-HCT.

**For use with: 7152, 7152-KIT, 7152-MTC-2, 7152-MTC-10**

**Model 7703-306A:** DB50 male connector kit (solder cup) with shell.

**For use with: 7701, 7703, 7705, 7709**

**Model 7709-308A:** DB25 male connector kit (solder cup) with shell.

**For use with: 7701, 7707, 7709**

**Model 7712-SMA-N:** Female SMA to male N-type adapter.

**For use with: 7711, 7712**

# Connectors, Adapters, and Tools

**Model 7755 50Ω Feed-Through Terminator:** BNC-to-BNC adapter for terminating RG58 cable in its characteristic impedance. VSWR <1.1, DC–250MHz.

**For use with: RG58 Cable, 776, 3390**

**Model 7788:** 50-pin D subminiature connector kit. To mate with 50-pin connector on Model 7703 and 7705.

**For use with: 7703, 7705, 77XX modules with D sub connectors**

**Model 7789:** 50-pin/25-pin (both male) D-Shell Kit (one of each) for 7701 or 7709 Integra modules (mating connectors are supplied with these modules when purchased).

**For use with: 7701, 7709**

**Model 7790:** 50 pin male, 50 pin female, 25 pin male IDC D-Shell Connector Kit (one each).

**For use with: 7701, 7703, 7705, 7707, or 7709 Integra modules**

**Model 8610 Low Thermal Shorting Plug:** For calibration lab use, this plug provides a very low thermal offset short at front or rear inputs.

**For use with: 2000, 2001, 2002, 2010**

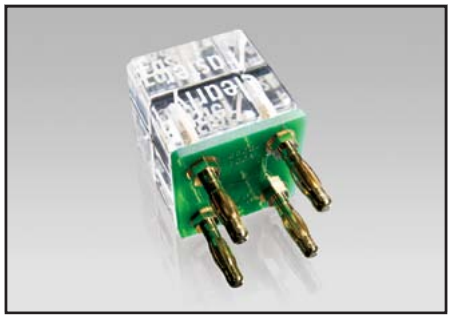

**Model 8620 Four-Wire DMM Shorting Plug:** Provides a low resistance 4-wire short to both observe and cancel DMM offset resistances and voltages to improve measurement accuracies.

**For use with: 2000, 2001, 2002, 2010, 2015, 2016, Series 2400, Series 2700, Series 3700**

**Model 8680 RTD Probe Adapter:** Provides a means of connecting RTD probes terminated in either a 4-wire instrumentation connector or bare wires to safety input jacks on a 0.5 inch spacing. Use with Models 8681, 8693, 8695, or 8696.

**For use with: 2001, 2002, 2010**

**BG-18:** Dual banana to BNC coaxial adapter for adapting connection on instrument with dual banana jack.

**For use with: 230, Series 2000, Series 2400, 2700, 2750**

**CAP-18:** Protective shield/cap for BNC connectors.

**For use with: BNC connectors**

# Connectors, Adapters, and Tools

**CAP-31:** Protective shield/cap for 3-lug triax connectors.

**For use with: 3-lug triax connectors**

**CS-400:** DB25 male solder cup.

**For use with: C126-1 cable, 213**

**CS-458:** Interlock connector kit to mate with 6517-ILC-3.

**For use with: 6517-ILC-3**

**CS-565:** Female BNC to female BNC adapter with 50Ω nominal impedance.

**For use with: 4200-SCS, BNC interconnect**

**CS-630:** 3-lug female triax bulkhead connector for soldered connection. Mates with CS-631.

**For use with: Fixtures, 6487, 6517A, 6517B**

**CS-631:** 3-slot male triax cable mount connector for use with SC-22 cable. Mates to Models 237, 486, 487, 7072, and 8006.

**For use with: 4200-SCS, SC-22 cable**

**CS-701:** BNC tee adapter (female, male, female).

**For use with: 4200-SCS**

**CS-719:** 3-lug triax jack receptacle.

**For use with: 4200-SCS**

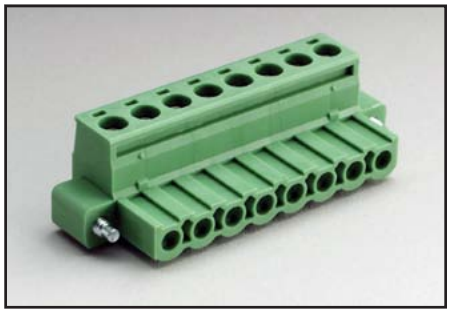

**CS-846:** Eight position connector with screw terminals for connection to test leads.

**For use with: 230X, 2510, 2510-AT**

**CS-970:** High voltage bulkhead connector.

**For use with: 248, 248-SHV cable**

# Connectors, Adapters, and Tools

**CS-1247:** SMA female to BNC male adapter
**For use with: 4200-SCS**

**CS-1249:** SMA female to SMB plug adapter
**For use with: 4200-SCS**

**CS-1251:** BNC female to SMB plug adapter
**For use with: 4200-SCS**

**CS-1252:** SMA male to BNC female adapter
**For use with: 4200-SCS**

**CS-1281:** SMA female to SMA female adapter
**For use with: 4200-SCS**

**CS-1305:** Interlock connector to mate with Model 6517B.
**For use with: 6517B**

**CS-1382:** Female MMBX jack to male SMA plug adapter with 50Ω impedance and 6GHz maximum frequency
**For use with: 4200-SCS**

**CS-1390:** Male LEMO triax to female SMA adapter
**For use with: 4200-SCS**

**CS-1391:** SMA tee adapter (female-male-female)
**For use with: 4200-SCS**

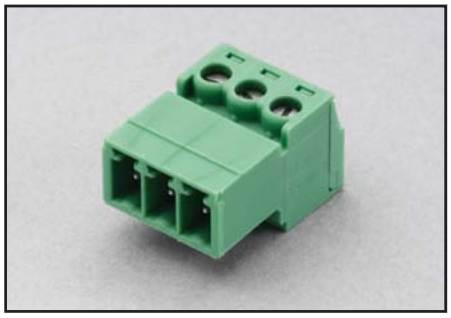

**CS-1423-3:** Miniature mating connector used as a ground connector for the Models 2635, 2635A, 2636, and 2636A.
**For use with: 2635, 2636, 2635A, 2636A**

**CS-1479:** SMA male to BNC male adapter
**For use with: 4200-SCS**

**TL-24:** SMA torque wrench
**For use with: 4200-SCS, System 46, System 46T**