


SERPAC CH6


Electronic Enclosures


NOTES:
1) When machine or I-plates modifications are required, use the center of the enclosure to dimension.

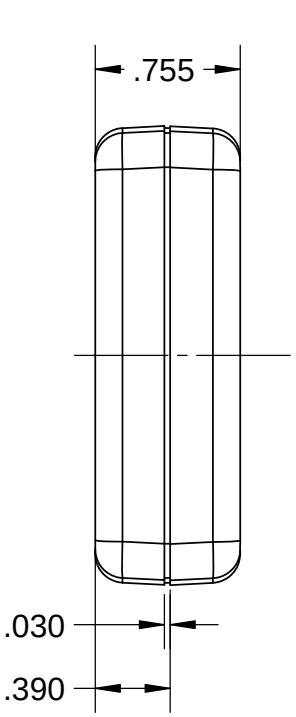


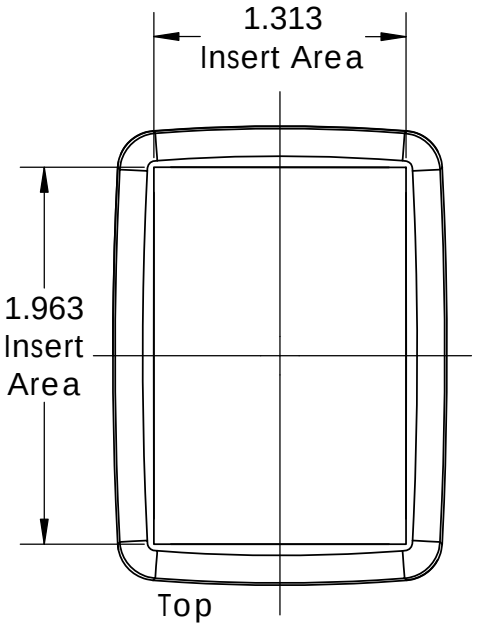

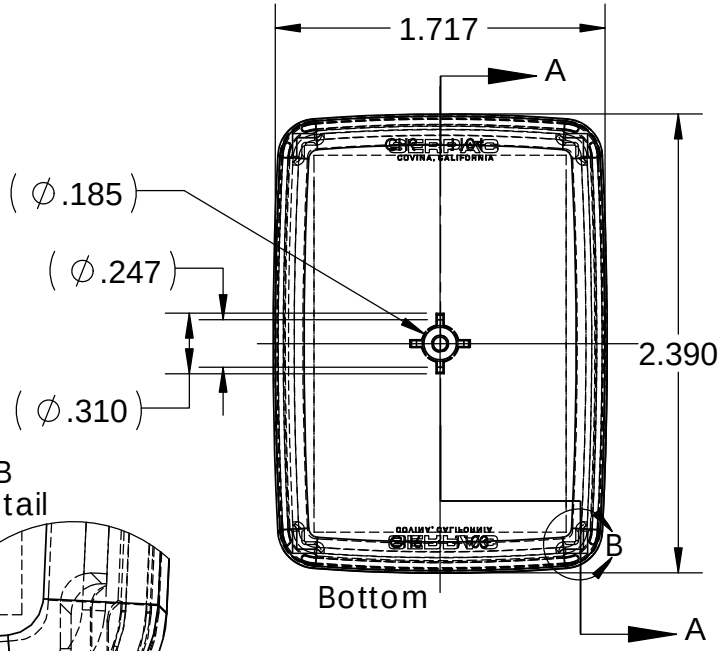



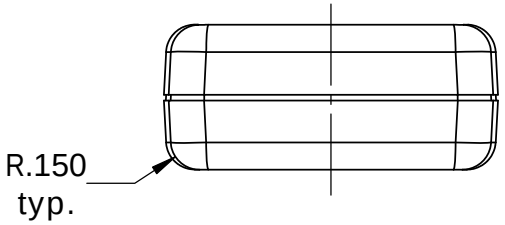

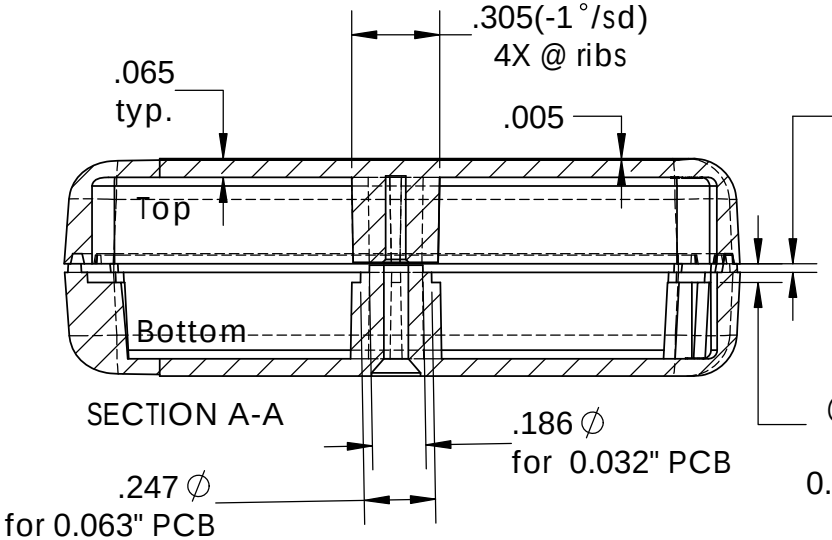


Enclosure can hold either a 0.032" PCB or a 0.063 PCB
PCB dimensions are: (PCB drawings on page 2)
0.032" [.8mm] PCB 2.16" X 1.52" (0.20" center hole)
0.063" [1.6mm] PCB 2.12" X 1.48" (0.26" center hole)

PART NO.	DESCRIPTION	ACCSESSORIES	
1103	CH6 TOP	PART NO.	DESCRIPTION
1104	CH6 BOTTOM	55	KEY HOLDER
6007	SCREW 2x3/4" PHILFLAT H/L (1)		


ALL DIMENSIONS ARE ± .010" *7/19/12*

2009 Wright Ave., La Verne, CA 91750
Ph. (626) 331-0517 Fx. (626) 331-8584 www.serpac.com

SERPAC Electronic Enclosures — CIRCUIT BOARD CH6

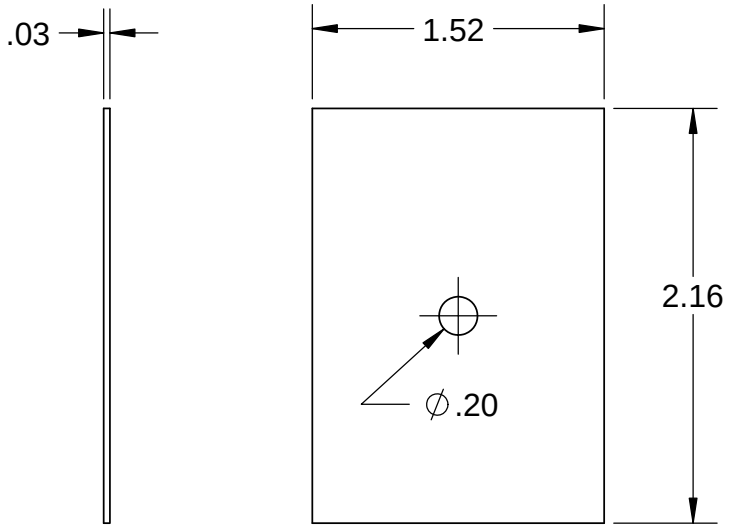

.032 board

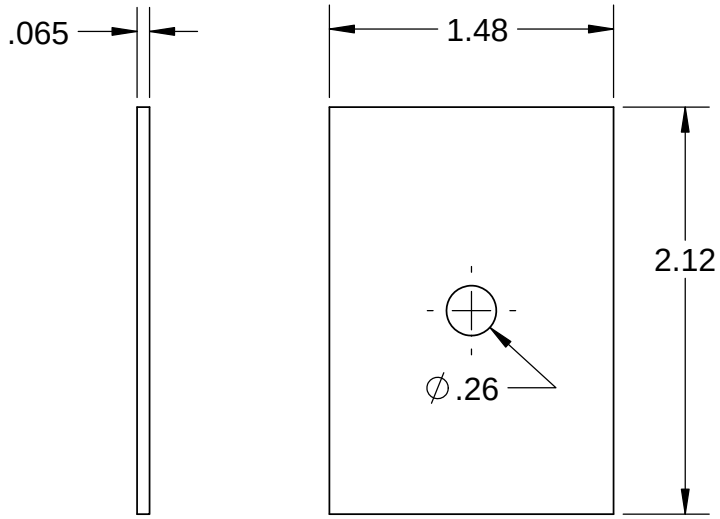

.065 board

NOTES:
These are suggested dimensions.
Plastic parts have a ±0.010" manufacturing tolerance.

2009 Wrignt Ave., La Verne, CA 91750
(626) 331-0517 Fax (626) 331-8584 http://www.serpac.com.

7/18/12