Miniature Multipurpose - ABS (1551 Series)



KEY FEATURES

- Miniature electronic enclosures, ideally suited for mounting small printed circuit boards.
- Molded in a choice of black or grey general purpose ABS plastic.
- 2 P.C. board standoffs molded into interior.
- Lap joint construction provides protection against access of dust and splashing water.
- Designed to meet IP54
- Two versions available (with or without key ring kit).
- Models with key ring kit are predrilled in narrow side.

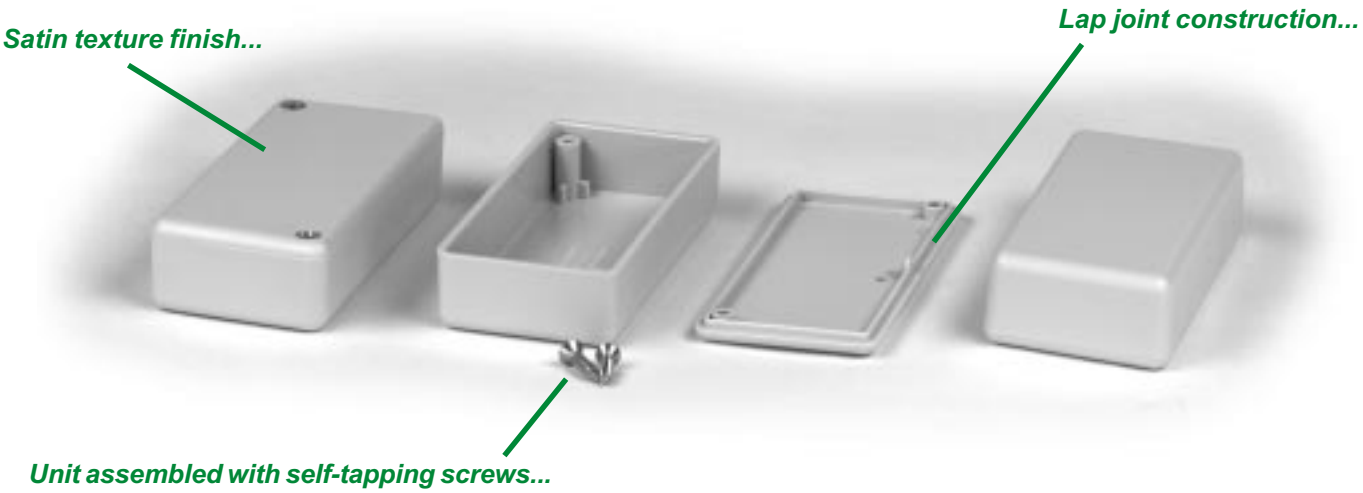

CANADA
Guelph, Ontario (519) 822-2960
St. Laurent, Quebec (514) 343-9010
USA
Cheektowaga, NY (716) 651-0086

www.hammondmfg.com

EUROPE
Basingstoke, UK +44 1256 812812

AUSTRALASIA
Queenstown, SA, Australia +61 8 8240 2244

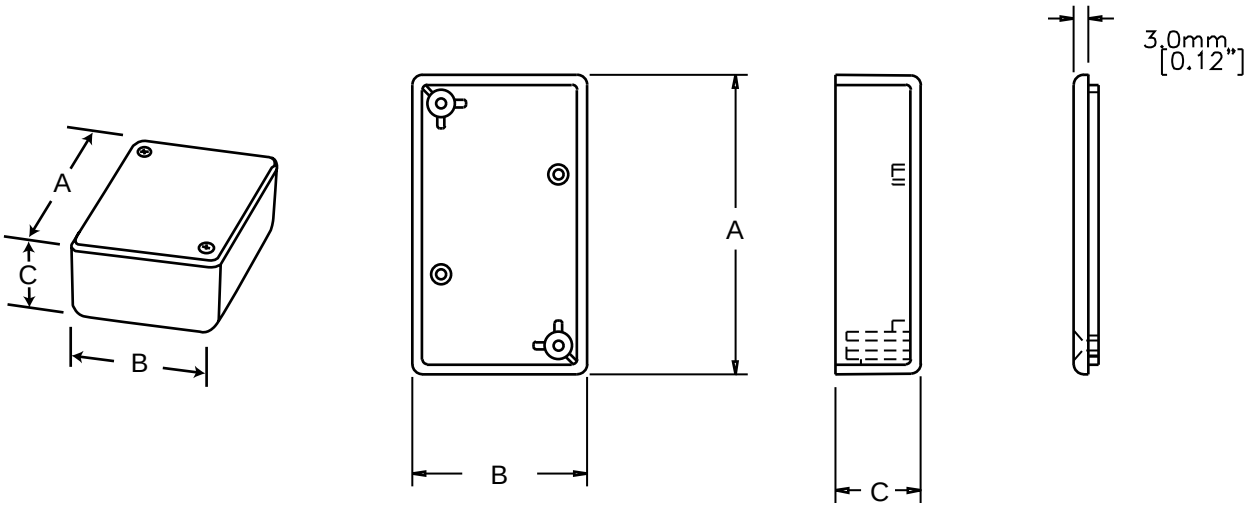

WITHOUT KEY RING KIT

Part Number		Units	Dimensions		
Black	Grey		A	B	C (No Lid)
1551GBK	1551GGY	inch	1.97	1.38	.67
		mm	50	35	17
1551HBK	1551HGY	inch	2.36	1.38	.67
		mm	60	35	17
1551KBK	1551KGY	inch	3.15	1.57	.67
		mm	80	40	17

WITH KEY RING KIT

Part Number		Units	Dimensions		
Black	Grey		A	B	C (No Lid)
1551GRBK	1551GRGY	inch	1.97	1.38	.67
		mm	50	35	17
1551HRBK	1551HRGY	inch	2.36	1.38	.67
		mm	60	35	17
1551KRBK	1551KRGY	inch	3.15	1.57	.67
		mm	80	40	17

NOTES: - Assembled height = dimension "C" + 0.12" (3.0 mm)
- Average wall thickness: 0.08" (2.0 mm)

ACCESSORIES



Internal (P.C.B.) Mount Screws
Self-tapping type, #2 x 3/16", nickel plated (used to mount P.C. board).
1551ATS100 - Package of 100



Replacement Screws
Self-tapping type, #4 x 0.5", nickel plated (used with grey enclosures).
1591TS100 - Package of 100



Key Ring Kit
Requires a 0.156" (4 mm) round hole for mounting. Consists of a tough black molded nylon post and a plated 3/4" (19 mm) key ring. **1427KR**



Replacement Screws
Self-tapping type, #4 x 0.5", black oxide (used with black enclosures).
1591TS100BK - Package of 100

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Hammond:

1591TS100 1551ATS100 1591TS100BK