HAMMOND MANUFACTURING

*Quality Products. Service Excellence.*

# Type 1 Mild Steel Splitter Trough *CST Series*

**Hinged Door with Screw**

## Application

- The splitter troughs are designed for distribution of up to 600 V (max) service using either 3 or 4 wires.

## Standards

- CSA Certified
- Complies with
  - IEC 60529, IP20

## Construction

- Formed and spot welded from 14 or 16 gauge steel.
- Factory installed splitter blocks.
- Series of knockouts on each side.
- Padlocking hasp.

## Finish

- Cover and enclosure are finished in recoatable smooth ANSI 61 gray powder coating.

## Accessories

- Splitter Blocks
- Grounding Kits




NOTE: KNOCKOUTS TYPICAL ON OPPOSITE SIDES

**Top View**




**Detail - F**

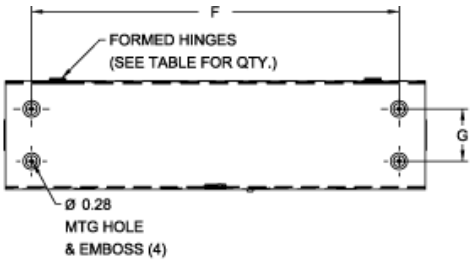


**End View**

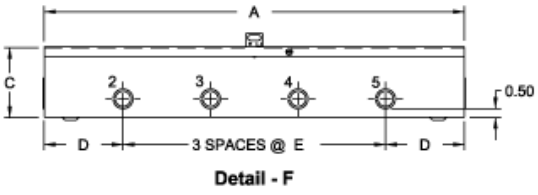


**Detail - G**

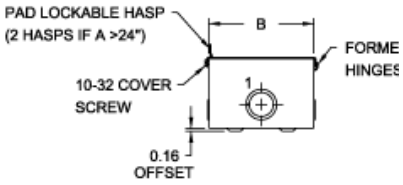


**Detail - H**

| | Part Number | | CU/AL | Dimensions | | | Ship Wt. |
|---|---|---|---|---|---|---|---|
| 3 Wire | 4 Wire | Less Blocks | Amps | H | W | D | lbs |
| **CST273** | **CST274** | - | 70/70 | 24.00 | 6.00 | 4.00 | 12 |
| **CST373** | **CST374** | - | 70/70 | 36.00 | 6.00 | 4.00 | 17 |
| **CST473** | **CST474** | - | 70/70 | 48.00 | 6.00 | 4.00 | 21 |
| **CST2103** | **CST2104** | **CST2100** | 125/120 | 24.00 | 6.00 | 4.00 | 12 |
| **CST3103** | **CST3104** | **CST3100** | 125/120 | 36.00 | 6.00 | 4.00 | 17 |
| **CST4103** | **CST4104** | **CST4100** | 125/120 | 48.00 | 6.00 | 4.00 | 21 |
| **CST6103*** | **CST6104*** | **CST6100*** | 125/120 | 72.00 | 8.00 | 5.00 | 39 |
| **CST2203*** | - | **CST2200*** | 225/225 | 24.00 | 8.00 | 5.00 | 16 |
| **CST3203*** | **CST3204*** | **CST3200*** | 225/225 | 36.00 | 8.00 | 5.00 | 22 |
| **CST4203*** | **CST4204*** | **CST4200*** | 225/225 | 48.00 | 8.00 | 5.00 | 27 |
| **CST5203*** | **CST5204*** | **CST5200*** | 225/225 | 60.00 | 8.00 | 5.00 | 33 |
| **CST6203*** | **CST6204*** | **-** | 225/225 | 72.00 | 8.00 | 5.00 | 39 |
| **CST3403*** | - | **CST3400*** | 400/340 | 36.00 | 10.00 | 6.00 | 35 |
| **CST4403*** | **CST4404*** | **CST4400*** | 400/340 | 48.00 | 10.00 | 6.00 | 45 |
| **CST5403*** | **CST5404*** | **CST5400*** | 400/340 | 60.00 | 10.00 | 6.00 | 58 |
| **CST6403*** | **CST6404*** | **CST6400*** | 400/340 | 72.00 | 10.00 | 6.00 | 62 |
| **CST4603*** | **CST4604*** | - | 600/574 | 48.00 | 10.00 | 6.00 | 45 |
| **CST5603*** | **CST5604*** | - | 600/574 | 60.00 | 10.00 | 6.00 | 58 |
| **CST6603*** | **CST6604*** | - | 600/574 | 72.00 | 10.00 | 6.00 | 62 |

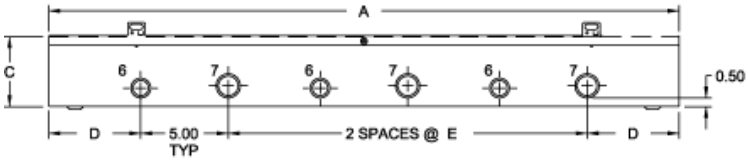* 14 gauge steel

*Data subject to change without notice*

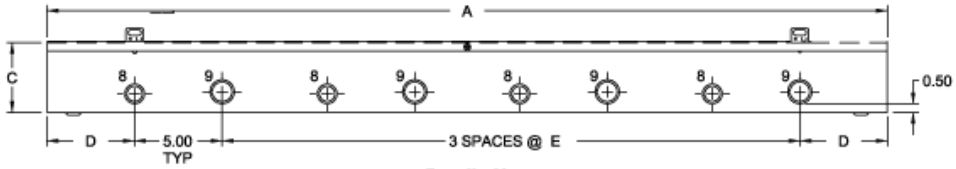© 2015. Hammond Manufacturing Ltd. All rights reserved.